

M9210-Bxx-3 Series

On/Off Electric Spring Return Actuators

Description

The M9210-Bxx-3 Series On/Off Actuators are direct-mount, spring return electric actuators that operate on AC 24 V power at 50/60 Hz, DC 24 V power, AC 120 V power at 60 Hz, or AC 230 V power at 50/60 Hz. These bidirectional actuators do not require a damper linkage, and are easily installed on dampers with 1/2 to 3/4 in. or 12 to 19 mm round shafts, or 3/8 and 1/2 in. or 10, 12, and 14 mm square shafts using the standard shaft clamp included with the actuator. An optional M9220-600 Jackshaft Coupler Kit is available for 3/4 to 1-1/16 in. or 19 to 27 mm round shafts, or 5/8 and 3/4 in. or 16, 18, and 19 mm square shafts.

The M9210-Bxx-3 Series On/Off Electric Spring Return Actuators provide a running and spring return torque of 89 lb-in (10 N-m). Integral line voltage auxiliary switches are available on the BxC models to indicate end-stop position, or to perform switching functions within the selected rotation range.

Refer to the *M9210-Bxx-3 Series On/Off Electric Spring Return Actuators Product Bulletin (LIT-12011035)* for important product application information.

Features

- reversible mounting design simplifies installation and enables the actuator to spring return in either direction
- removable coupler adapts to a shorter damper shaft
- electronic stall detection throughout the entire rotation range extends the life of the actuator by deactivating the actuator motor when an overload condition is detected
- integral 48 in. (1.2 m) halogen-free cables with colored and numbered conductors simplify field wiring
- integral auxiliary switches (BxC models) provide one fixed and one adjustable switch point with line voltage capability
- NEMA 2 (IP54) rated aluminum enclosure protects the internal components of the actuator from dirt and moisture
- easy-to-use locking manual override with auto release and crank storage allows for manual positioning of the actuator hub
- integral connectors for 3/8 in. flexible metal conduit simplify installation and field wiring



**M9210-Bxx-3 Series
On/Off Electric Spring Return Actuator**

Applications

The M9210-Bxx-3 Series On/Off Electric Spring Return Actuators are designed to position return air, exhaust air, or outside air dampers in Heating, Ventilating, and Air Conditioning (HVAC) systems. Refer to the manufacturer's information to properly size the damper and/or actuator.

Selection Chart


Code Number	Control Type	Auxiliary Switches	Power Requirements
M9210-BGA-3	On/Off	None	AC 24 V at 50/60 Hz or DC 24 V
M9210-BGC-3	On/Off	Two	AC 24 V at 50/60 Hz or DC 24 V
M9210-BAA-3	On/Off	None	AC 120 V at 60 Hz
M9210-BAC-3	On/Off	Two	AC 120 V at 60 Hz
M9210-BDA-3	On/Off	None	AC 230 V at 50/60 Hz
M9210-BDC-3	On/Off	Two	AC 230 V at 50/60 Hz

Accessories and Repair Parts

Code Number	Description
DMPR-KC003 ¹	7 in. (178 mm) Blade Pin Extension (without Bracket) for Johnson Controls® Direct-Mount Damper Applications
M9000-200	Commissioning Tool that Provides a Control Signal to Drive 24 V On/Off, Floating, Proportional, and/or Resistive Electric Actuators
M9000-604	Replacement Anti-Rotation Bracket Kit (with Screws) for M9210-Bxx-3 Series On/Off Electric Spring Return Actuators
M9220-600	1 in. (25 mm) Jackshaft Coupler Kit (with Locking Clip) for Mounting M9210-Bxx-3 Series On/Off Electric Spring Return Actuators on Dampers with 3/4 to 1-1/16 in. or 19 to 27 mm Round Shafts, or 5/8 and 3/4 in. or 16, 18, and 19 mm Square Shafts
M9220-601	Replacement Coupler Kit (with Locking Clip) for Mounting M9210-Bxx-3 Series On/Off Electric Spring Return Actuators on Dampers with 1/2 to 3/4 in. or 12 to 19 mm Round Shafts, or 3/8 and 1/2 in. or 10, 12, and 14 mm Square Shafts
M9220-602	Replacement Locking Clips for M9210-Bxx-3 Series On/Off Electric Spring Return Actuators (Five per Bag)
M9220-603	Adjustable Stop Kit for M9210-Bxx-3 Series On/Off Electric Spring Return Actuators
M9220-604	Replacement Manual Override Cranks for M9210-Bxx-3 Series On/Off Electric Spring Return Actuators (Five per Bag)
M9220-610	Replacement Shaft Gripper, 10 mm Square Shaft with Locking Clip
M9220-612	Replacement Shaft Gripper, 12 mm Square Shaft with Locking Clip
M9220-614	Replacement Shaft Gripper, 14 mm Square Shaft with Locking Clip

1. Furnished with the damper and may be ordered separately.

On/Off Electric Spring Return Actuators (Continued)

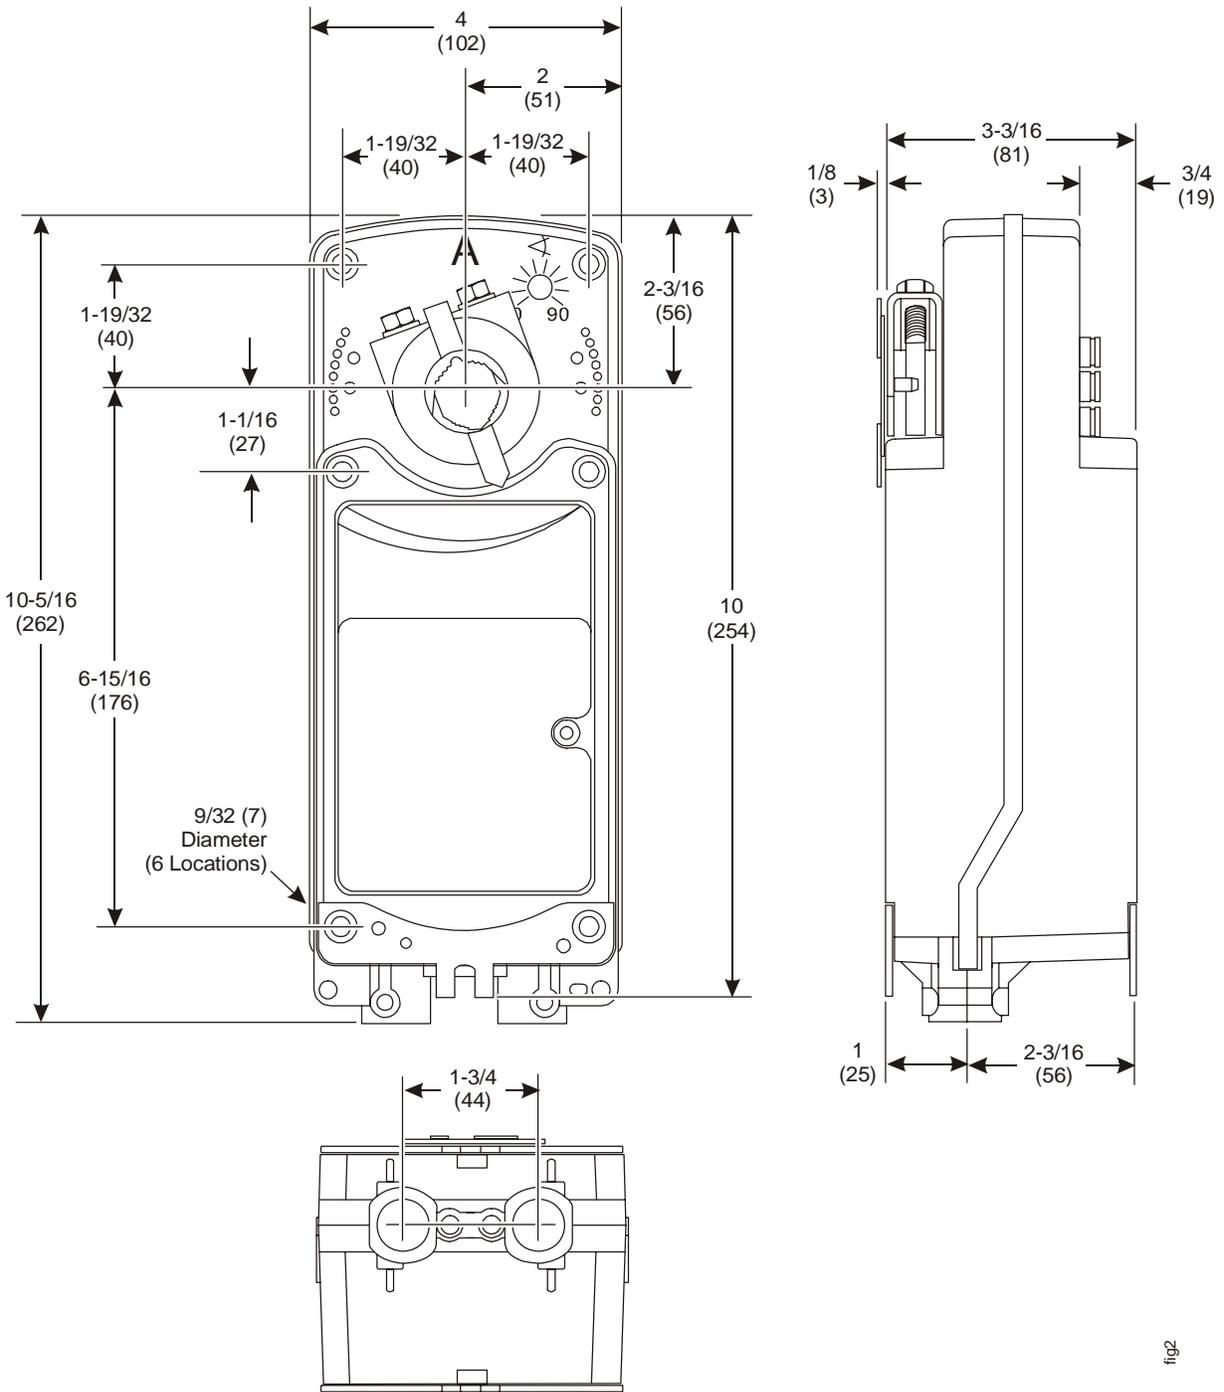

**M9210-Bxx-3 Series
On/Off Electric Spring Return Actuator Dimensions, in. (mm)**

fig2

On/Off Electric Spring Return Actuators (Continued)

Technical Specifications

M9210-Bxx-3 Series On/Off Electric Spring Return Actuators		
Power Requirements	BGx Models	Nominal AC 24 V at 50/60 Hz: Class 2, 17.7 VA Running, 5.1 VA Holding Position; Nominal DC 24 V: Class 2, 15.6 W Running, 2.6 W Holding Position
	BAx Models	Nominal AC 120 V at 60 Hz: 0.20 A Running, 0.12 A Holding Position
	BDx Models	Nominal AC 230 V at 50/60 Hz: 0.12 A Running, 0.09 A Holding Position
Auxiliary Switch Rating	BxC Models	Two Single-Pole, Double-Throw (SPDT), Double-Insulated Switches with Gold Flash Contacts: AC 24 V, 50 VA Pilot Duty; AC 120 V, 5.8 A Resistive, 1/4 hp, 275 VA Pilot Duty; AC 240 V, 5.0 A Resistive, 1/4 hp, 275 VA Pilot Duty
Spring Return		Direction is Selectable with Mounting Position of Actuator: Side A, Actuator Face Away from Damper for CCW Spring Return; Side B, Actuator Face Away from Damper for CW Spring Return
Running and Spring Return Torque		89 lb-in (10 N-m)
Rotation Range		Adjustable from 30 to 90° or CCW with Optional M9220-603 Adjustable Stop Kit; Mechanically Limited to 90°
Rotation Time	Power On (Running)	24 to 57 Seconds for 0 to 89 lb-in (0 to 10 N-m) at All Operating Conditions; 35 Seconds Nominal at Full Rated Load
	Power Off (Spring Returning)	11 to 15 Seconds for 0 to 89 lb-in (0 to 10 N-m) at Room Temperature; 35 Seconds Maximum for 0 to 89 lb-in (0 to 10 N-m) at -22°F (-30°C) 130 Seconds Maximum for 0 to 89 lb-in (0 to 10 N-m) at -40°F (-40°C)
Cycles		60,000 Full Stroke Cycles
Audible Noise Rating	Power On (Running)	66 dBA Nominal at 39-13/32 in. (1 m)
	Power On (Holding)	18 dBA Nominal at 39-13/32 in. (1 m)
	Power Off (Spring Returning)	66 dBA Nominal at 39-13/32 in. (1 m)
Electrical Connections	Actuator (All Models)	48 in. (1.2 m) Halogen-Free Cable with 18 AWG (0.75 mm ²) Wire Leads
	Auxiliary Switches (BxC Models)	48 in. (1.2 m) Halogen-Free Cable with 18 AWG (0.75 mm ²) Wire Leads
Conduit Connections		Integral Connectors for 3/8 in. Flexible Metal Conduit
Mechanical Connections	Standard Shaft Clamp Included with Actuator	1/2 to 3/4 in. or 12 to 19 mm Diameter Round Shafts, or 3/8 and 1/2 in. or 10, 12, and 14 mm Square Shafts
	Optional M9220-600 Jackshaft Coupler Kit	3/4 to 1-1/16 in. or 19 to 27 mm Diameter Round Shafts, or 5/8 and 3/4 in. or 16, 18, and 19 mm Square Shafts
Aluminum Enclosure		NEMA 2 (IP54) for All Mounting Orientations
Ambient Conditions	Operating	-40 to 131°F (-40 to 55°C); 90% RH Maximum, Noncondensing
	Storage	-85 to 185°F (-65 to 85°C); 95% RH Maximum, Noncondensing
Compliance	North America	UL Listed, File E27734, CCN XAPX (United States) and XAPX7 (Canada)
	European Union	CE Mark, EMC Directive 89/336/EEC (BGx and BDx Models)
		CE Mark, Low Voltage Directive 73/23/EEC (BGC and BDx Models)
Australia and New Zealand	C-Tick Mark, Australia/NZ Emissions Compliant (BGx and BDx Models)	
Shipping Weight	BAx and BDx Models	7.6 lb (3.5 kg)
	BGx Models	6.4 lb (2.9 kg)