

# PANEL FABRICATION

## SNK SERIES DIN RAIL DISCONNECT SWITCH AND FUSE HOLDERS ZS4 SERIES DISCONNECT SWITCH AND FUSE HOLDERS



**ABB**

### DESCRIPTION

The **ABB SNK ZS4 Series disconnect switches and fuse holders** provide a safe method for protecting or isolating a circuit. Once installed the fuse is enclosed and prohibits the installer from coming in contact with live circuit. You can quickly identify the defective circuit by the blown fuse indicator on some models.

### FEATURES


- Fits both 5x20mm and 5x25mm fuses
- Wiring of terminal block can be done when fuseholder is in closed position
- Blown fuse indicator for quick identification of fuse failures
- DIN Rail mount



### SPECIFICATIONS

<b>Rated Voltage</b>	600 VAC/VDC max.	<b>Operating Temperature</b>	-67° to 230°F (-55° to 110°C)
<b>Rated Current</b>	6.3 A	<b>Approvals</b>	CE, UL File #E60645; CSA #2329965, RoHs
<b>Rated Wire Size</b>	24-12 AWG	<b>Warranty</b>	1 year
<b>Fuse Size</b>	K235 Series 0.197" x 0/787" (0.5 x 2.0 cm)		

### DIMENSIONS

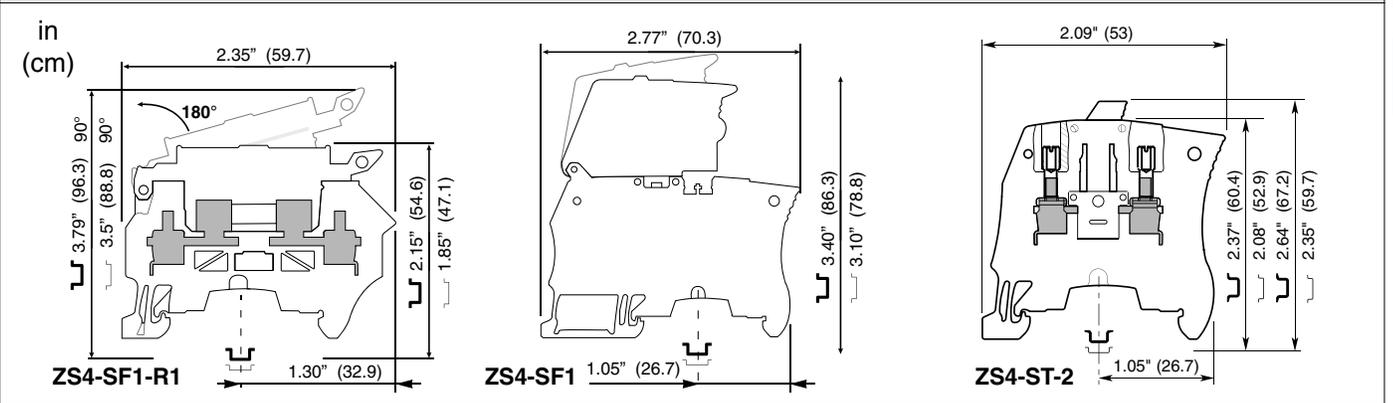

### ORDERING INFORMATION

MODEL	DESCRIPTION
<b>ZS4-S-T2</b>	2cm blade disconnect with handle and 2 test sockets - grey
<b>ZS4-SF1</b>	2cm fuseholder with handle, grey/dark grey (fuse not included)
<b>ZS4-SF1-R1</b>	2cm fuseholder with handle blown fuse indicator 24-60V - grey/dark grey (fuse not included)
<b>ZS4-SF1-R3</b>	2cm fuseholder and blown fuse indicator 115-250V - grey/dark grey (fuse not included)
<b>ES4-SF</b>	End section - dark grey

### RELATED PRODUCTS

**K235-(amp)** Fast acting fuses for 2 cm fuse holder (10A fuse maximum)