



**PSH100A100A Series**

Enclosed Dual 100 VA Power Supplies, 120 to 24 Vac



• Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.\*

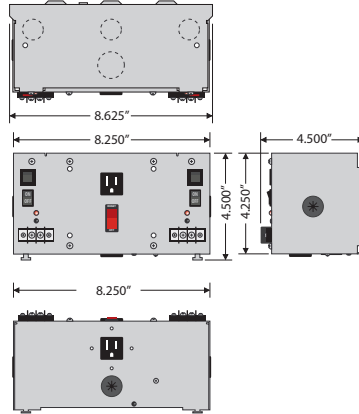

**AC Power Supply**



**PSH100A100A Series Selection Guide**

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH100A100A	•			External Terminal Strip
PSH100A100AN				External Terminal Strip
PSH100A100ANW				Internal Wires
PSH100A100AW	•			Internal Wires
PSH100A100AB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH100A100ANB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH100A100ANWB10**	•	•	10 Amp Switch / Breaker	Internal Wires
PSH100A100AWB10**	•	•	10 Amp Switch / Breaker	Internal Wires

**Specifications**

**Transformer:** Two 100 VA Split-Bobbin  
**Over Current Protection:** Circuit Breaker  
**Frequency:** 50/60 Hz  
**24 Vac ON/OFF:** On / Off Switch & Breaker  
**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)\*\*  
 Total Combined Output 9A  
**Approvals:** Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS  
**Dimensions:** 4.500" x 8.625" x 4.500"  
**Weight:** 8.600 lbs.

**Input Wires:** "B10" Models Only  
Input Power Wires  
 BLK: 120 Vac  
 WHT: Neutral  
 GRN: Ground

Outlet Wires  
 BLK: 120 Vac  
 WHT: Neutral  
 GRN: Ground

**Output Wires:** "B10" Models Only  
Auxiliary Output  
 BLU: 120 Vac

All Other Models  
Primary Wires  
 BLK: 120 Vac  
 WHT: Common

"W" Models Only  
Transformer Output  
 WHT/YEL: 24 Vac  
 WHT/BLU: Common

**Notes:**

- All dual models: Model number denotes location of transformer within enclosure.  
**Ex: PSH40A100A**  
 | |  
**Left side Right side**
- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- To order UL508, add "-IC" to end of model number.