


**PSH40A Series**

Enclosed Single 40 VA Power Supplies, 120 to 24 Vac

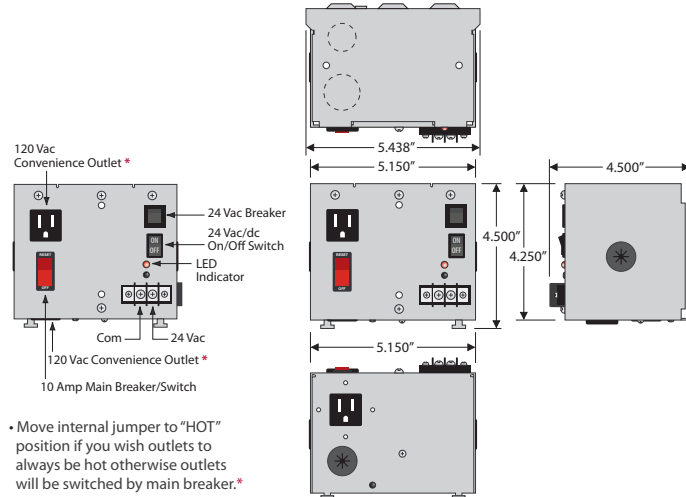

• Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.\*

**AC Power Supply**



**PSH40A Series Selection Guide**

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH40A	•			External Terminal Strip
PSH40AN				External Terminal Strip
PSH40ANW				Internal Wires
PSH40AW	•			Internal Wires
PSH40AB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40ANB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40ANWB10**	•	•	10 Amp Switch / Breaker	Internal Wires
PSH40AWB10**	•	•	10 Amp Switch / Breaker	Internal Wires

**Specifications**

**Transformer:** One 40 VA Split-Bobbin  
**Over Current Protection:** Circuit Breaker  
**Frequency:** 50/60 Hz  
**24 Vac ON/OFF:** On / Off Switch & Breaker  
**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)\*\*  
 Total Combined Output 9A  
**Approvals:** Class 2 (UL Approved UL5085-3), UL916, UL508, C-UL, CE, RoHS  
**Dimensions:** 4.500" x 5.438" x 4.500"  
**Weight:** 4.00 lbs.

**Input Wires:** "B10" Models Only  
Input Power Wires  
 BLK: 120 Vac  
 WHT: Neutral  
 GRN: Ground  
Outlet Wires  
 BLK: 120 Vac  
 WHT: Neutral  
 GRN: Ground

All Other Models  
Primary Wires  
 BLK: 120 Vac  
 WHT: Common

**Output Wires:** "B10" Models Only  
Auxiliary Output  
 BLU: 120 Vac

"W" Models Only  
Transformer Output  
 WHT/YEL: 24 Vac  
 WHT/BLU: Common

**Notes:**

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- To order UL508, add "-IC" to end of model number.