

# PANEL FABRICATION




## ABB DIN RAIL SWITCH & FUSE HOLDERS M4/6 SNBT1, M4/8SF, M10/16SFL

### DESCRIPTION

The **ABB Model M4/8SF, M4/8SFL, and M10/16SFL fuse holders** provide a safe method for protecting or isolating a circuit. Once installed, the fuse is enclosed and prohibits the installer from coming in contact with a live circuit. The fuse can be disengaged by pulling up on the fuseholder. Optional blown fuse indicators are available. **Model M4/6SNBT1** is a non-fusible disconnect switch that provides a safe method for isolating a circuit.

### FEATURES

- Wire secured by ribbed compression clamp
- Universal DIN rail mounting
- Unique disconnect design

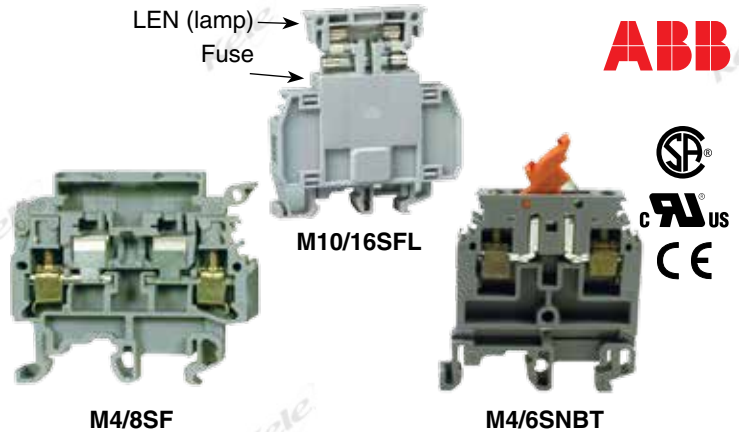

### SPECIFICATIONS

#### Rated Voltage

M4/6	300 VAC/VDC max.
M4/8	600 VAC/VDC max.
M10/16	600 VAC/VDC max.

#### Rated Current

M4/6	20 A
M4/8	6.3 A
M10/16	10 A

#### Rated Wire Size

M4/6	22-10 AWG
M4/8	22-12 AWG
M10/16	18-8 AWG


#### Fuse Size

M10/16SFL	GF Series 0.25" x 1.25" (0.63 x 3.17 cm)
M4/8	K235 Series 0.197" x 0.787" (0.5 x 2.0 cm)

#### Approvals Warranty

UL File #E60645; CSA, CE  
1 year

### DIMENSIONS

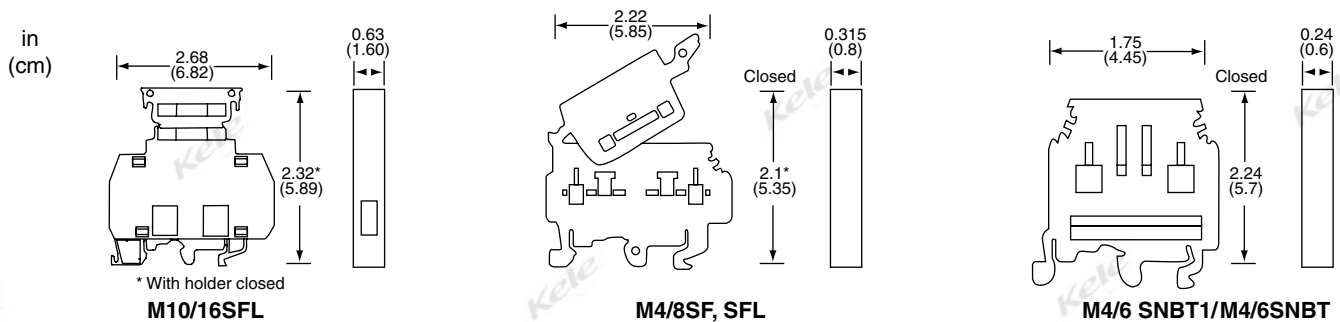

### ORDERING INFORMATION

#### MODEL SWITCH

M4/6SNBT	6 mm blade switch block (with test sockets). gray/orange handle
M4/6SNBT1	6 mm blade switch block (with test sockets). gray handle
FEM62	End section for M4/6SNBT

#### M4/8 FUSEHOLDER

M4/8SF	8 mm fuseholder (K235 fuse not included)
M4/8SFL	8 mm fuseholder with neon lamp (K235 fuse not included)
FEM8S	8 mm fuseholder end section
K235-(amp)	Fast acting fuses for 8 mm fuse holder (10A fuse maximum)

#### M10/16SFL FUSEHOLDER

M10/16SFL	16 mm fuseholder (GF fuse not included)
LEN	Fuse indicator lamp (110-220 VAC only)
GF-(amp)	Fast acting fuse

### RELATED PRODUCTS

BAM2	End stop
DINRALU	DIN rail, aluminum, 39.4" (1m)
DINRSTL	DIN rail, steel, 39.4" (1m)
M4/6	DIN rail terminal block 6 mm