

ELECTRICAL WIRING MATERIALS

COMMUNICATION AND CONTROL CABLE CBL SERIES



DESCRIPTION

The **CBL Series** offers a selection of high quality wire and cables that can be used for building communication and panel wiring. Additional cable types and sizes are available.

FEATURES


- *Plenum and non-plenum communication cables*
- *Thermostat wire for connecting to any thermostat*
- *300 volts rated*
- *UL File #E116676 for type CL3P or Type CL3R*
- *One year warranty*



CBL-TP Series



CBL-TW Series

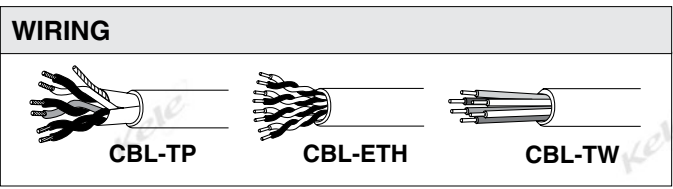

4
ELECTRICAL WIRING MATERIALS

ORDERING INFORMATION

Model	Jacket Color	Number Of Conductors	Number Of Pairs	AWG Size	Plenum Rating	Shielding	Standard Package	Type	Weight lb (Kg)
TWISTED PAIR (22 AWG)									
CBL-TP222SN	Gray	2	1	22	Non-plenum	Shielded	1000 ft (305 m)	Spool	13.02 (5.91)
CBL-TP224SN	Gray	4	2	22	Non-plenum	Shielded	1000 ft (305 m)	Spool	19.38 (8.79)
CBL-TP226SN	Gray	6	3	22	Non-plenum	Shielded	1000 ft (305 m)	Spool	27.90 (12.66)
CBL-TP222SP	White	2	1	22	Plenum	Shielded	1000 ft (305 m)	Spool	15.56 (7.06)
CBL-TP224SP	White	4	2	22	Plenum	Shielded	1000 ft (305 m)	Spool	21.74 (9.86)
TWISTED PAIR (18 AWG)									
CBL-TP182SN	Gray	2	1	18	Non-plenum	Shielded	1000 ft (305 m)	Spool	20.85 (9.46)
CBL-TP184SN	Gray	4	2	18	Non-plenum	Shielded	1000 ft (305 m)	Spool	37.25 (16.9)
CBL-TP186SN	Gray	6	3	18	Non-plenum	Shielded	1000 ft (305 m)	Spool	56.30 (25.54)
CBL-TP182SP	White	2	1	18	Plenum	Shielded	1000 ft (305 m)	Spool	24.68 (11.19)
CBL-TP184SP	White	4	2	18	Plenum	Shielded	1000 ft (305 m)	Spool	41.00 (18.6)
CBL-TP186SP	White	6	3	18	Plenum	Shielded	1000 ft (305 m)	Spool	69.10 (31.34)
THERMOSTAT WIRE									
CBL-TW185UN	Brown	5	None	18	Non-plenum	Unshielded	250 ft (76 m)	Spool	25.00 (11.34)
CBL-TW185UP	White	5	None	18	Plenum	Unshielded	250 ft (76 m)	Spool	25.00 (11.34)
CBL-TW186UN	Brown	6	None	18	Non-plenum	Unshielded	250 ft (76 m)	Spool	3.00 (1.36)
CBL-TW186UP	White	6	None	18	Plenum	Unshielded	250 ft (76 m)	Spool	3.00 (1.36)
CBL-TW188UN	Brown	8	None	18	Non-plenum	Unshielded	250 ft (76 m)	Spool	3.00 (1.36)
CBL-TW188UP	White	8	None	18	Plenum	Unshielded	250 ft (76 m)	Spool	3.00 (1.36)
CAT5E ETHERNET									
CBL-ETH248UN	Gray	8	4	24	Non-plenum	Unshielded	1000 ft (305 m)	Spool	15.00 (6.8)
CBL-ETH248UP	Gray	8	4	24	Plenum	Unshielded	1000 ft (305 m)	Spool	15.00 (6.8)
MSTP									
CBL-MSTP182SP	Natural	2	1	18	Plenum	Shielded	1000 ft (305 m)	Spool	56.00 (25.4)
CBL-MSTP222SP	Teal	2	1	22	Plenum	Shielded	1000 ft (305 m)	Spool	21.00 (9.53)