



FLOW SWITCH FS1-6

DESCRIPTION

The Kele FS1-6 Series paddle flow switch is designed to prove liquid flow in a wide variety of HVAC and industrial applications. The corrosion-resistant flow switch is mounted in a weather-resistant box for simple wiring connections. The polyphenylene sulfide plastic vane is field trimmable for 1" (2.54 cm) and larger pipes, and it is magnetically coupled to the SPDT switch to prevent liquid from entering the switch housing.



FEATURES

- Weather-resistant construction
- Simple installation
- Leak-proof magnetic switch operation
- Field adjustable for 1" (2.54 cm) and larger pipes
- SPDT snap-acting switch


SPECIFICATIONS

Relay Output	5A resistive, 3A inductive @ 30 VDC
Relay Type	SPDT; black wire = common, red wire = normally open (at no flow), blue wire = normally closed (at no flow)
Wiring	18" (46 cm) leads, 18 AWG
Pipe Size Range	1" to 6" (2.5 to 30 cm)
Connections	1" MNPT
Media Temperature Range	212°F (100°C) maximum
Maximum System Pressure	150 psig (1 bar)
Materials Of Construction	Wetted parts: Polyphenylene sulfide vane, ceramic 8 magnet, 316 stainless steel spring and pin
Weight	1 lb (0.45 kg)
Warranty	1 year

WIRING

Black - Common
 Red - Normally open (no flow)
 Blue - Normally closed (no flow)

DIMENSIONS

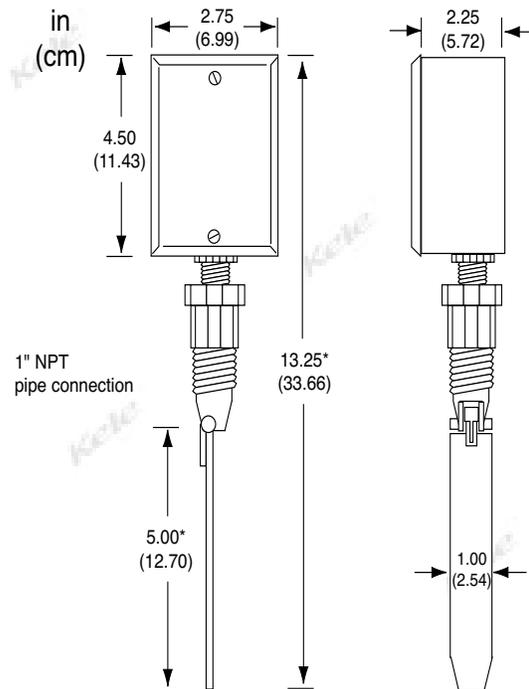

* Dimension with vane full length for 6" and larger pipe installation



INSTALLATION

- Carefully unpack switch, making sure to remove any packing from the lower housing. Adjust the actuation or deactuation point by trimming the vane to the length desired. If using a pipe with weld-o-let, cond-o-let, or plastic PVC fittings, use graduations indicated on the vane. If using standard 125 or 250 lb (57 or 113 kg) bronze, iron, or steel fittings, trim the vane 0.125" (0.32 cm) above the marking provided. Because of the great variation in fittings and process connections, it is recommended the unit be checked when installed to ensure proper operation and that there is no interference between the vane and the fittings. For pipes larger than 6" (15.24 cm), leave the vane full length.
- This flow switch is intended to be used in clean process media where particles, scale, and debris are not present. Buildup of such materials may cause inaccurate signals.
- The switch must be indexed during installation in the line with the flow arrow on the side of the switch pointing in the direction of the flow. Pipe sealant is required at the 1" NPT thread connection. It is important to not get the sealant in the vane assembly as it may prevent proper operation and cause misleading signals. When installing the unit, be certain not to over-torque the housing. Damage may occur if excessive force is used.
- Connect the switch wires in accordance with local electrical codes. The FS1-6 is not intended to be a load-carrying conduit connection. Loads may damage the switch and stop operation.

PERFORMANCE

PIPE SIZE	ACTUATION gpm (lpm)	DEACTUATION gpm (lpm)
1	10.7 (40.5)	9.3 (35.2)
1.25	9.5 (36.0)	7.7 (29.1)
1.5	8.1 (30.7)	6.3 (23.9)
2	9.8 (37.1)	8.5 (32.2)
3	12.4 (46.9)	8.9 (33.7)
4	20.2 (76.5)	12.7 (48.1)
6	43.0 (163)	32.8 (124)
8	74.2 (281)	56.6 (214)
10	116.7 (442)	89.0 (337)
12	167.1 (632)	127.4 (482)

ORDERING INFORMATION

MODEL	DESCRIPTION
FS1-6	Weather-resistant flow switch