

Description and Application

The KMC SSS-1000 sensors are designed to sense differential pressure in the inlet section of VAV (Variable Air Volume) terminal units and fan terminal units. They can also be used to sense differential pressure at other locations in the main or branch duct systems. The differential pressure read between the high "H" port and the low "L" port can be used to determine the air flow.

Models offer up to four sensing points and sensing lengths of 3-5/32 to 9-29/32 inches to accommodate box size diameters of 4 to 16 inches.

These sensors are typically used in conjunction with the CSC-1000/2000/3000 series, CSP-4000/5000 series, KMD-7000 series, and BAC-7000 series of VAV controllers for individual zone control in HVAC systems.

With CSC-3000 series, CSP-4000/5000 series, KMD-7000 series, and BAC-7000 series controllers, use an HFO-0108 3/8" to 1/4" barb union adapter and appropriate polyethylene tubing to the sensor and controller. For maximum accuracy in the CSP-5000 series, KMD-7000 series, and BAC-7000 series controllers, the 3/8" OD tubing between the sensor and the adapter should be as short as possible, and the 1/4" OD tubing from the adapter to the controller should be 24" long (on both the High and the Low sides).

Accessories

HFO-0108 3/8" x 1/4" barb union adapter



Still... Made in the U.S.A.


Models

SSS-1002	One sensing point, 3-5/32" (80 mm) length
SSS-1003	Two sensing points, 5-13/32" (137 mm) length
SSS-1004	Three sensing points, 7-21/32" (195 mm) length
SSS-1005	Four sensing points, 9-29/32" (252 mm) length

NOTE: For maximum measurement accuracy, install the longest sensor that will fit in the duct.

Specifications

Material	Light gray ABS/ polycarbonate (UL94-5V)
Mounting	Integral flange with gasket
Connection	1/4" (6 mm) nipple for 3/8" (10 mm) OD polyethylene tubing
Weight	1 oz. (28 grams)
Temperature Limits	
Operating	40 to 120° F (4 to 49° C)
Shipping	-40 to 140° F (-40 to 60° C)

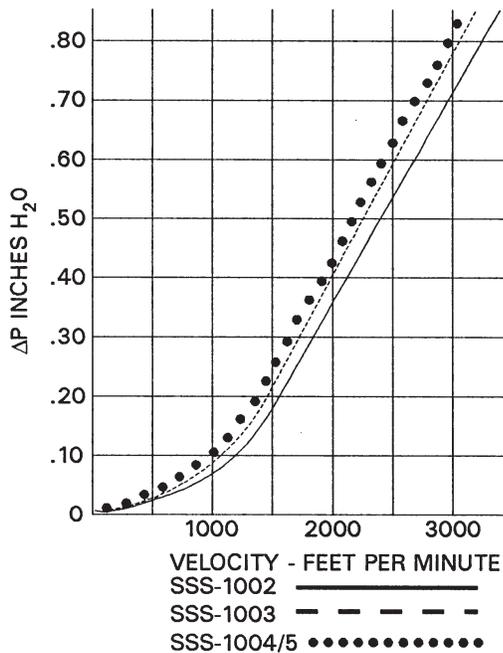


FPM = K x SQRT(ΔP)	
Model	K
SSS-1002	3450
SSS-1003	3300
SSS-1004	3200
SSS-1005	3200

Feet per minute equals the (relevant model) K factor times the square root of the differential pressure.

Dimensions and Details

All dimension are in inches (mm)

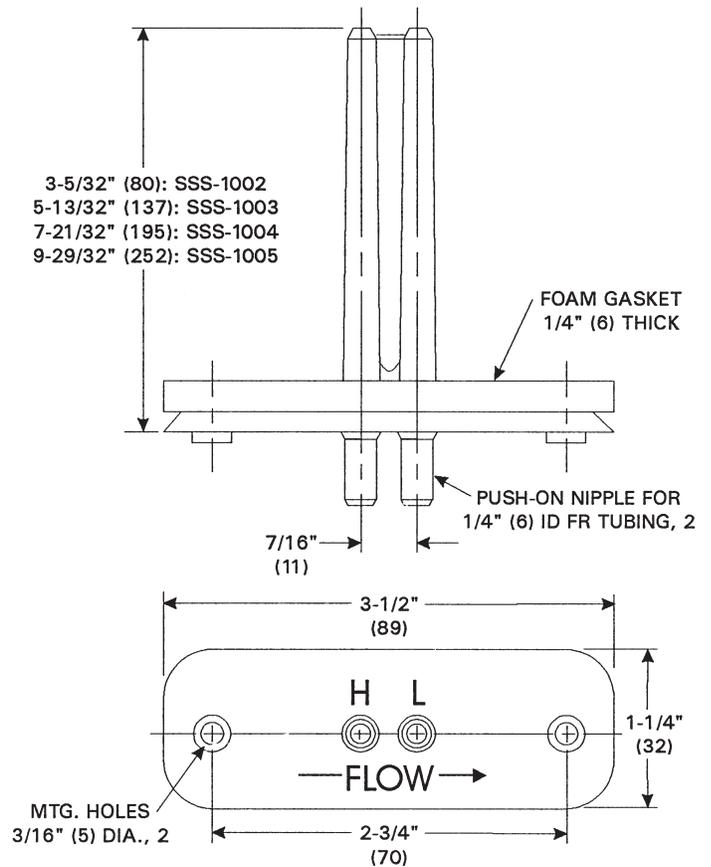

KMC Controls, Inc.

19476 Industrial Drive, New Paris, IN 46553

574.831.5250

www.kmcccontrols.com

info@kmcccontrols.com