

GREYSTONE ENERGY SYSTEMS INC

CARBON DIOXIDE, TEMPERATURE & HUMIDITY DETECTORS CDD5 Series



Space w/Setpoint, Override
& LCD



Space w/ No Options




Duct

Precision carbon dioxide control/sensing

FEATURES:

- Space or Duct Models
- 2 Available Ranges
- CO₂, Temperature Outputs
- Optional Slidepot and/or Override
- Optional On-board Relay
- Optional LCD Display
- Custom Logos Available

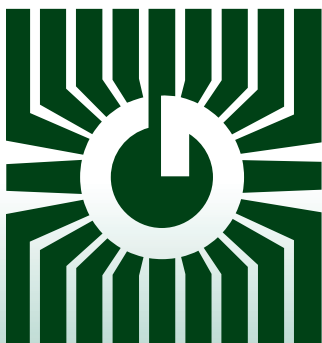

*Peace of mind
through reliable
gas sensors*

GREYSTONE HAS AN **ISO 9001** REGISTERED QUALITY SYSTEM

CO₂, TEMPERATURE & HUMIDITY DETECTOR

SPECIFICATIONS:

General Specifications:

Power Supply.....	20-28 Vac/dc (non-isolated half-wave rectified)
Output Signals.....	Current 4-20mA (Model CDD5A or Voltage 0-5 Vdc or 0-10 Vdc (Model CDD5B)
Consumption.....	Current: 145 mA max @ 24Vdc, 260 mA max @ 24 Vac (with all options) Voltage: 85 mA max @ 24 Vdc, 150 mA max @ 24 Vac (with all options)
Output Drive Capability.....	Current: 550 ohms max Voltage: 10 Kohm min
Output Resolution.....	10 bit PWM
Protection Circuitry.....	Reverse voltage protected and output limited
Operation Conditions.....	0°-50°C (32°-122°F), 0-95% RH non-condensing.
Sensor Coverage Area.....	100 m ² (1000 ft ²) typical
Wiring Connections.....	Screw terminal block (14 to 22 AWG)
External Dimensions.....	Space: 84mm W x 119mm H x 29mm D (3.3" x 4.7" x 1.15") Duct: 145mm W x 100mm H x 63mm D (5.7" x 3.95" x 2.5") Duct Probe: 177mm (7") long x 25.4mm (1") diameter
Enclosure Ratings.....	Space: IP30 (NEMA 1) Duct: IP64 (NEMA 3R)

CO₂ Signal:

Measurement Type.....	CDD5A & B: Non-Dispersive Infrared (NDIR), diffusion sampling CDD5C & D: Dual Channel Non-Dispersive Infrared (NDIR), diffusion sampling
Measurement Range.....	CDD5A & B: 0 - 2000 ppm standard, programmable to 7500 ppm CDD5C & D: 0 - 20,000 ppm standard, programmable span from 2000 to 20,000 ppm
Standard Accuracy.....	CDD5A & B: ±30 PPM + 3% of reading with Auto Cal on CDD5C & D: ±75 PPM or 10% of reading (whichever is greater)
Temperature Dependence.....	0.2% FS per °C
Stability.....	CDD5A & B: < 2 % FS over life of sensor (15 years typical) CDD5C & D: < 5 % FS over life of sensor (15 years typical)
Pressure Dependence.....	0.13% of reading per mm Hg
Altitude Correction.....	Programmable from 0-5000 ft via keypad
Response Time.....	<2 minutes for 90% step change typical
Warm-up Time.....	<2 minutes

Temperature Signal:

Sensing Element.....	10K thermistor, ±0.2°C (±0.2 °C)
Range.....	0° to 35°C (32° to 95°F) or 0° to 50°C (32° to 122°F) selectable via keypad

RH Signal:

Sensing Element.....	Thermoset polymer based capacitive
Accuracy.....	± 2% RH
Range.....	0 - 100% RH, non-condensing
Hysteresis.....	± 3% RH
Response Time.....	15 seconds typical
Stability.....	± 1.2% RH typical @ 50% RH in 5 years

Optional Relay Output:

Contact Ratings.....	Form A contact (N.O.), 2 Amps @ 140 Vac, 2 Amps @ 30 Vdc
Relay Trip Point.....	CDD5A & B: Programmable 500-5000 ppm via keypad CDD5C & D: Programmable 500-15,000 ppm via keypad
Relay Hysteresis.....	CDD5A & B: Programmable 25-200 ppm via keypad CDD5C & D: Programmable 25-500 ppm via keypad

LCD Display:

Resolution.....	1 ppm CO ₂ , 1% RH, 1°C (1°F)
Size.....	1.4" w x 0.6" h (35 mm x 15 mm) alpha-numeric 2 line x 8 character
Backlight.....	Enable or disable via keypad

Optional Override Switch.....Front panel push-button available as two-wire dry-contact output

Optional Setpoint Control.....Front panel slidepot available as two-wire resistive output, 0-10 KΩ standard

CO₂, TEMPERATURE & HUMIDITY DETECTOR

FEATURES:

- Menu driven set-up
- 0-2000 or 0-20,000 ppm CO₂ ranges
- Patented self-calibration algorithm
- Guaranteed 5 year calibration interval
- Temperature & Humidity Outputs
- Easily field calibrated
- Accepts AC/DC power

OPTIONS:

- LCD
- Slidepot
- Override Switch
- Control relay
- Custom Logos

PRODUCT ORDERING INFORMATION:

MODEL	Description
CDD5A	Carbon Dioxide Detector - 0-2000 ppm, Temperature & Humidity sensor w/ 4-20 mA Output
CDD5B	Carbon Dioxide Detector - 0-2000 ppm, Temperature & Humidity sensor w/ 0-10 Vdc or 0-5 Vdc Output
CDD5C	Carbon Dioxide Detector - 0-20,000 ppm, Temperature & Humidity sensor w/ 4-20 mA Output
CDD5D	Carbon Dioxide Detector - 0-20,000 ppm, Temperature & Humidity sensor w/ 0-10 Vdc or 0-5 Vdc Output

CODE	Enclosure
10	Space
20	Duct

CODE	LCD Display
0	Concealed
1	Viewable

CODE	Setpoint Adjustment (Available on Space only)
-	No Setpoint Adjustment
P	Setpoint Adjustment

CODE	Momentary Override (Available on Space only)
-	No Override
S	Override Switch

CODE	Relay Output
-	No Relay
R	Relay

CDD5A	10	1	P	S	-	← Typical Model Number
--------------	-----------	----------	----------	----------	----------	------------------------

Example: Space CO₂ - 0-2000 ppm/RH/Temp w/ LCD, Setpoint Adjustment, Override Switch w/ 4-20mA Output

Greystone Energy Systems Inc. reserves the right to make design modifications without prior notice.



ACLP SOFTWARE

ACLP (Automatic Calibration Logic Program) software utilizes the computing power in the sensor's on-board microprocessor to remember the lowest CO₂ concentration that takes place every 24 hours. The sensor assumes this low point is at outside levels. The sensor is also smart enough to discount periodic elevated readings that might occur if for example a space was used 24 hours per day over a few days. Once the sensor has collected 14 days worth of low concentration points, it performs a statistical analysis to see if there has been any small changes in the sensor reading over background levels that could be attributable to sensor drift. If the analysis concludes there is drift, a small correction factor is made to the sensor calibration to adjust for this change.

5-YEAR CALIBRATION GUARANTEE

Based on the results of years of testing of ACLP software, Greystone now offers a 5-year calibration guarantee on all its CDD series wall and duct mount sensors used for CO₂ based ventilation control when operated in an environment that can utilize ACLP software. If the sensor is found to be out of calibration more than 150 PPM as compared to a calibration gas or recently calibrated reference, Greystone will provide a free factory calibration of the sensor if returned to Greystone. This guarantee only applies if the sensor is operated in an environment where inside levels periodically drop to outside concentrations (i.e. during evenings or weekends when there is no occupancy) as is required by ACLP software. If a space does not experience a periodic drop to outside levels (i.e. where occupancy is 24 hours, 7 days/week), ACLP software should be deactivated. With ACLP deactivated (via menu buttons), calibration may be required every 2 to 3 years.

DIMENSIONS:

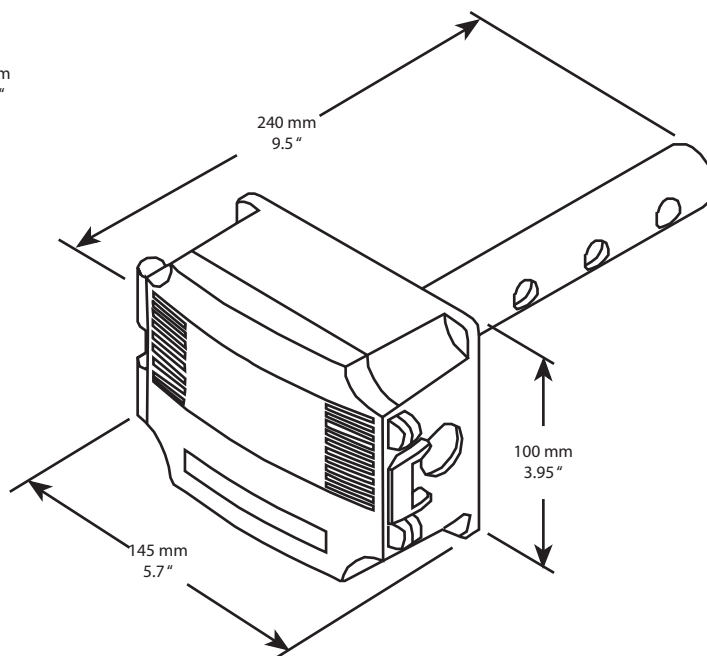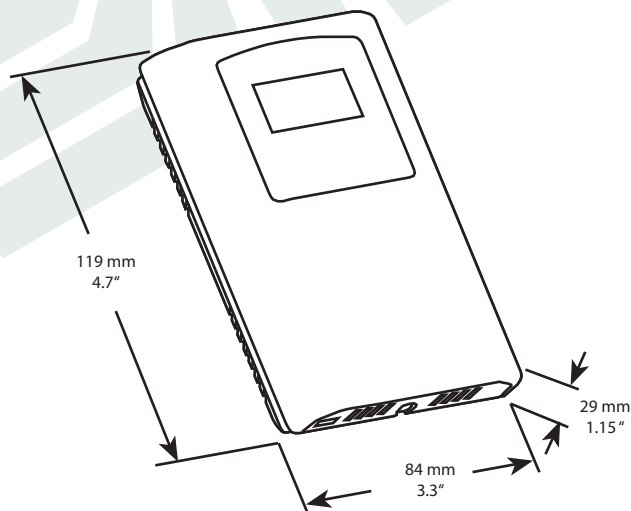

GREYSTONE
ENERGY SYSTEMS INC

Greystone Energy Systems Inc.
150 English Drive, Moncton, NB
Canada E1E 4G7

(506) 853-3057 Fax: (506) 853-6014
North America: 1-800-561-5611
e-mail: mail@greystoneenergy.com
web site: www.greystoneenergy.com

RoHS
COMPLIANT



Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC sensors and transducers for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.

GREYSTONE HAS AN **ISO 9001** REGISTERED QUALITY SYSTEM