

# Gas Platform for Gas Sensors

## GWN Series



GWN



### SPECIFICATIONS

<b>Input Power</b>	15-30VDC/24VAC ±20%, Class 2; 50/60 Hz
<b>Relay Ratings</b>	1A/30VAC/DC, Normally Open
<b>Operating Temperature Range</b>	-20° to 50°C (-4° to 122°F)
<b>Operating Humidity Range</b>	0-90% RH noncondensing
<b>Terminal Block Wire Size</b>	30-12 AWG
<b>Terminal Block Torque</b>	0.5-0.6 N-m (0.37-0.44 ft-lb)
<b>Protection Class</b>	IP20

The GWN operates only when an AG Series gas sensor is installed (sold separately). Accuracy, sensitivity, setpoints, and measurement range are dependant on the AG Series sensor connected to the GWN platform. See the AGxx sensor installation guide for details.

\* The AGxx gas sensors are warranted for two years from the date of manufacture. The AGxx sensors are not a part of the 5-year GWN warranty.

## Easily Swap the Sensing Element at Any Time Without Costly Labor

### FEATURES

- Modular platform that accepts either the AG01 CO sensor or the AG02 NO<sub>2</sub> sensor (sold separately)...no need to install a new GWN when the sensor life wears out
- Three colored LEDs (red, yellow, green)...easy status viewing
- Microprocessor controlled...excellent stability
- No calibration required...easy maintenance and worry-free operation
- Interface to DDC system or direct fan control...easy integration with existing systems
- Interface to control system via 4-20mA with relay, 0-5/0-10VDC with relay, or relay only options...application flexibility
- Relay outputs provide low, high, and sensor end-of-life signals for multi-stage fan actuation and service indication

### DESCRIPTION


**GWN Series** gas platform offers a convenient means for sensing gases in the environment. The GWN is mounted to any single-gang electrical box and wired to the building controller. Then, a single AGxx gas sensor (sold separately) is installed in the GW. With this design, there is no need for a costly new installation when a sensor reaches the end of its life. The GWN platform remains installed, and the installer simply opens the GWN housing to replace the modular sensor inside, reducing labor costs and downtime.

AG sensors for CO and NO<sub>2</sub> are available, and the sensor can be swapped in the GW platform at any time with minimal effort. The GWN platform converts the signal from the AG sensor into an analog or relay signal compatible with building control systems.

### APPLICATIONS


- Controlling parking garage ventilation
- Ensuring OSHA air quality compliance in commercial buildings and factories
- Vehicle bays (ambulance/fire/taxi stations)
- Mechanical rooms
- Sally ports

**WIRING DIAGRAMS**

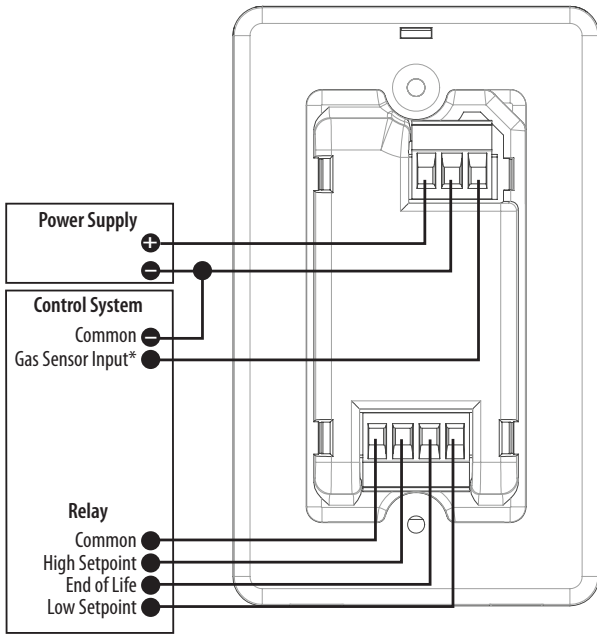

\* Not available on relay only models.

**DIMENSIONAL DRAWINGS**

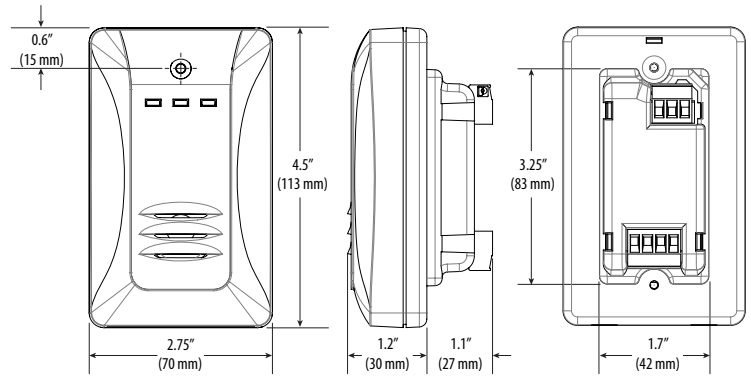

**ORDERING INFORMATION**

**Output**

GWN

V = Field-selectable, 0-5/0-10VDC with relay  
M = 4-20mA with relay  
1 = Relay only

*Example:*

GWN

**ORDERING INFORMATION - SENSORS**

The GWN will not operate without an AGxx sensor installed. Sensors are sold separately.

MODEL	DESCRIPTION
AG01	CO Sensor. CO sources include automobile exhaust from gasoline engines, gasoline powered furnaces, gasoline powered water heaters, gasoline generators
AG02	NO <sub>2</sub> Sensor. NO <sub>2</sub> sources include automobile exhaust from diesel engines and diesel powered generators



AG01 CO Sensor



AG02 NO<sub>2</sub> Sensor

<b>Sensor Type</b>	Electrochemical
<b>Measurement Range</b>	0-200 ppm
<b>Accuracy</b>	±5% of range
<b>Resolution</b>	1 ppm
<b>Sensor Warranty</b>	2 years from manufacture date
<b>Low Setpoint Value</b>	25 or 35 ppm (switch selectable)
<b>High Setpoint Value</b>	180 ppm (fixed)
<b>Operating Temperature Range</b>	-20° to 50°C (-4° to 122°F)
<b>Operating Humidity Range</b>	0-90% RH noncondensing

<b>Sensor Type</b>	Electrochemical
<b>Measurement Range</b>	0-10 ppm
<b>Accuracy</b>	±5% of range
<b>Resolution</b>	0.1 ppm
<b>Sensor Warranty</b>	2 years from manufacture date
<b>Low Setpoint Value</b>	1 ppm (fixed)
<b>High Setpoint Value</b>	3 ppm (fixed)
<b>Operating Temperature Range</b>	-20° to 50°C (-4° to 122°F)
<b>Operating Humidity Range</b>	0-90% RH noncondensing