



# RedMax ¼ turn actuators ...Y-A

Electrical, explosion proof rotary actuators size M

24...240 VAC/DC, 95° angle of rotation incl. 5° pretention, 4-20 mA / 0-10 V control and feedback  
450/675 in-lbs & 900 in-lbs without and 270 in-lbs & 450 in-lbs with safety operation (spring return)  
tested in acc. with Canadian and United States hazardous location standards for  
Class I, II, III Division 2, Groups ABCDEFG and zone 2, 22.

RedMax - 450.675-Y-A  
RedMax - 900-Y-A  
RedMax - 900-Y-A  
RedMax - 270-YF-A  
RedMax - 450-YF-A  
RedMax-...-U/UF-A  
RedMax - ... - CTM


Subject to change!

**Compact. Easy installation. Universal. Cost effective. Safe.**

Type	Torque	Supply	Motor running time	Spring return	Control mode	Feedback	Wiring diagram
RedMax-450.675-Y-A	450/675 in-lbs, 50/75 Nm	24...240 VAC/DC	40/60/90/120 s/90°	without	0..10 VDC, 4..20 mA	0..10 VDC, 4..20 mA	SB 4.0
RedMax-900-Y-A	900 in-lbs, 100 Nm	24...240 VAC/DC	40/60/90/120 s/90°	without	0..10 VDC, 4..20 mA	0..10 VDC, 4..20 mA	SB 4.0
RedMax-270-YF-A	270 in-lbs, 30 Nm	24...240 VAC/DC	40/60/90/120 s/90°	~ 20 sec. at 90°	0..10 VDC, 4..20 mA	0..10 VDC, 4..20 mA	SB 5.0
RedMax-450-YF-A	450 in-lbs, 50 Nm	24...240 VAC/DC	40/60/90/120 s/90°	~ 20 sec. at 90°	0..10 VDC, 4..20 mA	0..10 VDC, 4..20 mA	SB 5.0
RedMax-...-U-A	Type as above but 3 pos. control and analog output			without	on/off, 3 pos.	0..10 VDC, 4..20 mA	SB 6.0
RedMax-...-UF-A	Type as above but 3 pos. control with spring return and analog output			~ 20 sec. at 90°	on/off, 3 pos.	0..10 VDC, 4..20 mA	SB 7.0
RedMax- ... - CTM	Type as above but with Al housing and marine „amercoat“ painting (0,63" x 0,63" (16 x 16) mm shaft connection, cable glands and hollow rivet Ms-Ni)						

## Application

Damper



Damper



Ball valve



Throttle valve



## Description

The new RedMax actuators are a revolution for safety, control and shut-off dampers, VAV systems, ball valves, throttle valves and other motorized applications for HVAC systems, in chemical, pharmaceutical, industrial and Offshore-/Onshore plants, for use in hazardous areas class I,II,III division 2 (NEC500) and zone 2 (gas) and zone 22 (dust) (NEC505). Highest protection class and NEMA4X, IP 66 protection, small dimensions, little weight, universal functions and technical data, an integrated heater guarantee safe operation even under difficult environmental conditions. High quality brushless motors guarantee long life.

All actuators are programmable and adjustable on site (Accessory "Stick" is required). 4 motor running times and 2 torques, according to the actuator type, are selectable or adjustable on site. The integrated universal power supply is self adaptable to input voltages in the range of 24...240 VAC/DC. The actuators are 100% overload protected.

**RedMax-...-F-A** actuators are equipped with spring return fail safe function. Standard shaft connection is a double squared direct coupling with 0,63" x 0,63" / 16 x 16 mm.

Different accessories are available to adapt round/squared shafts with different sizes, conduit boxes or adaptations for ball valves and throttle valves.

## Highlights

- For all types of gases and dusts for use in division 2 and zone 2, 22 areas
- Universal supply unit from 24...240 VAC/DC
- 4 motor running times (40-60-90-120 sec./90°), adjustable with stick on site
- Spring return running time 20 sec./90°
- 4..20 mA / 0..10 V control mode with or without spring return function
- 270/450/675/900 in-lbs (30/50/75/100) Nm actuators in the same size (M)
- 100 % overload protected
- Compact design and small dimension (11.26x5.91x4.57)" (286x150x116) mm
- Direct coupling to the damper shaft with □ 0,63" x 0,63" / 16 x 16 mm
- 95° Angle of rotation incl. 5° pre-tention
- Robust aluminium housing (optional amercoat painting)
- NEMA4X, IP66 protection
- Simple manual override include + preparation for comfortable manual override
- Gear made of stainless steel and sinter metal
- Only 21 lbs (9,5 kg) weight
- Integral heater for ambient temperatures down to -40°F, -40°C
- Integral safety temperature sensor
- Integral equipment for manual adjustment (push button, lamp, external stick)
- Range of accessories



RedMax-...-Y-A

RedMax-...-YF-A

RedMax-...-U-A

RedMax-...-UF-A

**SCHISCHEK**  
EXPLOSION PROOF

Special makes

RedMax-...-CTM

Technical data	RedMax-450.675-Y-A	RedMax-900-Y-A	RedMax-270-YF-A	RedMax-450-YF-A
Torque motor	450/675 in-lbs, 50/75 Nm selectable	900 in-lbs, 100 Nm	270 in-lbs, 30 Nm	450 in-lbs, 50 Nm
Torque spring return (F)	without spring (F)	without spring (F)	min. 270 in-lbs, 30 Nm	min. 450 in-lbs, 50 Nm
Dimension of external torque	above mentioned torques are min. torques, external load should be max. 80 % of max. actuator torque but min. 45 in-lbs / 5 Nm			
Supply voltage/Frequency	24...240 VAC/DC, +/- 10 %, self adaptable, Frequency 50...60 Hz +/- 20 %,			
Power supply rating	Inrush current 2 A max. 1 sec. nominal currents see table (I <sub>start</sub> >> I <sub>rated</sub> ),			
Power consumption	see table extra info EL depends on voltage and adjusted running time max. 30 W resp. 50 VA, in blocking position max. 10 W			
Power consumption heater	approx. 16 W, heater starts at temperature lower -4 °F/-20 °C			
Protection class	class I (grounded)			
Angle of rotation and indication	95°, incl. ~ 5° pre-tention, mechanical value indication			
Working direction	selectable by left/right mounting to the damper/valve shaft			
Motor running time	90 sec. at 90° (adjustable running times are 40 / 60 / 120 sec. at 90° with accessory stick on site)			
Motor	brushless DC Motor			
Spring return (F)	without F	without F	spring return in the event of loss of power	
Spring return running time (F)	without F	without F	spring return ~20 sec. at 90°	
Lifetime	min. 10.000 cycles in acc. with construction of damper and environmental conditions.			
Response time spring return	up to 1 sec. after power failure			
Control mode	0..10 VDC, 4...20 mA in acc. with wiring, selectable on site, Version -U or UF 3 position control			
Feedback signal U	0..10 VDC, 4...20 mA in acc. with wiring, selectable on site			
Resistance of Y and U signals	Input signal Yu 0...10 VDC @ 10 kΩ, Yi 4...20 mA @ 100 Ω. Feedback signal Uu 0...10 VDC @ 1.000...∞ Ω, Ui 4...20 mA @ 0..800 Ω			
Reverse function	a reverse function of Y and U can be selected with accessory stick			
Adjustment of Y and U	If the angel of rotation is different to 90° the input Y and output signal U can be adjusted to the new angel of rotation			
Axle of the actuator	double squared 0,63" × 0,63", 16 × 16 mm, direct coupling, 100 % overload protected			
Electrical connection	cable ~ 39,4", (1 m), diameter of wires 20 AWG (0,5 mm²), for connection inside hazardous areas an approved junction box is required!			
	connect an additional protection earth with min 18 AWG			
Diameter of cable	~ Ø 0,29", 8 mm			
Conduit connection	1/2" NPT, standard cable- and wire entries are integral part of explosions proof encapsulation, conduit seal not required			
Manual override	Manual override only if supply voltage is cut, use delivered sallén key, slow motion, enough torque/force is required			
	<b>Attention:</b> with manual operation of actuators with spring return danger of injury exists, with release/let go the allen key.			
Integral heater	integral heater, controlled, for ambient temperature down to - 40°F / -40 °C			
Housing material	Aluminium die cast housing, painted (optional in <b>marine</b> „amercoat“ painting type ...-CTM)			
Dimensions	L × W × H = 11.26" × 5.91" × 4.57"; (286 × 150 × 116) mm, for diagramm see extra information „ME“			
Weight	~ 21 lbs / 9,5 kg Aluminium housing			
Ambient temperature	working temperature - 40...+ 104°F / -40...+40°C at T6 and - 40...+ 122°F / -40 ...+50°C at T5			
H umidity	0..90 %RH non condensing			
Storage temperature	- 40...+ 158°F / -40...+70°C,			
Environment conditions	for outdoor installation a protective housing against rain, snow, sun should be applied, altitude up to 2000 m, pollution degree 2			
Operation mode	S3 - 50% ED (ED = duty cycle) intermittent mode, note also page 4 section E.			
Self adjustment	if you select 40 or 60 sec. mode for motor or angle of rotation is < 90° start the self adjustment mode (press push button 3 sec.)			
Maintenance	maintenance free, maintenance must be complied with regional standards, rules and regulations			
Cleaning	Dirt and dust deposition should be avoided, for cleaning use wet cloth			
Wiring diagrams (SB)	SB 4.0	SB 4.0	SB 5.0	SB 5.0
Delivery	1 actuator, 1 m cable, double squared shaft connection 16 × 16 mm, 4 screws, 4 nuts, allen key for simple manual override			
	Parameters of actuator are preadjusted see "Parameter at delivery". The paramters can be changed by an optional accessory stick.			
Parameter at delivery	450 in-lbs, 50 Nm 90 sec	900 in-lbs, 100 Nm 90 sec	270 in-lbs, 30 Nm 90 sec.	450 in-lbs, 50 Nm 90s

Certifications	RedMax actuators
CSA certified	CSA Certificate 2236405
Approval for divisions	NI Class I, II, III, Div. 2 Gr. ABCDEFG
Approval for zones	NI Class I, Zone 2, AEx nC IIC
Approval elec. safety	CSA 1010-1
UL certified	QUYX E340805
Approval elec. safety	UL 61010-1
EMC	2004/108/EC
Low voltage	2006/95/EC overvoltage cat II,
NEMA / IP-Protection	NEMA4X / TYPE4X / IP66

Accessories or special solutions	
Stick	for set (adjust) different actuator functions (motor running time, torque)
...-CTM	above listed types in Al-housing with amercoat painting, parts Ms-Ni
RedBox-...	junction boxes for haz. locations acc. NEC505 (ATEX only)
MKK-M	mounting bracket for junction boxes direct on actuator
KB-M1-A	clutch for damper shafts Ø 0,39" ...0,79" and □ 0,39" ...0,63"
KB-M2-A	clutch for damper shafts Ø 0,39" ...0,79" and □ 0,39" ...0,63"
HV-M	comfortable manual override for actuators size M
Adaptations	various adaptations for dampers/valves on request



RedMax-...-Y-A

RedMax-...-YF-A

RedMax-...-U-A

RedMax-...-UF-A

**SCHISCHEK**  
EXPLOSION PROOF

Special makes

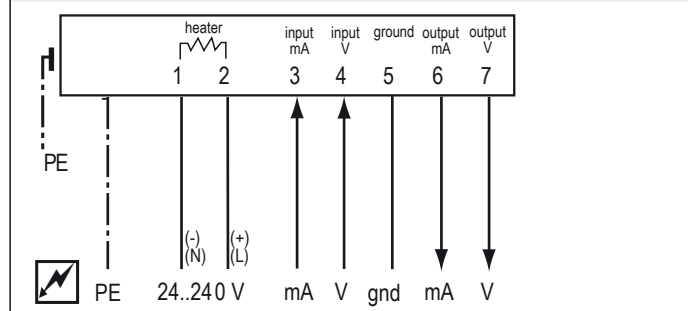
RedMax-...-CTM

**Electrical connection**

RedMax actuators are equipped with a universal supply unit working at a voltage range from 24 ... 240 VAC/DC. The supply unit is self adjustable to the connected voltage! Device is fuse protected with 5 AT (not replaceable). Note the inrush current is approx. 2 A for max. 1 sec. For electrical connection inside hazardous locations an explosion proof junction box is required. For permanently connected equipment is an external 2 A (time lag) circuit-breaker in the control cabinet required. This should be in close proximity to the equipment and within easy reach of the operator. It should be marked as the disconnecting device for the equipment. Approved fuse according IEC 60127-2 and/or UL 248-14 and min. breaking capacity 1500 A for AC and/or DC supply voltage should be used.

**Wiring diagram RedMax-...-Y-A (without spring)**

SB 4.0

**Parameter, Adjustment – Failure indication**

Push button – Lamp for adjustment

3-colour LED

Connection of stick

Push button

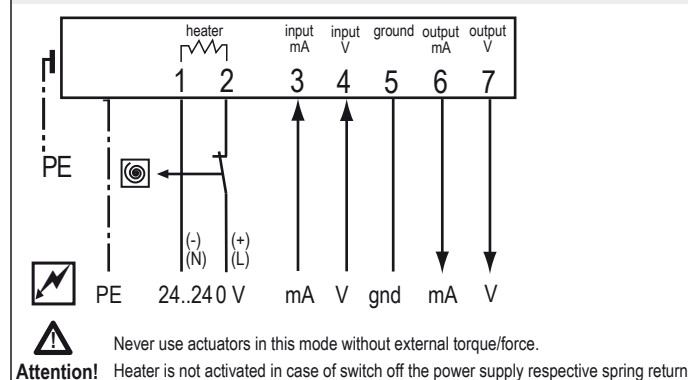


PE = protection earth connection

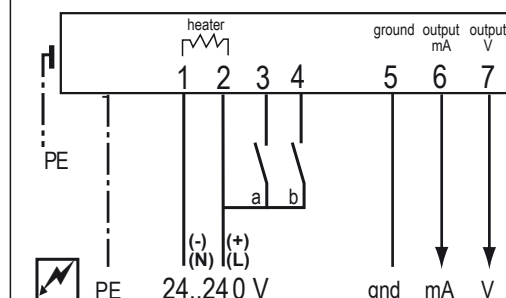
1/2" conduit connection

**Wiring diagram RedMax-...-YF-A (with spring)**

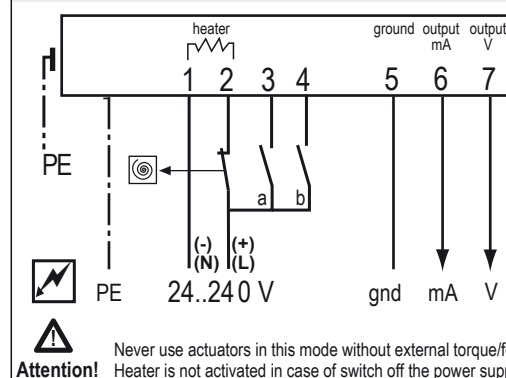
SB 5.0

**Wiring diagram RedMax-...-U-A (without spring)**

SB 6.0

**Wiring diagram RedMax-...-UF-A (with spring)**

SB 7.0

**Function, adjustment and parameter****A) Self adjustment of Angle of rotation for fast running time and angle < 90°:**

Push the button (T) for minimum 3 seconds. The actuator will drive into both end positions to be adjusted. LED indicates blinking green.

Adjustment time needs approx. 180 sec. (90 sec. open, 90 sec. close).

**B) Additional information for 3-pos operation:**

a closed, b open = direction I

b closed, a open = direction II

a and b closed = Motor doesn't work

a and b opened = Motor doesn't work

Direction (I and II) depends on left/right mounting of the actuator to the damper/valve.

You can change direction of the motor by changing electrical wiring terminal 3 and 4.

**C) Selection of running time and torque:**

Adjustment can be done with supply voltage only.

Settings only if actuator is not running.

Set DIP switch „accessory switch“ into the correct position

Push the button more than 1 sec and less than 3 sec. LED is orange and after data transfer blinking red-green. If LED is red blinking only there was an error.

**Error indication**

See extra information „EL“

**Parameter selection with accessory "Stick"**

Position of switch S			
Write protection	ON	OFF	off
Blank	no function		
Force control	no function		
Invers	ON	on	OFF off
Torque	ON	high	OFF low
SW 2 SW 3			
Running time	OFF	OFF	40 sec.
Running time	ON	OFF	60 sec.
Running time	OFF	ON	90 sec.
Running time	ON	ON	120 sec.
Spring Return	no function		





RedMax-...-Y-A

RedMax-...-YF-A

RedMax-...-U-A

RedMax-...-UF-A

**SCHISCHEK**  
EXPLOSION PROOF

Special makes

RedMax-...-CTM

**Mounting instructions and important information for operation and installation****Important information for installation and operation****A. Installation, commissioning, maintenance**

Wiring must be in accordance with local codes and regulations. In acc. with operation all actuators are maintenance free. Nevertheless maintenance must comply with regional standards, rules and regulations. The flameproof enclosure is protected against mechanical shock by the housing of the actuator. The actuators must not be opened by the customer. For outdoor installation a protective housing against rain, snow and sun should be applied to the actuator, as well as a constant supply at terminal 1 and 2 for the integral heater. For electrical connection inside hazardous locations a junction box is requested.

Attention: If the actuator is put out of operation all national regulation must be applied. For hazardous location installation regard the control drawing.

**B. Shaft connection, selection of running time, heater**

All actuators are equipped with a direct coupling double squared shaft connection of 0.63" x 0.63", (16 x 16) mm. For round shafts an adaptor is available (Accessory type KB-M-A).

The housing of the actuator is axially symmetrically built to select open/close direction of the spring return function by left/right mounting.

In acc. to the actuator type 4 different motor running times and 2 different spring return running times can be selected on site.

**C. Spring return**

Spring return function works if the supply voltage (terminal 1 or 2) is cut. In the event of an electrical interruption, the spring returns to its end position.

**D. Operation at an ambient temperature below -40°F / -40°C**

See extra information „EL“. The integral heater is for ambient temperatures down to -40°F / -40 °C.

**E. Excess temperature and Operation mode**

Actuators are protected against excess temperature. An internal thermostat guarantees the temperature class in the event of failure. If this thermostat is working the actuator must be sent to the factory. The actuators are equipped with an additional temperature sensor to stop the actuator before reaching this max. temperature. In this case the failure must be eliminated immediately on site. The actuator works with intermitted operation mode S3 50%. This restriction is valid for full load (30 W) applications. Means. 5 min working, 5 min cooling. Otherwise the internal thermostat switch off the motor.

**F. Synchron mode**

Do not connect several actuators to one shaft or link mechanically together.

**Mounting on air dampers with double squared shaft connection**

Details see extra information „ME“.

**Mounting on air dampers with clutch**

Details see extra information „ME“.

**Mounting of quarter turn valves**

Details see extra information „ME“.

**Installation**

Hazardous (classified) locations  
Zone 2  
Division 2, Class I,II,III



safe area



Option (-Y/YF) \*  
input mA/V 4-20 mA / 0-10 V  
output mA/V 4-20 mA / 0-10 V  
Option (-U/UF) \*  
input on/off, 3 pos  
output mA/V 4-20 mA / 0-10 V

Supply \*  
24...240 VAC/DC ± 10%

\* electrical connection see wiring diagram

- Certified apparatus must be installed in accordance with manufacturer instructions.
- If the equipment is used in a manner not specified by the manufacturer, the safety protection provided by the equipment may be impaired.
- Installation and maintenance must comply with regional standards, rules and regulations.
- Install per Canadian Electrical Code (CEC).
- Install per National Electrical Code (NEC).
- Do not open covers when circuits alive
- The cable must be installed in a fixed position and protected against mechanical and thermal damage. Damaged cords must be replaced by manufacturer.
- Connect protection earth with min. 18 AWG wire size.
- Avoid thermal transfer from ducts, pipes, ... to actuator (ensure max. ambient temp!)
- Ambient temperature -40...+104 °F / -40...+40 °C @ T6
- Close after settings all covers and entries tight min. NEMA4X/IP66.
- For outdoor installation a protective housing against rain, snow, sun should be applied
- For electrical connection use an approved conduit box, junction box.
- All Conduits must be assembled with a minimum of five full threads engagement.
- Use supply wires suitable for 5°C above surroundings.
- For Class I seal - device is factory sealed conduit seal is not required

**Extra information „EL“ (see additional data sheet)**

extra technical information, power supply ratings and failure indication

**Extra information „ME“ (see additional data sheet)**

extra technical information, dimensions, installation instruction and illustration

D.RM-02.02-M-en-Y-A(NA)  
2-Mar-2012