



GREYSTONE

ENERGY SYSTEMS INC

ROOM HUMIDITY TRANSDUCER RH100B Series

The RH100B series uses a highly accurate and reliable Thermoset Polymer based capacitance humidity sensor and state-of-the-art digital linearization and temperature compensated circuitry in an attractive, low profile enclosure to monitor room humidity levels.

An optional temperature sensor is available.

SPECIFICATION:

Sensor Type:.....Thermoset Polymer based capacitive
 Accuracy at 25°C:.....±2, 3, or 5% RH, (5% to 95% RH)
 Measurement Range:.....0 to 100% RH
 Temperature Dependence:..±0.05% RH/ °C
 Hysteresis:.....±1.5% RH maximum
 Repeatability:.....±0.5% RH typical
 Linearity:.....±0.5% RH typical
 Sensor Response Time:.....15 seconds typical
 Stability:.....±1% RH typical at 50% RH in 5 yrs.
 Operating Temperature:.....0° to 50°C (32° to 122°F)
 Operating Humidity:.....0 to 95% RH non-condensing
 Power Supply:.....18 to 35 Vdc, 15 to 26 Vac
 Consumption:.....22 mA maximum
 Input Voltage Effect:.....Negligible over specified operating range
 Protection Circuitry:.....Reverse voltage protected and output limited
 Output Signal:.....4-20 mA current loop, 0-1, 0-5 or 0-10 Vdc (jumper-selectable)
 Output Drive at 24 Vdc:.....550 Ω max for current output 10K Ω min for voltage output
 Internal Adjustments:.....Clearly marked ZERO and SPAN pots
 Wiring Connections:.....Screw terminal block (14 to 22 AWG)
 Optional Temp. Sensor:.....Various RTDs and thermistors available as two-wire resistance output (See Ordering Chart)
 Enclosure:.....White ABS, IP20 (Nema 1)
 Dimensions:.....70x114x30mm, (2.75" w x 4.5" h x 1.2" d)



PART NUMBER SELECTED

PRODUCT SELECTION INFORMATION:

MODEL	Product Description
RH100B	Room Designer Humidity Transducer

CODE	Accuracy
02	2%
03	3%
05	5%

CODE	Optional Temperature Sensor
L	100Ω Platinum, IEC 751, 385 Alpha, thin film
C	1000Ω Platinum, IEC 751, 385 Alpha, thin film
F	1801Ω, NTC Thermistor, ±0.2°C
E	3,000Ω, NTC Thermistor, ±0.2°C
D	10,000Ω, type 3, NTC Thermistor, ±0.2°C
J	10,000Ω, type 2, NTC Thermistor, ±0.2°C
K	20,000Ω, NTC Thermistor, ±0.2°C
M	1000 Ω Nickel, Class B, DIN 43760
B	10k Ω Type 3, NTC Therm, ±0.2 C c/w 11K shunt Resistor
G	2.252KΩ Thermistor, ±0.2 C

RH100B 03 D


Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

TYPICAL INSTALLATION:

For complete installation and wiring details, please refer to the product installation instructions.

The SS plate type sensor installs directly on a standard electrical box and should be mounted five feet from the floor of the area to be controlled. Do not mount the sensor near doors, opening windows, supply air diffusers or other known air disturbances. Avoid areas where the sensor is exposed to vibrations or rapid temperature changes.

A terminal is provided for connection to the Building Automation System.

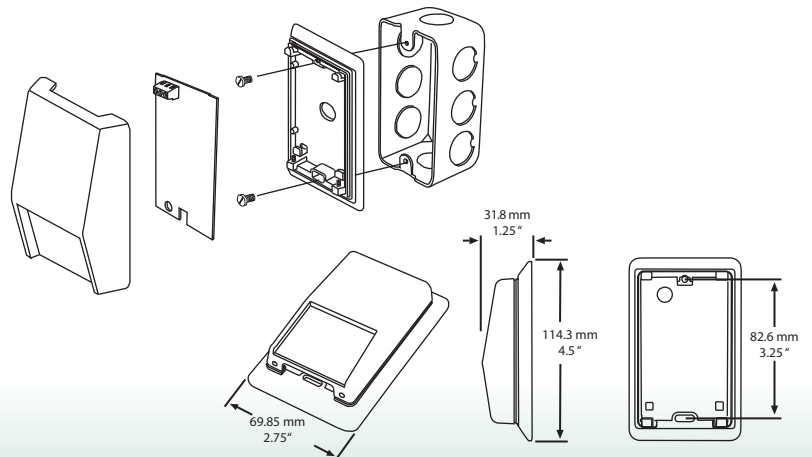

Greystone Energy Systems, Inc. (506) 853-3057 Fax: (506) 853-6014
 150 English Drive, Moncton, NB North America: 1-800-561-5611
 Canada E1E 4G7 e-mail: mail@greystoneenergy.com
 www.greystoneenergy.com

RoHS
COMPLIANT

