

# LIGHTING CONTROLS

## MARKTIME FAN LIGHT TIME SWITCH 42000 SERIES



**MARKTIME**  
Brand of Energy Saving Products

### DESCRIPTION

The Marktime 42000 Series in-wall timers are perfect for automatic shut-off control of ventilation in high humidity areas, bath fans and whole house fans. For high humidity areas; switch turns ON a light and fan simultaneously. Turn light OFF, fan remains ON for a preset time.

### FEATURES

- Control of fan/light with one switch
- Solid state components for long life
- Single or multi-ganged installation
- 1 to 60 minute time delay setting
- Two position switch: On/Timed Off
- Three position switch: On/Off and Timed Off
- White or Ivory available
- Standard wall box mount
- Package includes installation hardware
- Wall Plate not included



42513



42702-1

(Shown with wall plate, not included)




SPECIFICATIONS	
<b>Supply Voltage</b>	120 VAC, 60 Hz
<b>Operation</b>	Push Button or lever to desired time On activation the contacts transfer from normal
<b>Relay Output Configuration</b>	SPST-N.O.
<b>Contact Current</b>	
<b>Model 425</b>	1/3 HP; 500W Incandescent (Do not use with fluorescent lamp ballasts or CFLs)
<b>Model 427</b>	1/6 HP; 500 watts incandescent/tungsten; 200VA fluorescent ballasts
<b>Indicators</b>	Model 427, 2-LEDs, ON/OFF/Time
<b>Timers</b>	Timer or ON/OFF
<b>Model 4250</b>	3 positions, ON/OFF/Timer-1 to 60 minutes adjustable
<b>Model 4251</b>	2 positions, OFF/Timer-1 to 60 minutes adjustable
<b>Model 427</b>	2 button, ON/OFF/Timer-20, 40, 60 minutes
<b>Operating Temperature</b>	-32° to 104°F ( 0° to 40°C)
<b>Operating Humidity</b>	20% to 85% Non-condensing
<b>Wiring Terminations</b>	5-pig tail 6" wires, 14 AWG
<b>Mounting</b>	Vertical, Switch plate not included
<b>Color</b>	Ivory and White per order
<b>Enclosure Rating</b>	ABS, UL94 5V-A, UL94V0
<b>Dimensions</b>	
42503/42507	4.12"H x 1.75"W x 1.5"D (10.5 x 4.5 x 3.8)
42513/42517	4"H X 1.75"W X 1.5"D (10.2 x 4.5 x 3.8)
42702-1	4.12"H x 1.75"W x 2"D (10.5 x 4.5 x 5.0)
<b>Weight</b>	0.4 lb (0.181Kg)
<b>Approvals</b>	UL, cUL
<b>Warranty</b>	1 year


### WIRING

#### 42513

##### I. Standard Fan/Light Application



##### II. Single Timed Load Application

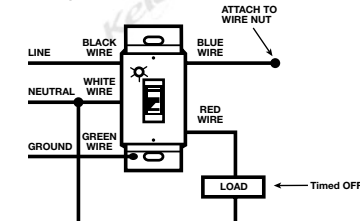

### ORDERING INFORMATION

Model	Maximum Time Setting	Mode of Activation	Mounting Style	Switch Configuration	Contact Position	Power	Approvals	Color	Plate (not included)
42503	60 mins.	3 Position Toggle	Wall Box	2 SPST	OFF	1/3 hp 500 Watts	cUL, UL	Ivory	Toggle
42507	60 mins.	3 Position Toggle	Wall Box	2 SPST	OFF	1/3 hp 500 Watts	cUL, UL	White	Toggle
42513	60 mins.	2 Position Toggle	Wall Box	2 SPST	OFF	1/3 hp 500 Watts	cUL, UL	Ivory	Toggle
42517	60 mins.	2 Position Toggle	Wall Box	2 SPST	OFF	1/3 hp 500 Watts	cUL, UL	White	Toggle
42702-1	20 mins. 40 mins. 60 mins.	Push Button Decora	Wall Box	2 SPST	OFF	1/6 hp 500 Watts	cUL, UL	Ivory White	Decora