



LIGHTING CONTROLS

LIGHTING OVERRIDE SWITCHES

CLLV-SW

DESCRIPTION

The CLLV-SW lighting override switch is a low voltage input into a lighting control panel. Each button registers a solid, audible click when pushed.

FEATURES

- Switch fits a single gang electrical box
- Includes white wall plate
- One or two button
- Digital input

SPECIFICATIONS

Contact Rating	24 VDC
Contact Type	Momentary (digital input only)
Life Rating	1,000,000 mechanical operations
Operating Temperature	14° to 160°F (-10° to 71.1°C)
Operating Humidity	20%-95% RH, non-condensing
Color	White
Dimensions	4.1" (10.3 cm) H x 1.5" (3.8 cm) W x 1.0" (2.5 cm) D
Materials of Construction	Plastic
Weight	0.06 lbs (0.03 kg)
Warranty	2 year

NEW!




CLLV-SW1



CLLV-SW2



WIRING

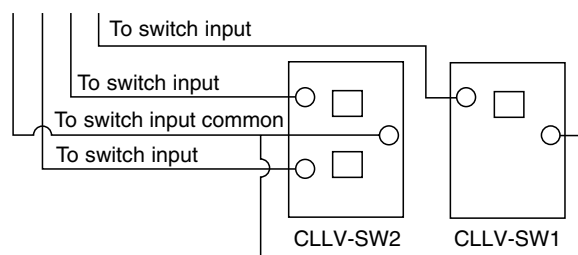

ORDERING INFORMATION

MODEL	DESCRIPTION
CLLV-SW1-P	One button, low voltage momentary switch
CLLV-SW2-P	Two button, low voltage momentary switch

12

LIGHTING CONTROLS

KEY OVERRIDE SWITCH

KPSW-K

DESCRIPTION


The KPSW-K switch allows key operation of lighting controls.

FEATURES

- Tamper-resistant face plate
- Two Keys included
- Screw chuck included
- One year warranty



KPSW-K

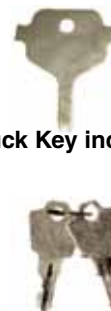

Chuck Key included

Two Keys included



SPECIFICATIONS

Contact Rating	120 VAC, 20 Amp
Contact Type	SPDT Maintained
Materials of Construction	Stainless steel
Warranty	One year

ORDERING INFORMATION

MODEL	DESCRIPTION
KPSW-K	One Key switch, removable key, stainless steel, maintained contact

ACCESSORIES	
2KL	Replacement keys (two per set)

NEW!