



LIGHTING CONTROLS

SPRINGWOUND AUTO-OFF TIMERS FD DECORATOR SERIES

DESCRIPTION

The Intermatic FD Decorator Series springwound auto-off timers are designed to replace any standard wall switch - single or multi-gang. This series of energy-efficient mechanical timers do not require electricity to operate. In addition, they automatically limit the ON times for fans, lighting, motors, heaters, and other energy consuming loads.

FEATURES

- Hold "on" feature disables the automatic shut-off timer
- Supplied time dial plates
- Single or multi-gang with no field modifications required
- Time saving up front terminal connection
- Press-on knob design
- CFL, incandescent, and motor compatible





FD30MWC



SPECIFICATIONS

Supply Voltage	125/277VAC, 50/60Hz. Not Required to operate	Timers Available	15 minute stocked
Operation	Spring return count down timer Manually Twist past mark time On activation the contacts transfer from normal	FDxM	0-(5,15, 30, 60) minutes or
Contact Output	SPST, 1-N.O., SPDT or DPST (2-N.O.) stocked special order	FDxH	0-(2, 4, 6, 12) hours
Contact Current		Operating Temperature	-40°F to 104°F (-40°C to 40°C)
Resistive	20A @ 125 VAC, 10A @ 277VAC	Operating Humidity	5% to 95% Non-condensing
Ballast	Do not use with Ballasts	Wiring Terminations	Terminals, 12 AWG max
Tungsten	7A Tungsten @ 125 VAC, (Compatible with CFL)	Mounting	Vertical Decorator, Single gang 2.5" deep switch box (not included)
FAN	1 Hp @ 125 VAC, 2 Hp @ 240 VAC	Color	Plastic plate in Ivory or White
Manual Override	Hold on some models	Enclosure Rating	NEMA 1
Special Functions	Decorator and full plastic faceplate	Dimensions	1.6"W x 2.7"H x 1.2"D (4.0 x 7.1 x 3.0 cm)
H model	HOLD closed in the "ON" position	Weight	Knob 0.75" from faceplate
		Approvals	0.4 lb. (0.18 Kg)
		Warranty	1 year

WIRING

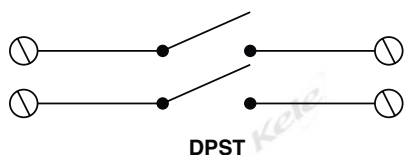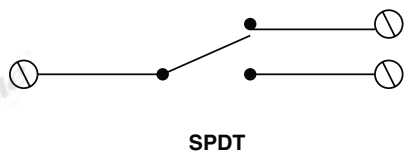

ORDERING INFORMATION

MODEL	DESCRIPTION
FD15MC	15 minute, SPST, ivory
FD15MWC	15 minute, SPST, white
FD15MH	15 minute with hold, SPST, ivory
FD15MHW	15 minute with hold, SPST, white