

# NETWORK & WIRELESS

## ENOCEAN RECEIVER CONTROLLERS EASYSENS SRC RECEIVER CONTROLLERS

### DESCRIPTION

The EasySens SRC Receiver Controller is a simple wireless solution for room climate control. There are several model options for heating and cooling control and analog outputs for variety of applications.

### FEATURES

- EnOcean Wireless Technology
- Easy to Setup with "Prog" and "Learn" buttons
- Model with Dimmer Capability Available

NEW!

**thermokon**  
Sensortechnik GmbH



SRC-DO2




### SPECIFICATIONS

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| <b>Supply Voltage</b>                 | 24 VAC/VDC                        |
| <b>Power Consumption</b>              |                                   |
| SRC-DO2-24V-1                         | 1.5 watts                         |
| SRC-AO-x                              | 1 watt                            |
| <b>Outputs</b>                        |                                   |
| SRC-DO2-24V-1                         | 2 Relay Outputs                   |
| SRC-AO-x-V                            | 1 analog 0-10V output, 20 mA max  |
| SRC-AO-x-VV                           | 2 analog 0-10V outputs, 20 mA max |
| <b>Communication</b>                  | EnOcean Wireless                  |
| <b>Antenna</b>                        | Internal                          |
| <b>Frequency</b>                      | 315MHz, 902MHz                    |
| <b>Range</b>                          | 70-100 ft, typical in building    |
| <b>Max Number of Wireless Devices</b> | Up to 32 EnOcean Transmitters     |

|                              |  |
|------------------------------|--|
| <b>Enclosure</b>             | ABS plastic, Red                           |
| <b>Mounting</b>              | Surface mount with screw terminal          |
| <b>Operating Temperature</b> | -4° to 140°F (-20° to 60°C)                |
| <b>Operating Humidity</b>    | 0-70% RH non-condensing                    |
| <b>Dimensions</b>            | 1.89" x 2.76" x 1.77"<br>(48 x 70 x 45 mm) |
| <b>Weight</b>                | 0.13 lb (0.06 kg)                          |
| <b>Approval</b>              | CE, FCC, RoHS                              |
| <b>Warranty</b>              | 2 years                                    |

### WIRING

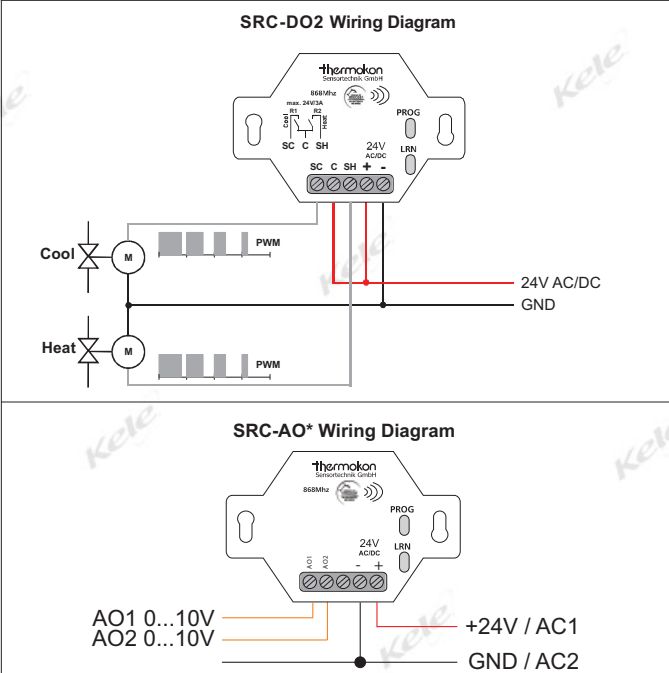

### ORDERING INFORMATION

| MODEL                    | DESCRIPTION                                    |
|--------------------------|--|
| <b>SRC-DO2-24V-1</b>     | Thermostat-Actuator, 2xDO, 24V                 |
| <b>SRC-AO-MULTI-V</b>    | Multi-Actuator, 1xAO, 0-10V, 24V               |
| <b>SRC-AO-MULTI-VV</b>   | Multi-Actuator, 2xAO, 0-10V, 24V               |
| <b>SRC-AO-CLIMATE-VV</b> | Actuator for heating/cooling, 2xAO, 0-10V, 24V |
| <b>SRC-AO-DIM-V</b>      | Dimming-Actuator, 1xAO, 0-10V, 24V             |
| <b>SRC-AO-DIM-VV</b>     | Dimming-Actuator, 2xAO, 0-10V, 24V             |

† Add -315 for 315 MHz or -902 for 902 MHz at the end of the part number to order.

13

NETWORK & WIRELESS