

PANEL FABRICATION



DOUBLE ROW TERMINAL STRIPS TS SERIES

DESCRIPTION

The **Altech TS Series** double row of through screw terminal strips are a cost-effective alternative to barrier strips or other types of terminal blocks. They're easy to use; simply strip the wire and insert and tighten the terminal screw. The tubular screw terminal strips feature a dead front design that prevents shocks and shorts. The polyamide nylon strips can be readily field-cut to the desired number of poles using only a utility or pocket knife.

FEATURES

- Tubular screw clamp connection with wire protector
- Opaque white polyamide 6.6 housing
- Panel mounting or free floating
- Recessed metal parts for finger protection
- Easily cut to the required number of poles
- Surface mounted




TS1 Series
(2, 3, and 12 pole strips)



SPECIFICATIONS

Rated Voltage	300V
Rated Current	
TS1.5	15A
TS6	40A
Connections	Tubular screw clamp with wire protector
Pole Spacing	
TS1.5	0.32" (0.8 cm) 38 terminals/ft
TS6	0.47" (1.2 cm) 25 terminals/ft
Rated Wire Size	
TS1.5	22-14 AWG
TS6	18-8 AWG
Recommended Torque	6.6 in-lb (0.75 Nm)
Materials	
Of Construction	Polyamide 6.6
Approvals	UL File #E103245; CSA File #LR38962
Warranty	1 year

DIMENSIONS

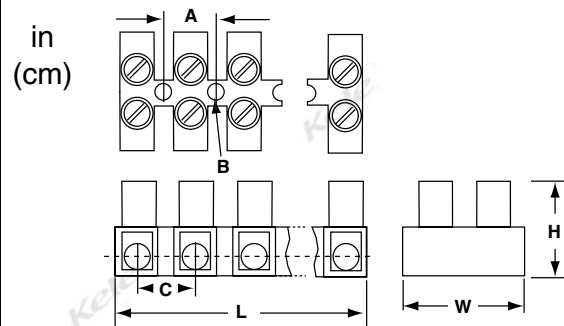

MODEL	L	W	H	A	B	C
TS1.5/2WP	0.53 (1.35)					
TS1.5/3WP	0.85 (2.16)					
TS1.5/4WP	1.16 (2.95)	0.72 (1.82)	0.61 (1.55)	0.32 (0.8)	Ø0.11 (0.28)	0.32 (0.81)
TS1.5/10WP	3.04 (7.72)					
TS1.5/12WP	3.66 (9.30)					
TS6/12WP	5.51 (13.99)	0.91 (2.32)	0.70 (1.77)	0.47 (1.19)	Ø0.17 (0.42)	0.47 (1.19)

ORDERING INFORMATION

MODEL	DESCRIPTION
TS1.5/2WP	Double row 15A terminal strip, two poles
TS1.5/3WP	Double row 15A terminal strip, three poles
TS1.5/4WP	Double row 15A terminal strip, four poles
TS1.5/10WP	Double row 15A terminal strip, 10 poles
TS1.5/12WP	Double row 15A terminal strip, 12 poles
TS6/12WP	Heavy-duty double row 40A terminal strip, 12 poles

ACCESSORIES
MPB6 Marking plate, blank (for use with TS6/12WP)