

Main catalog

SNK series Terminal blocks












SNK series, terminal blocks, accessories, marking solutions

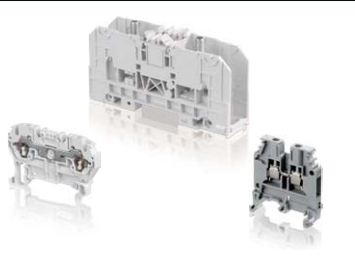Ranges and technologies presentation	2	1
PI-Spring terminal blocks	13	2
Screw clamp terminal blocks	49	3
Pluggable terminal blocks	133	4
Accessories	149	5
Marking solutions	187	6
Index	220	7
Marketing material	232	8

Connection devices offering

1

ABB proposes one of the largest connection offering on the market with various technologies: screw, PI-Spring, spring, IDC, pluggable, stud, etc. technologies found in over 8000 products & solutions.

	SNA series		SNK series		Terminal blocks
Purpose	Standard industrial applications		Preferred terminal blocks for: <ul style="list-style-type: none"> – Standard and High standard industries – Building industry – Channel partners 		Preferred terminal blocks and exclusive technologies for dedicated applications and markets (energy, railway, process automation, petro-chemical, etc.)
					
Product families & functions	Screw	Feed-through Multi-deck Ground Disconnect For fuses	Screw	Feed-through Multi-deck Ground Disconnect For fuses Test & measurement Marshalling	Technologies Screw clamp Spring clamp ADO System® Pluggable Safety (spring loaded) Ring lug Stud Quick-connect Functions Protection: PEN, neutral switch Disconnect: multilevel, plugs, etc. For fuse protection Test & Measurement Sensor actuator For distribution boxes Space saving: miniblocks Power distribution Component holders
	Spring	Feed-through Double deck Ground Disconnect For fuses	PI-Spring	Feed-through Double deck Ground Disconnect For fuses	
	Stud	Feed-through	Pluggable PI-Spring	Feed-through 1 or 2 circuits	
Main catalogs	SNA series, terminal blocks		SNK series, terminal blocks		Solution series, terminal blocks
Interactive catalogs: Flash QR code	 		 		 

Web



www.abb.com/lowvoltage
catalogs, brochures, technical
datasheets, certificates, approvals



<http://new.abb.com/low-voltage/connection>
catalogs, videos, presentations,
drawings, tools

Solution series

ESSAILEC®	Interfast	Marking
<p>Test blocks for safe and reliable testing on CT and VT (current and voltage transformers) secondary circuits</p>	<p>PLC pre-wiring system for fast, flexible, reliable connection of PLC's in process automation applications</p>	<p>Markers & marking systems for all identification requirements in electrical panels</p>
		
<p>Current sockets & plugs Voltage sockets & plugs Polarity sockets & plugs Trip sockets & plugs Multicircuits sockets & plugs Coding accessories Protection covers Etc.</p>	<p>Interfast PCB: Compact & standard modules Interfast MS: Modular system based on terminal block technology Functions:</p> <ul style="list-style-type: none"> - 1 to 4 wire connections (sensors) - Disconnect - Fuse - Signal indication - Relays - Optocouplers - Solenoid valve control - Galvanic isolation (2.5 kV) 	<p>Terminal block identification and group markers Wire and cable identification Component and equipment identification Panel identification Pre-printed markers for terminal blocks</p>
<p>ESSAILEC®, test blocks</p>  	<p>Interface modules & selection guides</p>   <p>www.web-edia.com/interfast</p>	<p>Marking solutions</p>  



<http://abb-control-products.partcommunity.com>
3D & 2D drawings download

SNK series, terminal blocks

PI-Spring and Screw clamp technologies


1

Smart Connections

PI-Spring technology



- 2 technologies in 1 connection: push-in and spring
- Perfect connection with or without ferrule
- Easy and safe insertion of both conductor and screwdriver
- Excellent pulling strength
- High corrosion resistance (> 1000 h)
- Shock and vibration proof
- Excellent electrical contact stability
- Available in pluggable version.

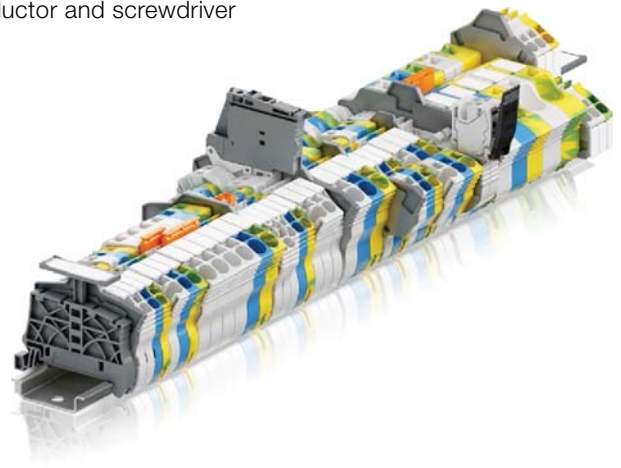

Smart Logistics

Common accessories



Compact screwless and screw end stops



Plug-in insulated jumpers



Cross spacing jumpers

PI-Spring and Screw clamp

Smart Design

Installation is optimized and secured



Asymmetrical Design avoids mounting errors




Engineered conductor entry for ease of wiring

Screw clamp technology



- High torque resistance
- The retightening campaigns are not needed anymore thanks to the ABB exclusive anti-release system
- Hardened steel makes the connection very reliable
- Flap avoiding the insertion of cable underneath the clamp
- Available in pluggable version

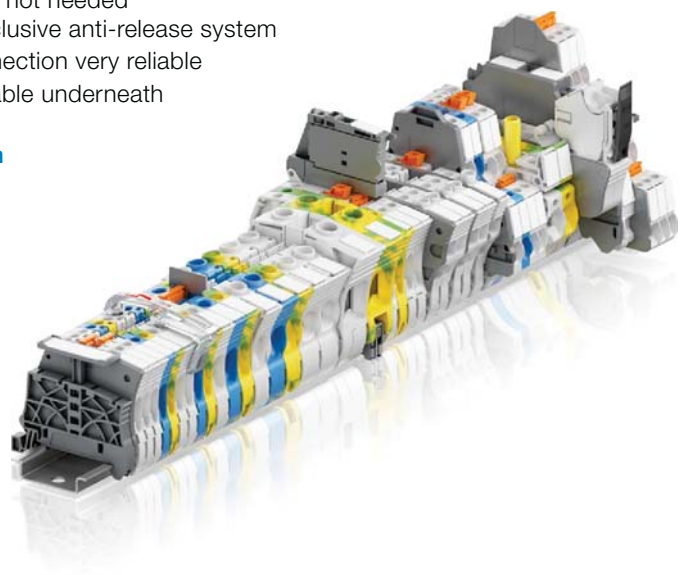

Testing devices



Screwless component plugs



Blank and pre-marked markers

technologies terminal blocks



Fewer parts to stock with common end sections



Convenient jumpering system up to 50 poles, divisible



Clear terminal block identification
Top large marker. Hand pre-marking before final marker installation

ABB PI-Spring technology


Two technologies in one connection

1

The patented design of ABB's PI-Spring can be used as a Push-in or traditional spring connection: Push-in and spring. The Push-in mode allows a direct one-step insertion of solid and flexible stranded wires with a ferrule, 50% faster than standard screw clamp technology.

Using the spring mode, very little effort is required to open the spring clamp with a screwdriver and insert the wire, which does not need a ferrule. The screwdriver locks in the terminal block after insertion, freeing up hands to manipulate wires or circuit drawings.

Features

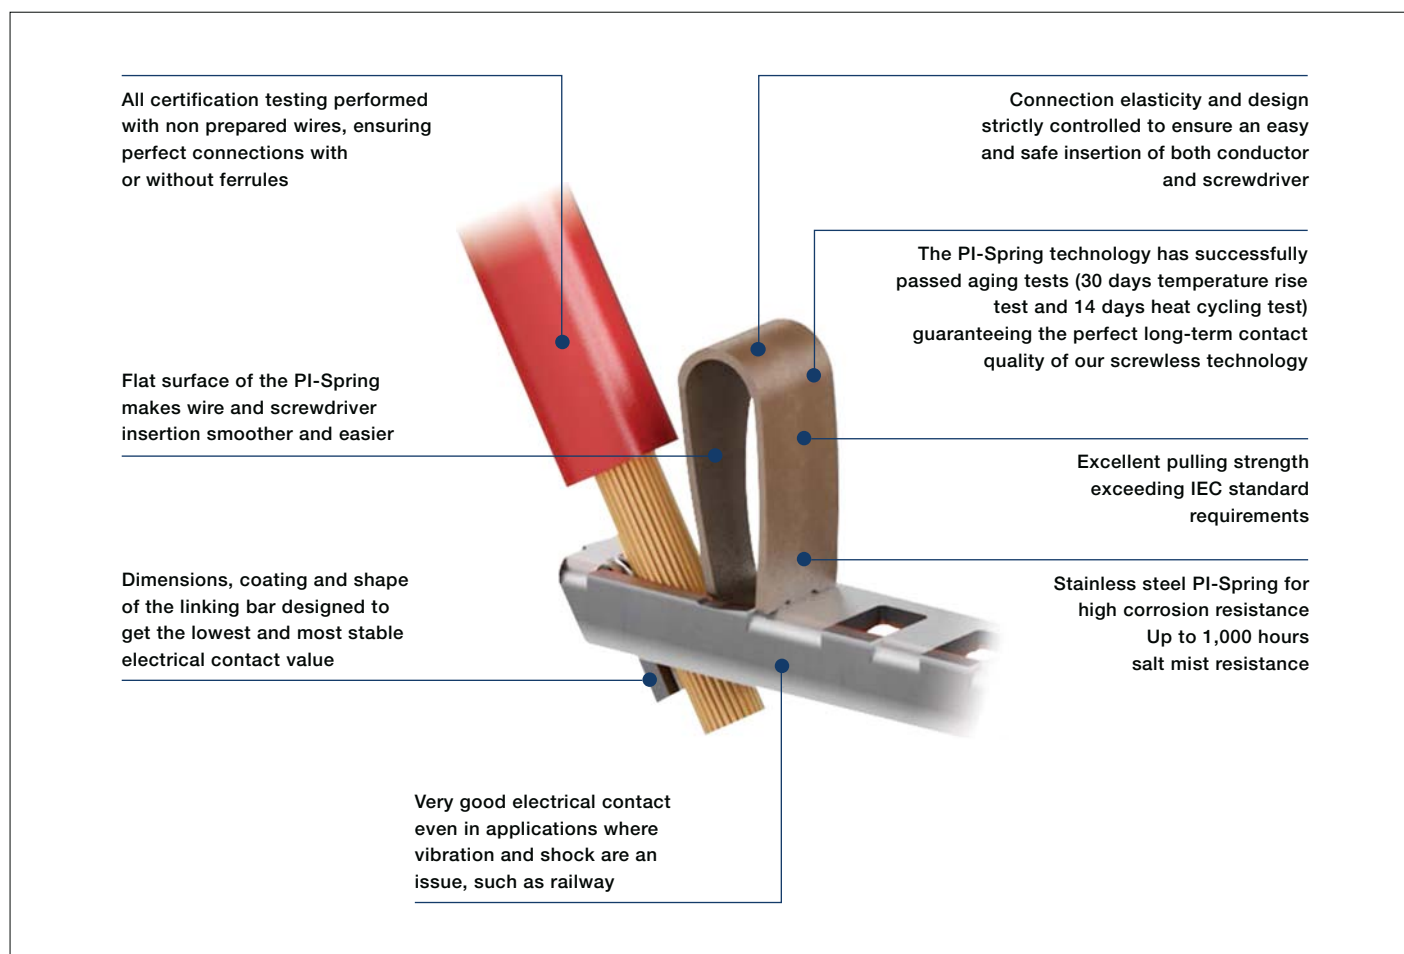

From 0.2 mm² up to 25 mm²
From 26 AWG up to 4 AWG

ABB screw clamp technology

The heavy duty connection

Unique design, flies over time thanks to its reliability and safety


The ABB screw clamp technology is designed to avoid accidental releases due to vibrations, shocks or even abusive cable draw.

High density capacity

The screw clamp technology can fit up to two conductors per clamp which offers extended possibilities in electrical cabinets.

1

Features

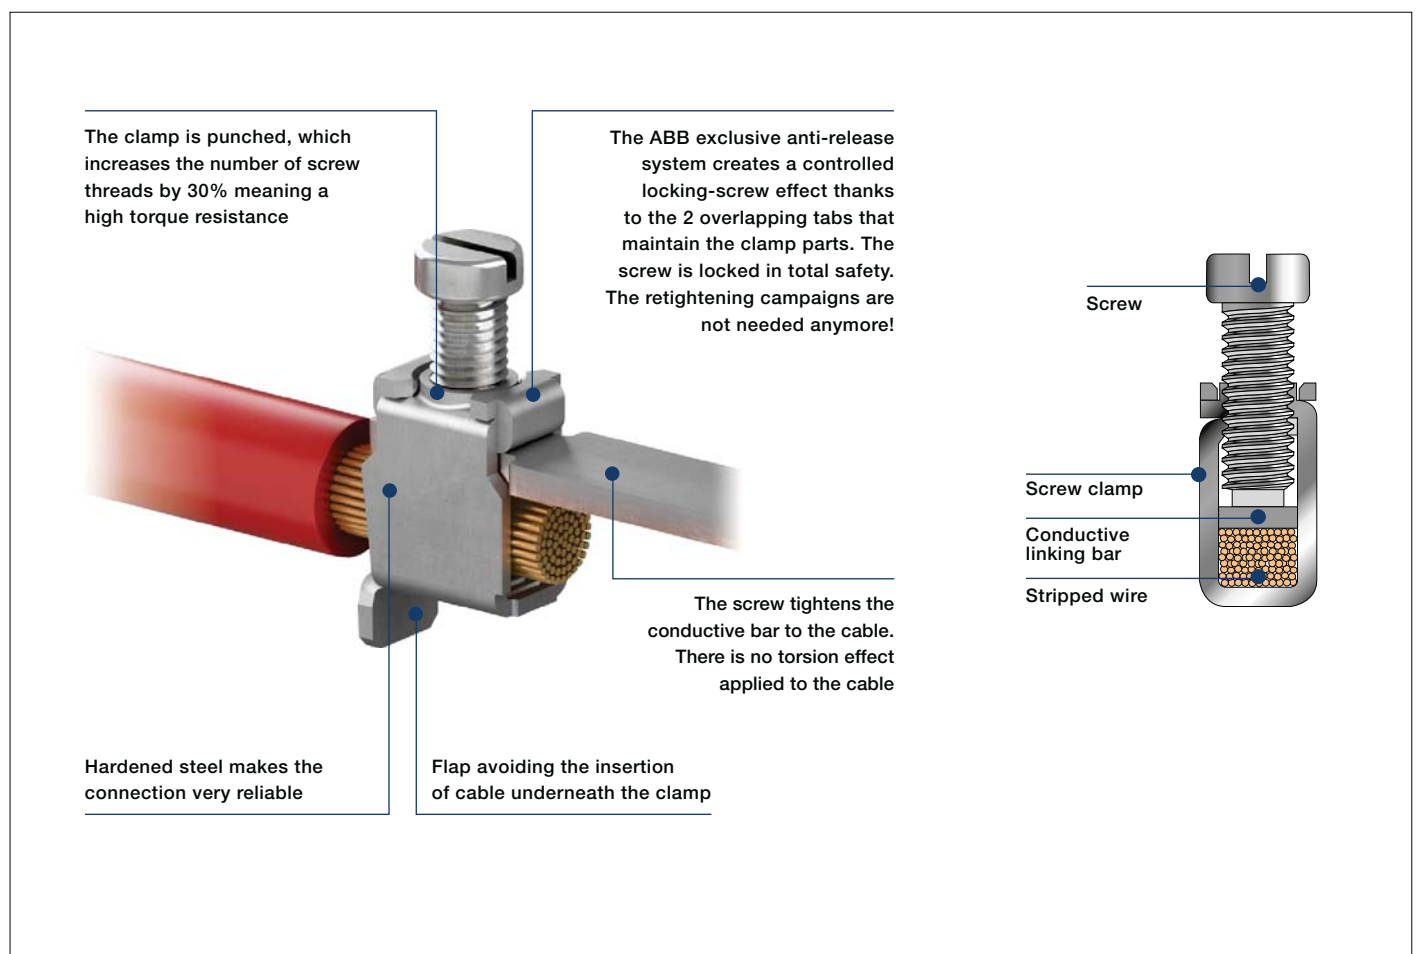


From 0.2 mm² up to 120 mm²
From 24 AWG up to 0000 Kcmil

ABB pluggable technology


1

The pluggable technology allows "plug and play" connection. It enables productivity savings, wiring optimization thanks to serialized pre-wired plugs harnesses, as well as secured final commissioning.

Features

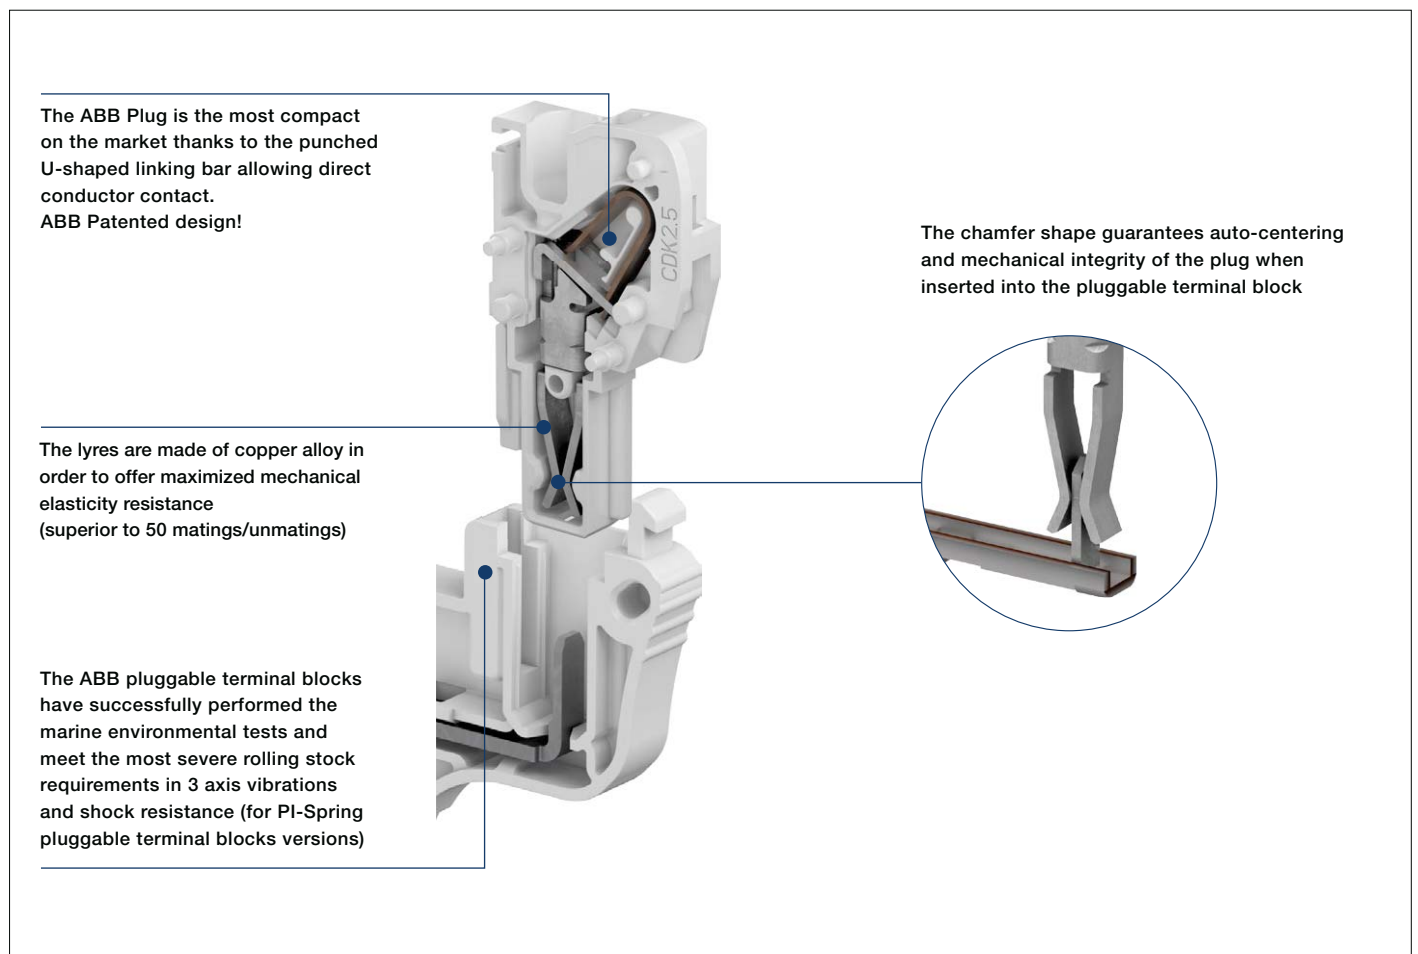

From 0.2 mm² up to 4 mm²
From 26 AWG up to 10 AWG

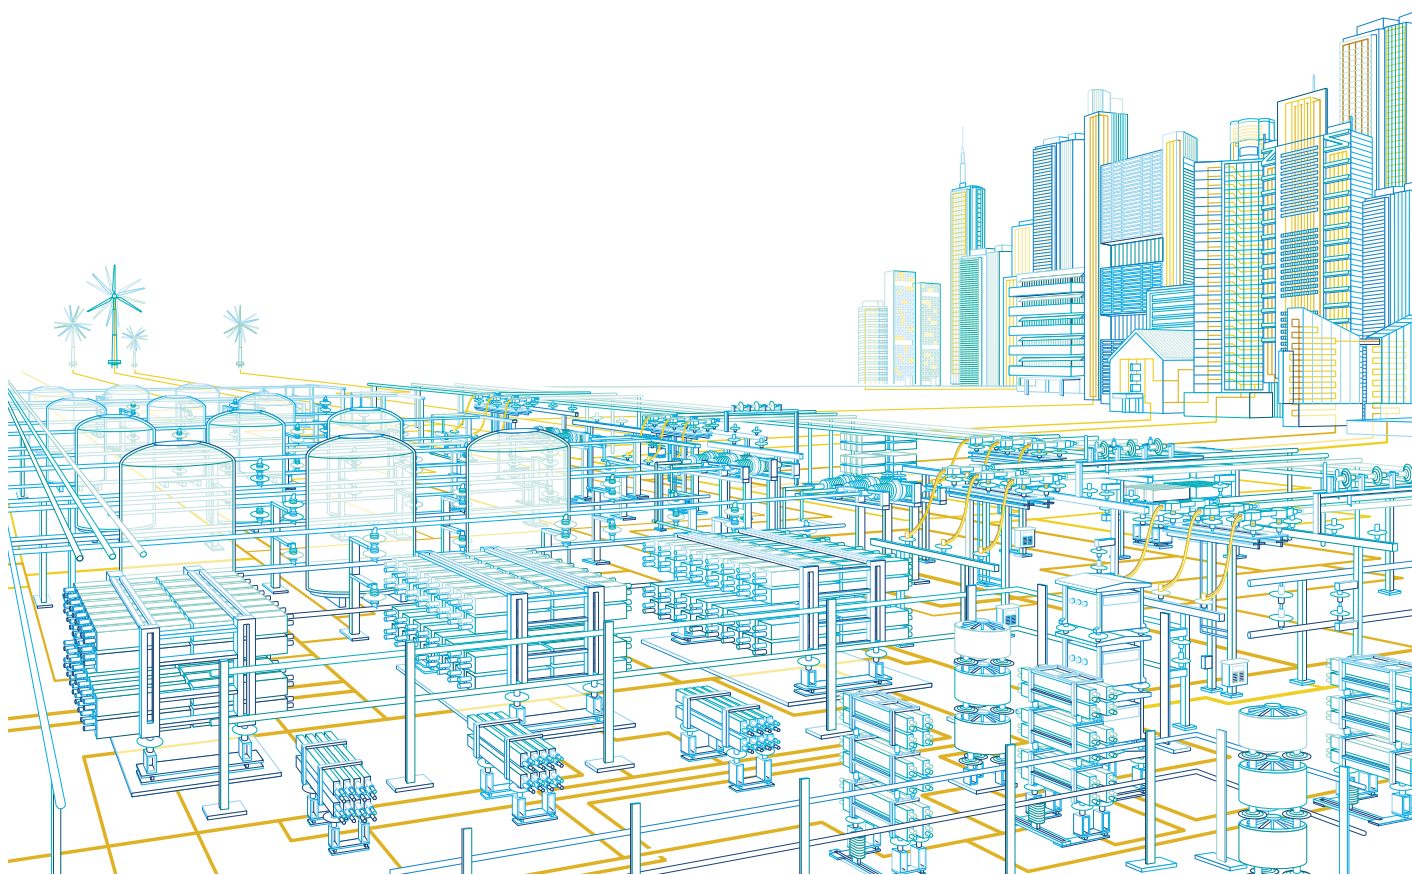

SNK series, terminal blocks

Applications

1

Qualified for worldwide markets, applications and for severe environments: vibration, shock, corrosion...

Industry and Commercial



Solar



SNK series, terminal blocks can be used worldwide in all types of industrial and commercial applications. All our products have CB, UL and CSA third party certificates delivered by independent laboratories. SNK series products are developed and qualified in accordance with the following international standards: IEC 60947-1, IEC 60947-7-1, IEC 60947-7-2, IEC 60947-7-3, UL 1059, CSA C22.2 n°158-10.

Thanks to their 1000 V rating per IEC 60947-7-1, SNK terminal blocks are ideally suited for use in solar equipment.



Railways



All SNK series products are suited to trackside fixed equipment. For the more demanding environment of rolling stock applications, PI-Spring has been successfully tested in accordance with IEC 61373 requirements to resist high vibration and shock conditions (multi-axial waves, acceleration...).

The plastic material used is compliant with the flammability, smoke toxicity and opacity severe requirements of the traction segment and can be classified I2F2 per NF F 16-101 and NF F 16-102 standards; HL3 R22 per EN 45 545 standard and V0 per UL94 standard.

It complies with NFPA 130 per ASTM E 162 and ASTM E 662 standards tests and with FR238.103 and BSS 7239 standards.

The IRIS certificate guarantees the respect of international railway industry requirements.



Hazardous locations



SNK series is certified IEC Ex in accordance with IEC 60079-0 and IEC 60079-7 (increased safety "Exe") world international standards for products used in explosive atmospheres.

In order to serve specific local market requirements, some SNK products have additional local certifications such as: ATEX, UL hazardous Locations or BR-Ex...

SNK products have successfully passed toughest tests like the thermal endurance test: 2 weeks in hot environment at 95 °C (+90% RH) followed by 2 weeks at 125 °C and one day cold environment test (-65 °C).

This proves the high mechanical performances of the SNK products.




Marine



SNK products have proven their performance by successfully passing tests required for the most extreme conditions. (eg: salt mist, damp or dry heat and cold environments) per IEC 60068 standards.

In order to serve the worldwide marine markets requirements, SNK products have the following Marine certifications: BV Marine, DNV, RINA, RMRS.



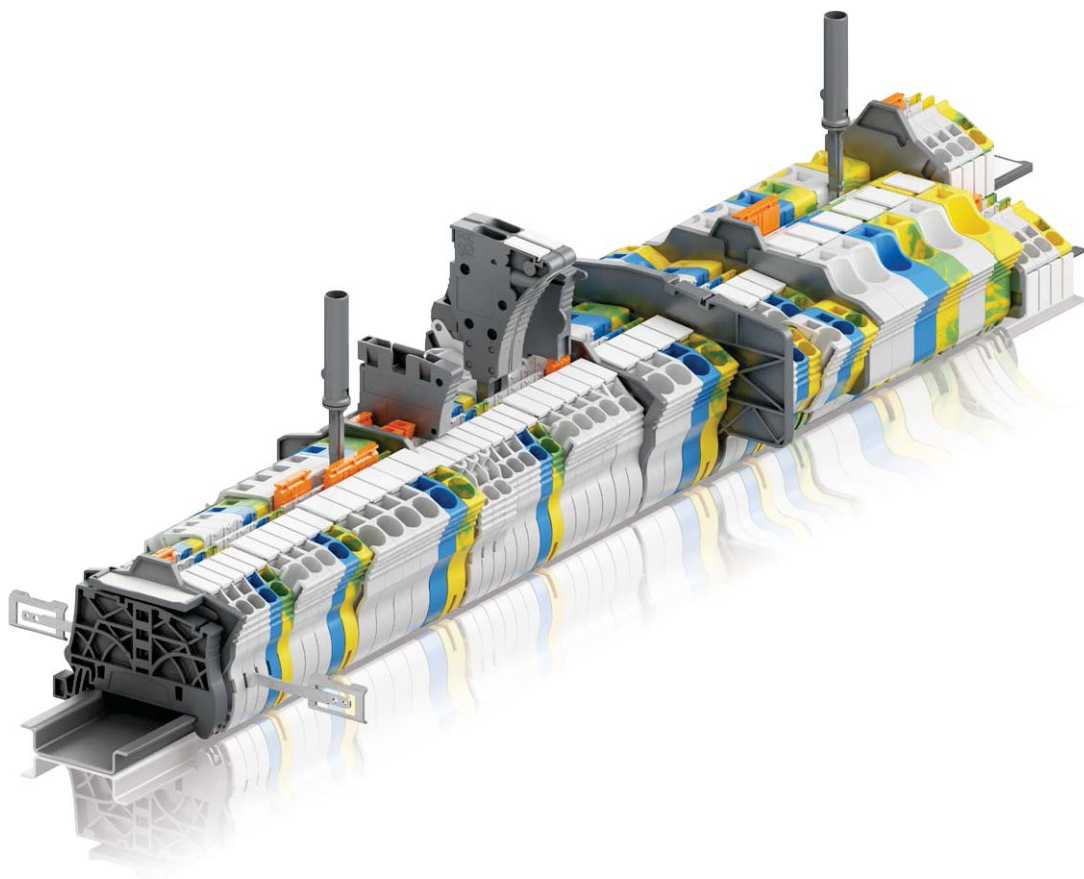

SNK series, terminal blocks

PI-Spring technology



Technologies presentation		14
Overview		18
Feed-through		
2.5 mm ² / 12 AWG	ZK2.5	19
	ZK2.5-3P with 3 connections	20
	ZK2.5-4P with 4 connections	21
4 mm ² / 10 AWG	ZK4	22
	ZK4-3P with 3 connections	23
	ZK4-4P with 4 connections	24
6 mm ² / 8 AWG	ZK6	25
	ZK6-3P with 3 connections	26
10 mm ² / 6 AWG	ZK10	27
16 mm ² / 4 AWG	ZK16	28
Ground		
2.5 mm ² / 12 AWG	ZK2.5-PE	29
	ZK2.5-PE-3P with 3 connections	30
	ZP2.5-PE-4P with 4 connections	31
4 mm ² / 10 AWG	ZK4-PE	32
	ZK4-PE-3P with 3 connections	33
	ZK4-PE-4P with 4 connections	34
6 mm ² / 8 AWG	ZK6-PE	35
	ZK6-PE-3P with 3 connections	36
10 mm ² / 6 AWG	ZK10-PE	37
16 mm ² / 4 AWG	ZK16-PE	38
Disconnect with blade		
2.5 mm ² / 12 AWG	ZK2.5-S with test sockets	39
	ZK2.5-S-R1	40
Disconnect with plug		
2.5 mm ² / 12 AWG	ZK2.5-SP with test sockets	41
For 5x20 fuses		
2.5 mm ² / 12 AWG	ZK2.5-SF	42
	ZK2.5-SF-R with blown fuse indicator	43
Double deck		
2.5 mm ² / 12 AWG	ZK2.5-D2 2 feed-through circuits	44
	ZK2.5-D1 1 feed-through circuit	45
	ZK2.5-D2-PE 1 feed-through circuit and 1 ground circuit	46
	ZK2.5-D1-PE 1 ground circuit	47

SNK series, terminal blocks PI-Spring technology

2



Rely on our steady quality

ABB registered 3 patents for the PI-Spring technology. The ABB's manufacturing and quality control processes guarantee that each PI-Spring terminal block is easy to connect.



Qualified for worldwide markets and applications, such as hazardous locations, marine, railways.



The benefits of 2 technologies in 1 connection

50% faster connection time with Push-in mode
Our connection technology allows a direct one step insertion with rigid and prepared flexible conductors.

Reduced effort and conductor preparation time with spring mode
Our connection requires minimal effort to insert wires with the screwdriver. Flexible conductors preparation is not necessary.



Two technologies in one single connection



Selection is simplified, stocking is significantly reduced

50% less inventory makes PI-Spring attractive to all markets worldwide

- Stock only one range, get two connection modes (Push-in and spring)
- The user selects one range which has global certifications and access to markets and applications worldwide.

Reduce your accessories inventory by up to 50%

- SNK PI-Spring and screw ranges share the same accessories
- All end sections and circuit separators fit several types and sizes of blocks.



Installation is optimized and secured

Avoid mounting and wiring errors

- Asymmetrical design allows immediate visual check in case of reversed terminal blocks
- Circuit identification is improved thanks to the 20% larger marking area.

Save up to 15% space in your cabinet


- Our compact design saves valuable space between cable trunks
- The 30° conductor entry angle allows up to a 15% decrease in height while allowing a generous bend radius.

Speed up your projects


- Pre-mark by hand or with label on our flat marking surface and start immediately the wiring, before the final markers mounting
- Spare markers re-printing as well in case of modifications.



Asymmetrical design avoid mounting errors

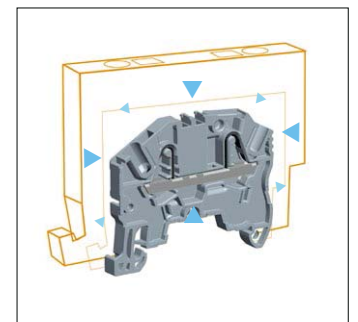

Compact terminal blocks



Clear terminal block identification

SNK series, terminal blocks

PI-Spring technology

Range overview from 2.5 to 16 mm²

2




2 Connections

Single deck
Feed-through
Ground
Disconnect
Fuse



3 Connections

Single deck
Feed-through
Ground

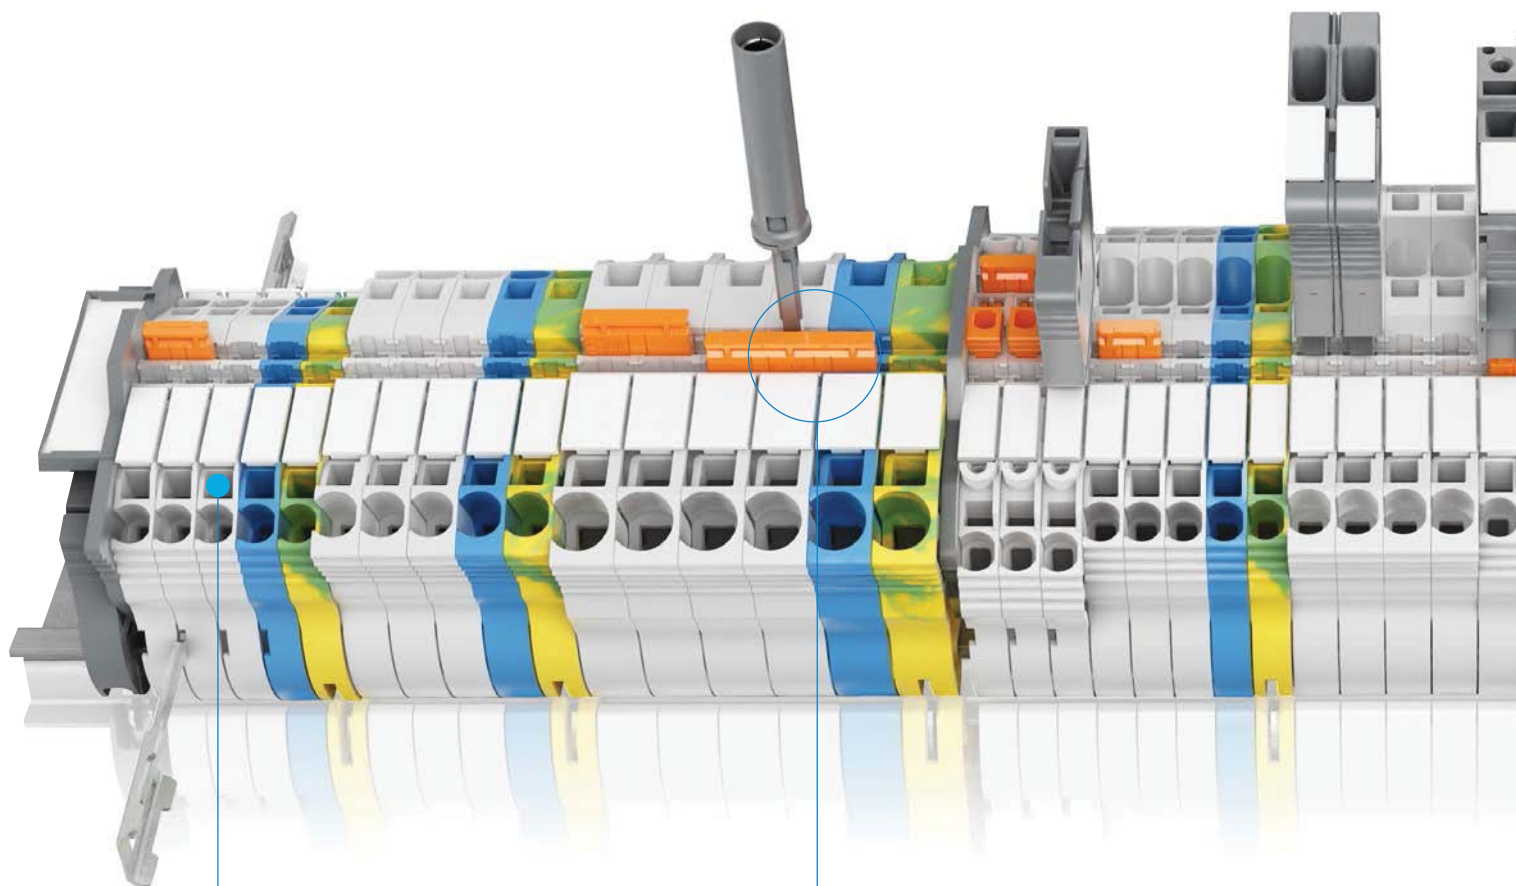

Voltage test
screwdriver entry point
accepts Category II probes

Double central channels
allows multiconfigurations
(jumping, testing and measuring)




4 Connections

Single deck
Feed-through
Ground



2x2 Connections

Double deck
Feed-through
Ground

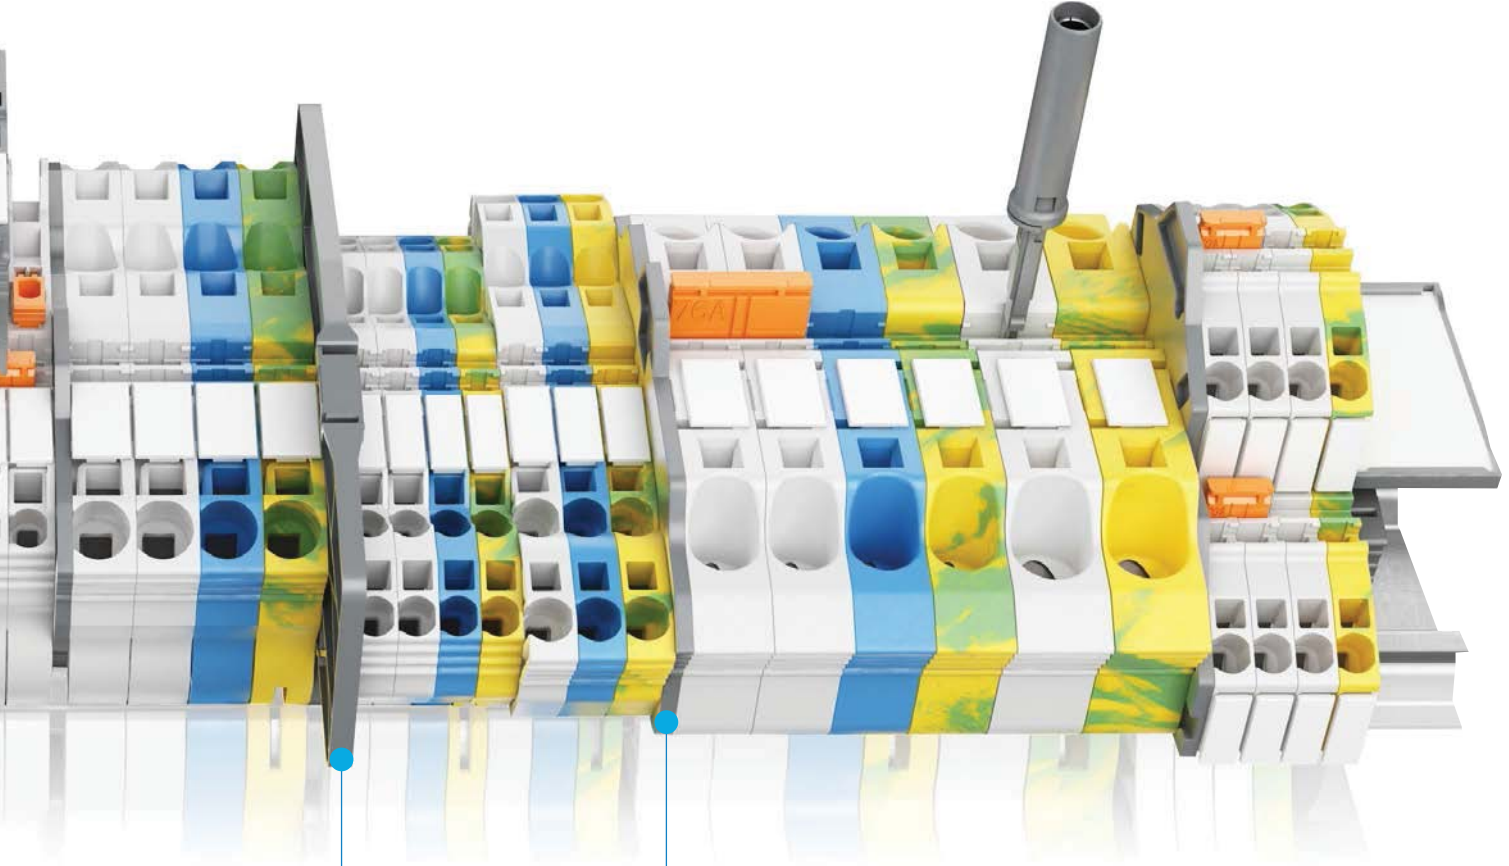

Two circuit
separators
for the entire range

End section
can be used as circuit separator

SNK series, terminal blocks


PI-Spring technology



2



		Feed-through			Ground		
Section							
2.5 mm ²	12 AWG	ZK2.5	ZK2.5-3P	ZK2.5-4P	ZK2.5-PE	ZK2.5-PE-3P	ZK2.5-PE 4P
4 mm ²	10 AWG	ZK4	ZK4-3P	ZK4-4P	ZK4-PE	ZK4-PE-3P	ZK4-PE- 4P
6 mm ²	8 AWG	ZK6	ZK6-3P		ZK6-PE	ZK6-PE-3P	
10 mm ²	6 AWG	ZK10			ZK10-PE		
16 mm ²	4 AWG	ZK16			ZK16-PE		

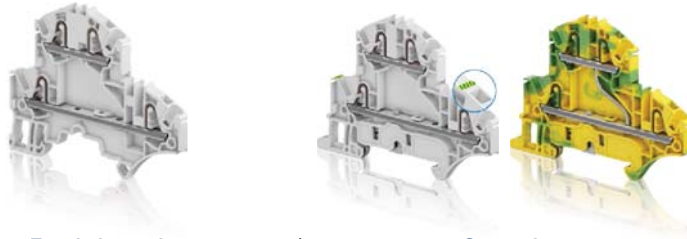

		Feed-through		Ground	
Section					
2.5 mm ²	12 AWG	ZK2.5-D2	ZK2.5-D1	ZK2.5-D2-PE	ZK2.5-D1-PE




		With blade	With plug	For 5x20 mm fuses	Aligned with ZK2.5-SF
Section					
2.5 mm ²	12 AWG	ZK2.5-S	ZK2.5-SP	ZK2.5-SF	ZK2.5-SF-R1 ZK2.5-SF-R3
					ZK2.5-S-R1

All the technical data for UL/CSA standard and dimensions in inches are in *italic*.


Clamp -
 Channels for jumpering or testing -
 Test socket -
 Blown-fuse indicator

ZK2.5 PI-Spring terminal blocks



Feed-through - 5.2 mm 0.205 in spacing



ZK2.5



5.2 mm 0.205 in spacing

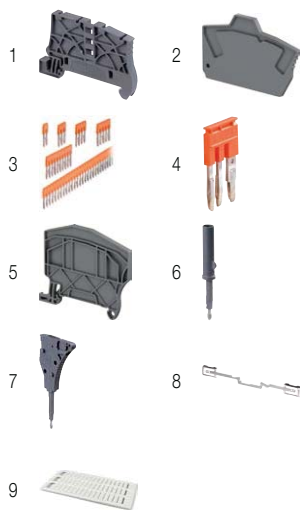

Description

Combine high performance with compact dimensions:

- 1000 V AC / DC IEC 600 V UL,
- Opt for the best marking visibility thanks to the up-front, flat marker zone, which lets you mark up to eight digits or increase the font size.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 2 connections	Grey	ZK2.5	1SNK705010R0000	50	5.50
	Blue	ZK2.5-BL	1SNK705020R0000	50	5.50
	Orange	ZK2.5-OR	1SNK705030R0000	50	5.50
	Yellow	ZK2.5-YL	1SNK705060R0000	50	5.50
	Green	ZK2.5-GN	1SNK705061R0000	50	5.50
	Red	ZK2.5-RD	1SNK705062R0000	50	5.50
	White	ZK2.5-WH	1SNK705065R0000	50	5.50
	Black	ZK2.5-BK	1SNK705066R0000	50	5.50

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 2.5 mm ²	26 ... 14 AWG	Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		24 A / 2.5 mm ²	20 A / 12 AWG		
Rated short-time withstand current (1s)		300 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		1000 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		693 V 21 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IC/IIIC			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK2.5	1SNK705910R0000	20	1.80	
3 Jumper bars	Orange	2 poles	JB5-2	1SNK905302R0000	50	1.30
		3 poles	JB5-3	1SNK905303R0000	50	2.00
		4 poles	JB5-4	1SNK905304R0000	50	2.70
		5 poles	JB5-5	1SNK905305R0000	50	3.50
		10 poles	JB5-10	1SNK905310R0000	30	7.10
		50 poles	JB5-50	1SNK905350R0000	10	36.00
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	CS-R2	1SNK900106R0000	20	3.80	
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
			SHBP	1SNK900601R0000	20	4.10
8 Shield connectors						
9 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK2.5	Green-yellow	ZK2.5-PE	1SNK705150R0000	20	10.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.


ZK2.5-3P PI-Spring terminal blocks

Feed-through with 3 connections - 5.2 mm 0.205 in spacing




2.5 mm²
12 AWG

2



1SNK162061V0014

ZK2.5-3P



5.2 mm 0.205 in spacing

Description

Find all the features of the ZK2.5 terminal block with the added option of distributing or branching 3 conductors.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 3 connections	Grey	ZK2.5-3P	1SNK705011R0000	50	7.40
	Blue	ZK2.5-3P-BL	1SNK705021R0000	50	7.40
	Orange	ZK2.5-3P-OR	1SNK705031R0000	50	7.40
	Yellow	ZK2.5-3P-YL	1SNK705067R0000	50	7.40
	Green	ZK2.5-3P-GN	1SNK705068R0000	50	7.40
	Red	ZK2.5-3P-RD	1SNK705069R0000	50	7.40
	White	ZK2.5-3P-WH	1SNK705072R0000	50	7.40
	Black	ZK2.5-3P-BK	1SNK705073R0000	50	7.40

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG
	Flexible	0.22 ... 2.5 mm ²	26 ... 14 AWG
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG
Rated current / Rated cross section		24 A / 2.5 mm ²	20 A / 12 AWG
Rated short-time withstand current (1s)		300 A	
Short Circuit Current Rating (with specific conditions)			100 kA
Rated voltage		1000 V	600 V
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1
Increased safety Ex e		693 V 21 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IIc	

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40	
3 Jumper bars	Orange	2 poles	JB5-2	1SNK905302R0000	50	1.30
		3 poles	JB5-3	1SNK905303R0000	50	2.00
		4 poles	JB5-4	1SNK905304R0000	50	2.70
		5 poles	JB5-5	1SNK905305R0000	50	3.50
		10 poles	JB5-10	1SNK905310R0000	30	7.10
		50 poles	JB5-50	1SNK905350R0000	10	36.00
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40	
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
		Blank card	MC512	1SNK140000R0000	22	9.00
8 Terminal block markers	White	Universal wire markers holder	MC512PA	1SNK149999R0000	20	10.00
		Blank marker	UMH	1SNK900611R0000	10	0.20
			MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK2.5-3P	Green-yellow	ZK2.5-PE-3P	1SNK705151R0000	20	11.90


All the technical data for UL/CSA standard and dimensions in inches are in italic.

ZK2.5-4P PI-Spring terminal blocks

Feed-through with 4 connections - 5.2 mm 0.205 in spacing



ZK2.5-4P



5.2 mm 0.205 in spacing

Description

Find all the features of the ZK2.5 terminal block with the added option of distributing or branching 4 conductors.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 4 connections	Grey	ZK2.5-4P	1SNK705012R0000	50	9.00
	Blue	ZK2.5-4P-BL	1SNK705022R0000	50	9.00
	Orange	ZK2.5-4P-OR	1SNK705032R0000	50	9.00
	Yellow	ZK2.5-4P-YL	1SNK705074R0000	50	9.00
	Green	ZK2.5-4P-GN	1SNK705075R0000	50	9.00
	Red	ZK2.5-4P-RD	1SNK705076R0000	50	9.00
	White	ZK2.5-4P-WH	1SNK705079R0000	50	9.00
	Black	ZK2.5-4P-BK	1SNK705080R0000	50	9.00

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	 TH 35-7.5, TH 35-15
	Flexible	0.22 ... 2.5 mm ²	26 ... 14 AWG		
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG	Wire stripping length	 11 mm 0.433 in
Rated current / Rated cross section		24 A / 2.5 mm ²	20 A / 12 AWG	Tool (for flexible conductor without ferrule)	 Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated short-time withstand current (1s)		300 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		1000 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		693 V 21 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/III C			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK2.5-4P	1SNK705912R0000	20	2.70	
3 Jumper bars	Orange	2 poles	JB5-2	1SNK905302R0000	50	1.30
		3 poles	JB5-3	1SNK905303R0000	50	2.00
		4 poles	JB5-4	1SNK905304R0000	50	2.70
		5 poles	JB5-5	1SNK905305R0000	50	3.50
		10 poles	JB5-10	1SNK905310R0000	30	7.10
		50 poles	JB5-50	1SNK905350R0000	10	36.00
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40	
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
8 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK2.5-4P	Green-yellow	ZK2.5-PE-4P	1SNK705152R0000	20	13.60

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.



ZK4 PI-Spring terminal blocks

Feed-through - 6 mm 0.236 in spacing




2



1SNK162030V0014

ZK4



6 mm 0.236 in spacing

Description

Combine high performance with compact dimensions:

- 1000 V AC / DC IEC 600 V UL,
- Opt for the best marking visibility thanks to the up-front, flat marker zone, which lets you mark up to eight digits or increase the font size.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 2 connections	Grey <input type="checkbox"/>	ZK4	1SNK706010R0000	50	7.90
	Blue <input type="checkbox"/>	ZK4-BL	1SNK706020R0000	50	7.90
	Orange <input type="checkbox"/>	ZK4-OR	1SNK706030R0000	50	7.90

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule	0.5 ... 6 mm ²	26 ... 10 AWG	Rail
	0.5 ... 4 mm ²	26 ... 12 AWG	Wire stripping length
	0.5 ... 4 mm ²	26 ... 12 AWG	Tool (for flexible conductor without ferrule)
	0.5 ... 4 mm ²	26 ... 12 AWG	
2 conductors per clamp Flexible with twin ferrule	0.5 ... 1 mm ²	26 ... 18 AWG	TH 35-7.5, TH 35-15 13 mm 0.492 in Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section	32 A / 4 mm ²	30 A / 10 AWG	
Rated short-time withstand current (1s)	480 A		
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage	1000 V	600 V	
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	
Increased safety Ex e	693 V 29 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/III		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	BAZ1	1SNK900002R0000	50	5.30
2 End sections 2 mm 0.079 in	Dark grey <input type="checkbox"/>	EK2-5	1SNK705910R0000	20	1.80
3 Jumper bars 2 poles 3 poles 4 poles 5 poles 10 poles 50 poles	Orange <input type="checkbox"/>	JB6-2	1SNK906302R0000	50	1.30
		JB6-3	1SNK906303R0000	50	2.10
		JB6-4	1SNK906304R0000	50	2.90
		JB6-5	1SNK906305R0000	50	3.60
		JB6-10	1SNK906310R0000	20	7.40
		JB6-50	1SNK906350R0000	10	38.10
4 Cross spacing jumpers	Orange <input type="checkbox"/>	JB85-3	1SNK900603R0000	10	2.80
5 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R2	1SNK900106R0000	20	3.80
6 Test adapters For test plugs DIA 2 mm 0.079 in For test plugs DIA 4 mm 0.157 in	Dark grey <input type="checkbox"/>	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
7 Test connectors End module, 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20
8 Spacers 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80
9 Terminal block markers Blank card Universal wire markers holder Blank marker	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

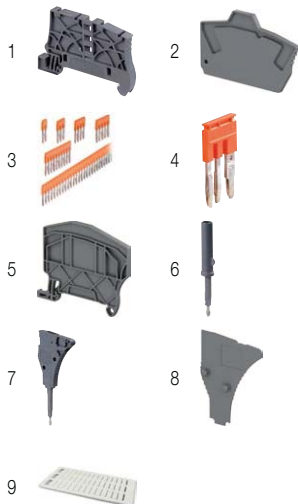


Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK4	Green-yellow <input type="checkbox"/>	ZK4-PE	1SNK706150R0000	20	12.60


All the technical data for UL/CSA standard and dimensions in inches are in italic.

ZK4-3P PI-Spring terminal blocks

Feed-through with 3 connections - 6 mm 0.236 in spacing



ZK4-3P



6 mm 0.236 in spacing

Description

Find all the features of the ZK4 terminal block with the added option of distributing or branching 3 conductors.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 3 connections	Grey	ZK4-3P	1SNK706011R0000	50	11.00
	Blue	ZK4-3P-BL	1SNK706021R0000	50	11.00
	Orange	ZK4-3P-OR	1SNK706031R0000	50	11.00

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 6 mm²	26 ... 10 AWG
	Flexible	0.5 ... 4 mm²	26 ... 12 AWG
	with non insulated ferrule	0.5 ... 4 mm²	26 ... 12 AWG
	with insulated ferrule	0.5 ... 4 mm²	26 ... 12 AWG
2 conductors per clamp	Flexible with twin ferrule	0.5 ... 1 mm²	26 ... 18 AWG
Rated current / Rated cross section		32 A / 4 mm²	30 A / 10 AWG
Rated short-time withstand current (1s)		480 A	
Short Circuit Current Rating (with specific conditions)			100 kA
Rated voltage		1000 V	600 V
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1
Increased safety Ex e		693 V 29 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb IIC/IIIC	


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40	
3 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		50 poles	JB6-50	1SNK906350R0000	10	38.10
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40	
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
8 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
9 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

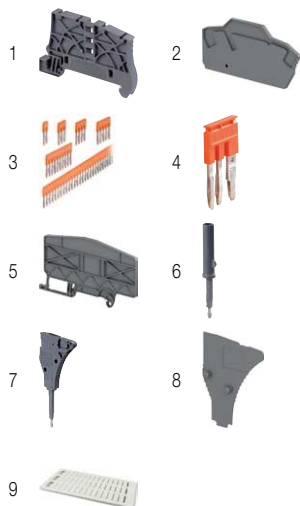

Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK4-3P	Green-yellow	ZK4-PE-3P	1SNK706151R0000	20	15.70

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.



ZK4-4P PI-Spring terminal blocks

Feed-through with 4 connections - 6 mm 0.236 in spacing



Description

Find all the features of the ZK4 terminal block with the added option of distributing or branching 4 conductors.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 4 connections	Grey	ZK4-4P	1SNK706012R0000	50	13.80
	Blue	ZK4-4P-BL	1SNK706022R0000	50	13.80
	Orange	ZK4-4P-OR	1SNK706032R0000	50	13.80


Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 6 mm²	26 ... 10 AWG
	Flexible	0.5 ... 4 mm²	26 ... 12 AWG
	with non insulated ferrule	0.5 ... 4 mm²	26 ... 12 AWG
with insulated ferrule	0.5 ... 4 mm²	26 ... 12 AWG	
2 conductors per clamp	Flexible with twin ferrule	0.5 ... 1 mm²	26 ... 18 AWG
Rated current / Rated cross section		32 A / 4 mm²	30 A / 10 AWG
Rated short-time withstand current (1s)		480 A	
Short Circuit Current Rating (with specific conditions)			100 kA
Rated voltage		1000 V	600 V
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1
Increased safety Ex e		693 V 29 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb IIC/IIC	

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



ZK4-4P



6 mm 0.236 in spacing

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK2.5-4P	1SNK705912R0000	20	2.70	
3 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		50 poles	JB6-50	1SNK906350R0000	10	38.10
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40	
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
8 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
9 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	



Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Ground PI-Spring terminal blocks


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK4-4P	Green-yellow	ZK4-PE-4P	1SNK706152R0000	20	18.40

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

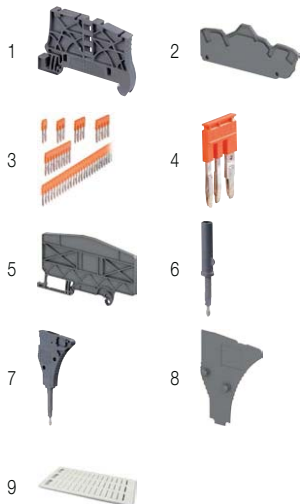


ZK6 PI-Spring terminal blocks

Feed-through - 8 mm 0.315 in spacing



ZK6



8 mm 0.315 in spacing

Description

Combine high performance with compact dimensions:

- 1000 V AC / DC IEC 600 V UL,
- Opt for the best marking visibility thanks to the up-front, flat marker zone, which lets you mark up to eight digits or increase the font size.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 2 connections	Grey	ZK6	1SNK708010R0000	50	11.80
	Blue	ZK6-BL	1SNK708020R0000	50	11.80
	Orange	ZK6-OR	1SNK708030R0000	50	11.80

Main technical data


Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 8 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 6 mm ²		Wire stripping length	13 mm 0.492 in
	with non insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
2 conductors per clamp	Flexible with twin ferrule	0.5 ... 1.5 mm ²	24 ... 16 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		41 A / 6 mm ²	50 A / 8 AWG		
Rated short-time withstand current (1s)		720 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		1000 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Increased safety Ex e 693 V 37 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb IIC/IIIC

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

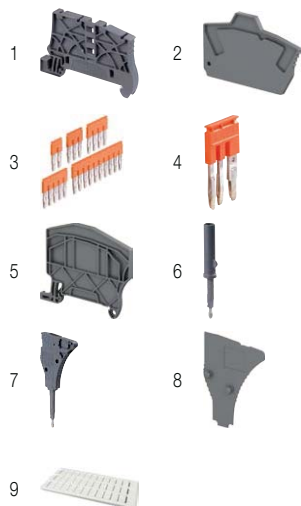

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK2.5	1SNK705910R0000	20	1.80
3 Jumper bars	Orange	JB8-2	1SNK908302R0000	50	2.70
		JB8-3	1SNK908303R0000	50	4.10
		JB8-4	1SNK908304R0000	50	5.60
		JB8-5	1SNK908305R0000	40	7.00
		JB8-10	1SNK908310R0000	20	14.20
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80
5 Circuit separators	Dark grey	CS-R2	1SNK900106R0000	20	3.80
6 Test adapters	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20
8 Spacers	Dark grey	ES-TC8	1SNK900104R0000	10	1.40
9 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings; Complete information available in the accessories section of the catalog.

Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK6	Green-yellow	ZK6-PE	1SNK708150R0000	20	20.30

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.




ZK6-3P PI-Spring terminal blocks

Feed-through with 3 connections - 8 mm 0.315 in spacing




6 mm²
8 AWG

2



1SNK162049V0014

ZK6-3P



8 mm 0.315 in spacing

Description

Find all the features of the ZK6 terminal block with the added option of distributing or branching 3 conductors.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 3 connections	Grey	ZK6-3P	1SNK708011R0000	50	16.70
	Blue	ZK6-3P-BL	1SNK708021R0000	50	16.70
	Orange	ZK6-3P-OR	1SNK708031R0000	50	16.70

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	24 ... 8 AWG	Rail TH 35-7.5, TH 35-15 Wire stripping length 13 mm 0.492 in
	Flexible	24 ... 10 AWG	
	with non insulated ferrule	24 ... 10 AWG	
	with insulated ferrule	24 ... 10 AWG	
2 conductors per clamp	Flexible with twin ferrule	24 ... 16 AWG	Tool (for flexible conductor without ferrule) Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		41 A / 6 mm ²	50 A / 8 AWG
Rated short-time withstand current (1s)		720 A	
Short Circuit Current Rating (with specific conditions)			100 kA
Rated voltage		1000 V	600 V
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1
Increased safety Ex e		693 V 37 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb IIC/IIC	

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK6-3P	1SNK708911R0000	20	2.80	
3 Jumper bars	Orange	2 poles	JB8-2	1SNK908302R0000	50	2.70
		3 poles	JB8-3	1SNK908303R0000	50	4.10
		4 poles	JB8-4	1SNK908304R0000	50	5.60
		5 poles	JB8-5	1SNK908305R0000	40	7.00
		10 poles	JB8-10	1SNK908310R0000	20	14.20
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40	
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
8 Spacers	Dark grey	ES-TC8	1SNK900104R0000	10	1.40	
9 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

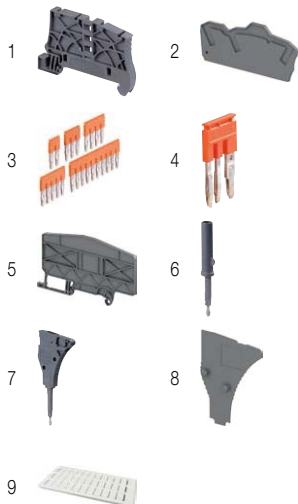


Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK6-3P	Green-yellow	ZK6-PE-3P	1SNK708151R0000	20	21.50


All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK10 PI-Spring terminal blocks

Feed-through - 10 mm 0.394 in spacing



ZK10



10 mm 0.394 in spacing

Description

Combine high performance with compact dimensions:

- 1000 V AC / DC IEC 600 V UL,
- Opt for the best marking visibility thanks to the up-front, flat marker zone, which lets you mark up to eight digits or increase the font size.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 2 connections	Grey <input type="checkbox"/>	ZK10	1SNK710010R0000	20	27.20
	Blue <input type="checkbox"/>	ZK10-BL	1SNK710020R0000	20	27.20
	Orange <input type="checkbox"/>	ZK10-OR	1SNK710030R0000	20	27.20

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 16 mm ²	20 ... 6 AWG
	Flexible	0.5 ... 10 mm ²	20 ... 8 AWG
	with non insulated ferrule	0.5 ... 10 mm ²	20 ... 8 AWG
	with insulated ferrule	0.5 ... 10 mm ²	20 ... 8 AWG
2 conductors per clamp	Flexible with twin ferrule	0.5 ... 4 mm ²	20 ... 12 AWG
Rated current / Rated cross section		57 A / 10 mm ²	55 A / 6 AWG
Rated short-time withstand current (1s)		1200 A	
Short Circuit Current Rating (with specific conditions)			100 kA
Rated voltage		1000 V	600 V
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1

Increased safety Ex e

693 V 51 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/III/C

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey <input type="checkbox"/>	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey <input type="checkbox"/>	EK10	1SNK710910R0000	20	3.30
3 Jumper bars	Orange <input type="checkbox"/>	JB10-2	1SNK910302R0000	50	4.60
		JB10-3	1SNK910303R0000	50	7.10
		JB10-4	1SNK910304R0000	40	9.40
		JB10-5	1SNK910305R0000	30	12.00
		JB10-10	1SNK910310R0000	20	24.00
4 Circuit separators	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40
5 Test adapters	Dark grey <input type="checkbox"/>	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
		TP4	1SNK900205R0000	20	2.40
6 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.


Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK10	Green-yellow <input type="checkbox"/>	ZK10-PE	1SNK710150R0000	20	36.20


All the technical data for UL/CSA standard and dimensions in inches are in *italics*.




ZK16 PI-Spring terminal blocks

Feed-through - 12 mm 0.472 in spacing

2



ZK16



12 mm 0.472 in spacing

Description

Combine high performance with compact dimensions:

- 1000 V AC / DC IEC 600 V UL,
- Opt for the best marking visibility thanks to the up-front, flat marker zone, which lets you mark up to eight digits or increase the font size.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 2 connections	Grey <input type="checkbox"/>	ZK16	1SNK712010R0000	20	33.80
	Blue <input checked="" type="checkbox"/>	ZK16-BL	1SNK712020R0000	20	33.80

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 25 mm ²	20 ... 4 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 16 mm ²	20 ... 6 AWG	Wire stripping length	15 mm 0.591 in
	with non insulated ferrule	0.5 ... 16 mm ²	20 ... 6 AWG		
	with insulated ferrule	0.5 ... 16 mm ²	20 ... 6 AWG		
2 conductors per clamp	Flexible with twin ferrule	0.5 ... 6 mm ²	20 ... 10 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 4 mm Ø 0.157 in
Rated current / Rated cross section		76 A / 16 mm ²	75 A / 4 AWG		
Rated short-time withstand current (1s)		1960 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		1000 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		693 V 69 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IC/IIIC			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input checked="" type="checkbox"/>	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey <input checked="" type="checkbox"/>	EK10	1SNK710910R0000	20	3.30	
3 Jumper bars	Orange <input checked="" type="checkbox"/>	2 poles	JB12-2	1SNK912302R0000	50	4.90
		3 poles	JB12-3	1SNK912303R0000	50	7.60
		5 poles	JB12-5	1SNK912305R0000	20	12.90
4 Circuit separators	Dark grey <input checked="" type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40	
5 Test adapters	Dark grey <input checked="" type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
6 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZK16	Green-yellow <input checked="" type="checkbox"/>	ZK16-PE	1SNK712150R0000	20	47.00

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK2.5-PE PI-Spring terminal blocks


Ground - 5.2 mm 0.205 in spacing



2.5 mm²
12 AWG



ZK2.5-PE



5.2 mm 0.205 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK2.5.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 2 connections	Green-yellow	ZK2.5-PE	1SNK705150R0000	20	10.00

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG	Wire stripping length	11 mm 0.433 in
	Flexible with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated cross section		2.5 mm ²	12 AWG		
Rated short-time withstand current (1s)		300 A	396 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb I/II/C/III/C

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 5.2 mm 0.205 in	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections 2 mm 0.079 in	Dark grey	EK2.5	1SNK705910R0000	20	1.80
3 Circuit separators 3 mm 0.118 in	Dark grey	CS-R2	1SNK900106R0000	20	3.80
4 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


ZK2.5-PE-3P PI-Spring terminal blocks

Ground with 3 connections - 5.2 mm 0.205 in spacing

2



ZK2.5-PE-3P



5.2 mm 0.205 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK2.5-3P.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 3 connections	Green-yellow	ZK2.5-PE-3P	1SNK705151R0000	20	11.90

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7,5, TH 35-15
	Flexible	0.22 ... 2.5 mm ²	26 ... 12 AWG	Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated cross section		2.5 mm ²	12 AWG		
Rated short-time withstand current (1s)		300 A	396 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb IIC/IIC

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40
3 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40
4 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



All the technical data for UL/CSA standard and dimensions in inches are in italic.

ZK2.5-PE-4P PI-Spring terminal blocks

Ground with 4 connections - 5.2 mm 0.205 in spacing




2.5 mm²
12 AWG



1SNK1620320014

ZK2.5-PE-4P



5.2 mm 0.205 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK2.5-4P.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 4 connections	Green-yellow	ZK2.5-PE-4P	1SNK705152R0000	20	13.60

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 2.5 mm ²	26 ... 14 AWG	Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		Tool (for flexible conductor without ferrule)
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
Rated cross section		2.5 mm ²	12 AWG		
Rated short-time withstand current (1s)		300 A	396 A		
Protection		IP20	NEMA 1		


Explosive atmosphere classification

IM2 II 2 GD Ex eb I/II/III/C

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 5.2 mm 0.205 in	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections 2 mm 0.079 in	Dark grey	EK2.5-4P	1SNK705912R0000	20	2.70
3 Circuit separators 3 mm 0.118 in	Dark grey	CS-R3	1SNK900107R0000	20	6.40
4 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


ZK4-PE PI-Spring terminal blocks

Ground - 6 mm 0.236 in spacing

2



ZK4-PE



6 mm 0.236 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK4.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 2 connections	Green-yellow	ZK4-PE	1SNK706150R0000	20	12.60

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 6 mm ²	26 ... 10 AWG	Rail	TH 35-7,5, TH 35-15
	Flexible	0.5 ... 4 mm ²		Wire stripping length	13 mm 0.492 in
	with non insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG		
Rated cross section		4 mm ²	10 AWG		
Rated short-time withstand current (1s)		480 A	636 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb IIC/IIC

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK2.5	1SNK705910R0000	20	1.80
3 Circuit separators	Dark grey	CS-R2	1SNK900106R0000	20	3.80
4 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK4-PE-3P PI-Spring terminal blocks

Ground with 3 connections - 6 mm 0.236 in spacing




4 mm²
10 AWG



1SNK162043S0201

ZK4-PE-3P



6 mm 0.236 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK4-3P.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 3 connections	Green-yellow	ZK4-PE-3P	1SNK706151R0000	20	15.70

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 6 mm ²	26 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 4 mm ²		Wire stripping length	13 mm 0.492 in
	with non insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG		
	with insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG		
Rated cross section		4 mm ²	10 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated short-time withstand current (1s)		480 A	636 A		
Protection		IP20	NEMA 1		


Explosive atmosphere classification

IM2 II 2 GD Ex eb I/II/III/C

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40
3 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40
4 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


ZK4-PE-4P PI-Spring terminal blocks

Ground with 4 connections - 6 mm 0.236 in spacing

2



ZK4-PE-4P



6 mm 0.236 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK4-4P.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 4 connections	Green-yellow	ZK4-PE-4P	1SNK706152R0000	20	18.40


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 6 mm ²	26 ... 10 AWG	Rail	TH 35-7,5, TH 35-15
	Flexible	0.5 ... 4 mm ²	26 ... 10 AWG	Wire stripping length	13 mm 0.492 in
	with non insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG		
Rated cross section		4 mm ²	10 AWG		
Rated short-time withstand current (1s)		480 A	636 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb IIC/IIC

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 5.2 mm 0.205 in	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections 2 mm 0.079 in	Dark grey	EK2 5-4P	1SNK705912R0000	20	2.70
3 Circuit separators 3 mm 0.118 in	Dark grey	CS-R3	1SNK900107R0000	20	6.40
4 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK6-PE PI-Spring terminal blocks

Ground - 8 mm 0.315 in spacing



ZK6-PE



8 mm 0.315 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK6.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 2 connections	Green-yellow	ZK6-PE	1SNK708150R0000	20	20.30

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 8 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 6 mm ²		Wire stripping length	13 mm 0.492 in
	with non insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
Rated cross section		6 mm ²	8 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated short-time withstand current (1s)		720 A	1008 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb I/IIc/IIIc
The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 5.2 mm 0.205 in	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections 2 mm 0.079 in	Dark grey	EK2.5	1SNK705910R0000	20	1.80
3 Circuit separators 3 mm 0.118 in	Dark grey	CS-R2	1SNK900106R0000	20	3.80
4 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK6-PE-3P PI-Spring terminal blocks


Ground with 3 connections - 8 mm 0.315 in spacing

2



1SNK162062/0014

ZK6-PE-3P



8 mm 0.315 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK6-3P.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground 3 connections	Green-yellow	ZK6-PE-3P	1SNK708151R0000	20	21.50 g

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 8 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 6 mm ²	24 ... 8 AWG	Wire stripping length	13 mm 0.492 in
	with non insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
Rated cross section		6 mm ²	8 AWG		
Rated short-time withstand current (1s)		720 A	1008 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb IIC/IIIC

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK6-3P	1SNK708911R0000	20	2.80
3 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40
4 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK10-PE PI-Spring terminal blocks

Ground - 10 mm 0.394 in spacing




10 mm²
6 AWG



1SNK1620310014

ZK10-PE



10 mm 0.394 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK10.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 2 connections	Green-yellow	ZK10-PE	1SNK710150R0000	20	36.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 16 mm ²	20 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 10 mm ²	20 ... 8 AWG	Wire stripping length	15 mm 0.591 in
	with non insulated ferrule	0.5 ... 10 mm ²	20 ... 8 AWG		Tool (for flexible conductor without ferrule)
	with insulated ferrule	0.5 ... 10 mm ²	20 ... 8 AWG		
Rated cross section		10 mm ²	6 AWG		
Rated short-time withstand current (1s)		1200 A	1596 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb I/IIc/IIIc

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK10	1SNK710910R0000	20	3.30
3 Jumper bars	Orange	JB10-2	1SNK910302R0000	50	4.60
4 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40
5 Test adapters	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
	Grey	MC812PA	1SNK169999R0000	20	14.00
	White	UMH	1SNK900611R0000	10	0.20
Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

ZK16-PE PI-Spring terminal blocks

Ground - 12 mm 0.472 in spacing




16 mm²
4 AWG

2



1SNK16204650201

ZK16-PE



12 mm 0.472 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK16.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground 2 connections	Green-yellow	ZK16-PE	1SNK712150R0000	20	47.00

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 25 mm ²	20 ... 4 AWG	Rail	TH 35-7,5, TH 35-15
	Flexible	0.5 ... 16 mm ²	20 ... 4 AWG	Wire stripping length	15 mm 0.591 in
	with non insulated ferrule	0.5 ... 16 mm ²	20 ... 6 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 4 mm Ø 0.157 in
	with insulated ferrule	0.5 ... 16 mm ²	20 ... 6 AWG		
Rated cross section		16 mm ²	4 AWG		
Rated short-time withstand current (1s)		1960 A	2544 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb IIC/IIC

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK10	1SNK710910R0000	20	3.30
3 Jumper bars	Orange	JB12-2	1SNK912302R0000	50	4.90
4 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40
5 Test adapters	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.


Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




All the technical data for UL/CSA standard and dimensions in inches are in italic.

ZK2.5-S PI-Spring terminal blocks

Disconnect with blade - with test sockets - 5.2 mm 0.205 in spacing



ZK2.5-S



5.2 mm 0.205 in spacing

Description

Combine high performance with compact dimensions: 630 V IEC 300 V UL.

Secure the current measurement:

- for currents below 50 mA, thanks to 2 built in test points DIA 2 mm 0.079 in,
- for currents up to 16 A, by using the TP4 test adapter inserted into the jumper channels.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect with 2 test sockets DIA 2 mm 0.079 in	Grey	ZK2.5-S	1SNK705310R0000	50	8.10
	Blue	ZK2.5-S-BL	1SNK705320R0000	50	8.10
	Orange	ZK2.5-S-OR	1SNK705330R0000	50	8.10

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 2.5 mm²		Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 2.5 mm²	26 ... 14 AWG		
	with insulated ferrule	0.22 ... 2.5 mm²	26 ... 14 AWG		
2 conductors per clamp	with twin ferrule	0.22 ... 0.5 mm²	26 ... 20 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		20 A / 2.5 mm²	20 A / 12 AWG		
Rated short-time withstand current (1s)		300 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40	
3 Jumper bars	Orange	2 poles	JB5-2	1SNK905302R0000	50	1.30
		3 poles	JB5-3	1SNK905303R0000	50	2.00
		4 poles	JB5-4	1SNK905304R0000	50	2.70
		5 poles	JB5-5	1SNK905305R0000	50	3.50
		10 poles	JB5-10	1SNK905310R0000	30	7.10
50 poles	JB5-50	1SNK905350R0000	10	36.00		
4 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40	
5 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
6 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
7 Shield connectors		SHBP	1SNK900601R0000	20	4.10	
8 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic.

ZK2.5-S-R1 PI-Spring terminal blocks

Disconnect with blade - 6 mm 0.236 in spacing



2.5 mm²
12 AWG

Description

Simplify the distribution of circuits in marshalling cabinets thanks to our disconnect terminal blocks with the same profile as ZK2.5-SF fuse.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Disconnect Profile aligned with ZK2.5-SF	Grey <input type="checkbox"/>	ZK2.5-S-R1	1SNK706310R0000	50	8.90

Main technical data


Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp	Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule	0.2 ... 4 mm ² 0.22 ... 2.5 mm ² 0.22 ... 2.5 mm ² 0.22 ... 2.5 mm ²	26 ... 12 AWG 26 ... 14 AWG 26 ... 14 AWG	Rail	TH 35-7.5, TH 35-15
2 conductors per clamp	with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG	Wire stripping length	11 mm 0.433 in
Rated current / Rated cross section		20 A / 2.5 mm ²	20 A / 12 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated short-time withstand current (1s)		300 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



ZK2.5-S-R1



6 mm 0.236 in spacing

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops	Dark grey <input type="checkbox"/>	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey <input type="checkbox"/>	EK2.5-3P	1SNK705911R0000	20	2.40
3 Jumper bars	Orange <input type="checkbox"/>	JB6-2	1SNK906302R0000	50	1.30
		JB6-3	1SNK906303R0000	50	2.10
		JB6-4	1SNK906304R0000	50	2.90
		JB6-5	1SNK906305R0000	50	3.60
		JB6-10	1SNK906310R0000	20	7.40
		JB6-50	1SNK906350R0000	10	38.10
4 Circuit separators	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40
5 Test adapters	Dark grey <input type="checkbox"/>	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
6 Test connectors	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20
7 Spacers	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80
8 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey <input type="checkbox"/>	UMH	1SNK9000611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through	Grey <input type="checkbox"/>	ZK4-3P	1SNK706011R0000	50	11.00
Fuse	Grey, dark grey <input type="checkbox"/>	ZK2.5-SF	1SNK706410R0000	50	16.20

All the technical data for UL/CSA standard and dimensions in inches are in italic.




ZK2.5-SP PI-Spring terminal blocks

Disconnect with plug - with test sockets - 5.2 mm 0.205 in spacing




2.5 mm²
12 AWG



1SNK162038V0014

ZK2.5-SP



5.2 mm 0.205 in spacing

Description

The flexible solution for fitting the component of your choice in series with our quick-fitting PG5 component holder plug:

- compatible with components of 8.8 x 3.2 mm 0.346 x 0.125 in, such as resistors, diodes or mini axial fuses.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect with 2 test sockets DIA 2 mm 0.079 in	Grey <input type="checkbox"/>	ZK2.5-SP	1SNK705311R0000	50	11.50


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 2.5 mm ²	26 ... 12 AWG	Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
2 conductors per clamp	with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		17 A / 2.5 mm ²	18 A / 12 AWG		
Rated short-time withstand current (1s)		300 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

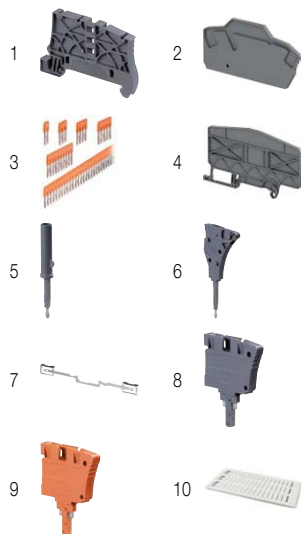

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	BAZ1	1SNK900002R0000	50	5.30	
2 End sections 2 mm 0.079 in	Dark grey <input type="checkbox"/>	EK2.5-3P	1SNK705911R0000	20	2.40	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB5-2	1SNK905302R0000	50	1.30
		3 poles	JB5-3	1SNK905303R0000	50	2.00
		4 poles	JB5-4	1SNK905304R0000	50	2.70
		5 poles	JB5-5	1SNK905305R0000	50	3.50
		10 poles	JB5-10	1SNK905310R0000	30	7.10
50 poles	JB5-50	1SNK905350R0000	10	36.00		
4 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40	
5 Test adapters	Dark grey <input type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
6 Test connectors	Dark grey <input type="checkbox"/>	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
7 Shield connectors		SHBP	1SNK900601R0000	20	4.10	
8 Component plugs	Dark grey <input type="checkbox"/>	PG5	1SNK900401R0000	20	3.50	
9 Disconnect plugs	Orange <input type="checkbox"/>	PG5-R1	1SNK900402R0000	20	3.50	
10 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK2.5-SF PI-Spring terminal blocks

For 5x20 fuses - 6 mm 0.236 in spacing



2.5 mm²
12 AWG

Description


- Protect your circuits with 5x20 fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Simplify the distribution thanks to the 2 jumper channels aligned with ZK4-3P feed-through and ZK2.5-S-R1 disconnect terminal blocks.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey, dark grey	ZK2.5-SF	1SNK706410R0000	50	16.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 2.5 mm ²	26 ... 14 AWG	Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
2 conductors per clamp	with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG		
Rated current / Rated cross section		6.3 A / 2.5 mm ²	16 A / 12 AWG		
Rated short-time withstand current (1s)					
Rated voltage		500 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

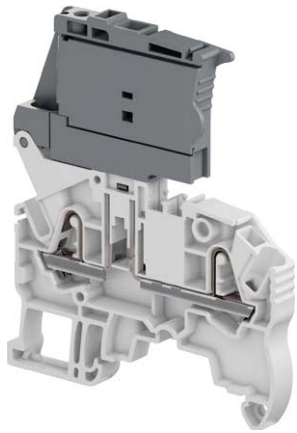

ZK2.5-SF

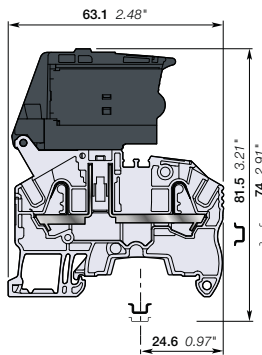


6 mm 0.236 in spacing

The fuse holder must be first disconnected prior any fuse replacement. Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	1.6 W
			Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30	
2 End sections	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40	
3 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		50 poles	JB6-50	1SNK906350R0000	10	38.10
4 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40	
5 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
6 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
7 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
		MC612	1SNK150000R0000	22	10.00	
8 Terminal block markers	White	MC612PA	1SNK159999R0000	20	11.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	


Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic.

ZK2.5-SF-R PI-Spring terminal blocks

For 5x20 fuses - with blown fuse indicator - 6 mm 0.236 in spacing

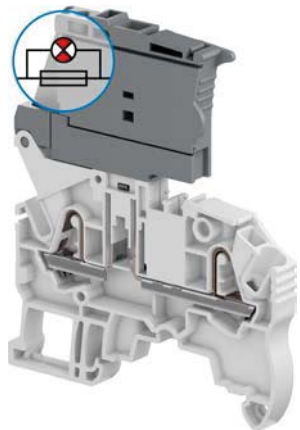

ZK2.5-SF-R

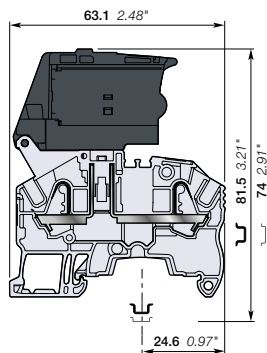

6 mm 0.236 in spacing

Description

- Protect your circuits with 5x20 fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Simplify the distribution thanks to the 2 jumper channels aligned with ZK4-3P feed-through and ZK2.5-S-R1 disconnect terminal blocks,
- Quickly identify the defective circuit thanks to the blown fuse indicator (with leakage current < 0.5 mA).

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse with blown fuse indicator 24 ... 110 V AC / DC	Grey, dark grey	ZK2.5-SF-R1	1SNK706411R0000	50	16.30
with blown fuse indicator 115 ... 250 V AC / DC		ZK2.5-SF-R3	1SNK706412R0000	50	16.30

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded Flexible	26 ... 12 AWG 26 ... 14 AWG	Rail Wire stripping length
2 conductors per clamp	with twin ferrule	26 ... 20 AWG	Tool (for flexible conductor without ferrule)
Rated current / Rated cross section	6.3 A / 2.5 mm²	16 A / 12 AWG	
Rated short-time withstand current (1s)			
Rated voltage	500 V	300 V	
Impulse withstand voltage	6000 V		
Protection	IP20	NEMA 1	

The fuse holder must be first disconnected prior any fuse replacement. Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Separate arrangement	Compound arrangement	Protection	Power
Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	2.5 W
		Exclusive short-circuit protection	4 W
		Overload and short-circuit protection	1.6 W
		Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAZ1	1SNK900002R0000	50	5.30
2 End sections	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40
3 Jumper bars	Orange	JB6-2	1SNK906302R0000	50	1.30
		JB6-3	1SNK906303R0000	50	2.10
		JB6-4	1SNK906304R0000	50	2.90
		JB6-5	1SNK906305R0000	50	3.60
		JB6-10	1SNK906310R0000	20	7.40
		JB6-50	1SNK906350R0000	10	38.10
4 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.40
5 Test adapters	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
6 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20
7 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80
8 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK2.5-D2 PI-Spring terminal blocks

Double deck with 2 feed-through circuits - 5.2 mm 0.205 in spacing



Description

Combine high performance with compact dimensions:

- 800 V IEC 600 V UL,
- 2 jumper channels and a large input and output marker zone on each deck.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Double deck 2 feed-through circuits	Grey	ZK2.5-D2	1SNK705210R0000	50	11.20
	Blue	ZK2.5-D2-BL	1SNK705220R0000	50	11.20


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG	Wire stripping length	11 mm 0.433 in
	Flexible with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm 0.138 in
	Rated current / Rated cross section		24 A / 2.5 mm ²	20 A / 12 AWG	
Rated short-time withstand current (1s)		300 A			
Short Circuit Current Rating (with specific conditions)		100 kA			
Rated voltage		800 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Increased safety Ex e 693 V 21 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb IIC/IIIC
 The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



ZK2.5-D2



5.2 mm 0.205 in spacing

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 End sections 2 mm 0.079 in	Dark grey	EK2.5-D2	1SNK705960R0000	20	3.40
3 Jumper bars 2 poles	Orange	JB5-2	1SNK905302R0000	50	1.30
		JB5-3	1SNK905303R0000	50	2.00
		JB5-4	1SNK905304R0000	50	2.70
		JB5-5	1SNK905305R0000	50	3.50
		JB5-10	1SNK905310R0000	30	7.10
		JB5-50	1SNK905350R0000	10	36.00
4 Test adapters For test plugs DIA 2 mm 0.079 in For test plugs DIA 4 mm 0.157 in	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
5 Test connectors 5.2 mm 0.205 in spacing End module, 5.2 mm 0.205 in	Dark grey	TC5	1SNK900200R0000	10	5.20
		TC5-R1	1SNK900201R0000	10	5.20
6 Shield connectors		SHB	1SNK900602R0000	20	4.90
7 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Double deck PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Double deck Profile aligned with ZK2.5-D2 and ZK2.5-D1	Green-yellow	ZK2.5-D1-PE	1SNK705250R0000	20	15.70

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.




ZK2.5-D1 PI-Spring terminal blocks

Double deck with 1 feed-through circuit - 5.2 mm 0.205 in spacing



ZK2.5-D1



5.2 mm 0.205 in spacing

Description

Find the same functionalities as ZK2.5-D2 and ease one potential distribution on 4 independent connections.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck 1 feed-through circuit	Grey	ZK2.5-D1	1SNK705211R0000	50	11.20

Main technical data

Connecting capacity		IEC	UL - CSA	Rail	TH 35-7.5, TH 35-15
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Wire stripping length	11 mm 0.433 in
	Flexible with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		24 A / 2.5 mm ²	20 A / 12 AWG		
Rated short-time withstand current (1s)		300 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		800 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		693 V 21 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IC/IIIC			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 End sections 2 mm 0.079 in	Dark grey	EK2.5-D2	1SNK705960R0000	20	3.40
3 Jumper bars 2 poles 3 poles 4 poles 5 poles 10 poles 50 poles	Orange	JB5-2	1SNK905302R0000	50	1.30
		JB5-3	1SNK905303R0000	50	2.00
		JB5-4	1SNK905304R0000	50	2.70
		JB5-5	1SNK905305R0000	50	3.50
		JB5-10	1SNK905310R0000	30	7.10
4 Test adapters For test plugs DIA 2 mm 0.079 in For test plugs DIA 4 mm 0.157 in	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
	Dark grey	TC5	1SNK900200R0000	10	5.20
5 Test connectors 5.2 mm 0.205 in spacing End module, 5.2 mm 0.205 in		TC5-R1	1SNK900201R0000	10	5.20
		SHB	1SNK900602R0000	20	4.90
6 Shield connectors		MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
		UMH	1SNK900611R0000	10	0.20
7 Terminal block markers		MG-CPM-13 41790	1SNB041790R0512	1960	0.23
		Blank marker			

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Double deck PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck Profile aligned with ZK2.5-D2 and ZK2.5-D1	Green-yellow	ZK2.5-D1-PE	1SNK705250R0000	20	15.70

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.



ZK2.5-D2-PE PI-Spring terminal blocks

Double deck with 1 feed-through circuit and 1 ground circuit

5.2 mm 0.205 in spacing




2



1SNK162079V0014

ZK2.5-D2-PE



5.2 mm 0.205 in spacing

Description

Combine high performance with compact dimensions:

- 800 V IEC 600 V UL,
- 1 feed through circuit and 1 ground circuit in just 5.2 mm 0.205 in spacing,
- 2 jumper channels and a large input and output marker zone on each deck,
- designed for easy wiring.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck 1 feed-through circuit and 1 ground circuit	Grey, Green-yellow	ZK2.5-D2-PE	1SNK705212R0000	20	15.70

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 2.5 mm ²	26 ... 14 AWG	Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG		
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG	Tool (for flexible conductor without ferrule)	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		24 A / 2.5 mm ²	20 A / 12 AWG		
Rated short-time withstand current (1s)		300 A			
Short Circuit Current Rating (with specific conditions)					
Rated voltage		800 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		693 V 21 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IC/IIIC			


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey	BZH1	1SNK900102R0000	20	24.00
2 End sections 2 mm 0.079 in	Dark grey	EK2.5-D2	1SNK705960R0000	20	3.40
3 Jumper bars 2 poles	Orange	JB5-2	1SNK905302R0000	50	1.30
		JB5-3	1SNK905303R0000	50	2.00
		JB5-4	1SNK905304R0000	50	2.70
		JB5-5	1SNK905305R0000	50	3.50
		JB5-10	1SNK905310R0000	30	7.10
		JB5-50	1SNK905350R0000	10	36.00
4 Test adapters For test plugs DIA 2 mm 0.079 in For test plugs DIA 4 mm 0.157 in	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
5 Test connectors 5.2 mm 0.205 in spacing End module, 5.2 mm 0.205 in	Dark grey	TC5	1SNK900200R0000	10	5.20
		TC5-R1	1SNK900201R0000	10	5.20
		SHB	1SNK900602R0000	20	4.90
6 Shield connectors	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
7 Terminal block markers	Grey	Blank card	1SNK900611R0000	10	0.20
		Universal wire markers holder	1SNK900611R0000	10	0.20
		Blank marker	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

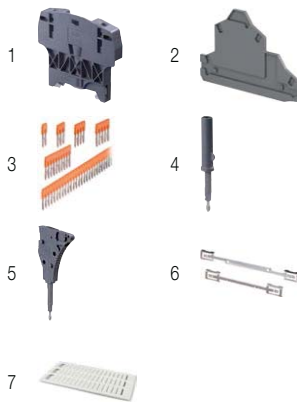

Double deck PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck	Grey	ZK2.5-D2	1SNK705210R0000	50	11.20


All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZK2.5-D1-PE PI-Spring terminal blocks

Double deck with 1 ground circuit - 5.2 mm 0.205 in spacing



ZK2.5-D1-PE



5.2 mm 0.205 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of the IEC 60947-7-2 terminal block standard,
- Secured snap on or off the rail,
- Profile aligned with ZK2.5-D2.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck 1 ground circuit	Green-yellow	ZK2.5-D1-PE	1SNK705250R0000	20	15.70

Main technical data

Connecting capacity		IEC	UL - CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	26 ... 12 AWG
	Flexible	0.22 ... 2.5 mm ²	26 ... 14 AWG
	with non insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG
	with insulated ferrule	0.22 ... 2.5 mm ²	26 ... 14 AWG
Rated cross section		2.5 mm ²	12 AWG
Rated short-time withstand current (1s)		300 A	396 A
Protection		IP20	NEMA 1

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.433 in
Tool (for flexible conductor without ferrule)		Flat screwdriver Ø 3.5 mm Ø 0.138 in

Explosive atmosphere classification

IM2 II 2 GD Ex eb I/II/C/III/C

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 End sections 2 mm 0.079 in	Dark grey	EK2.5-D2	1SNK705960R0000	20	3.40
3 Test adapters For test plugs DIA 2 mm 0.079 in For test plugs DIA 4 mm 0.157 in	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
4 Test connectors 5.2 mm 0.205 in spacing End module, 5.2 mm 0.205 in	Dark grey	TC5	1SNK900200R0000	10	5.20
		TC5-R1	1SNK900201R0000	10	5.20
5 Shield connectors		SHB	1SNK900602R0000	20	4.90
6 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops.


Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



SNK series, terminal blocks


Screw clamp technology

3

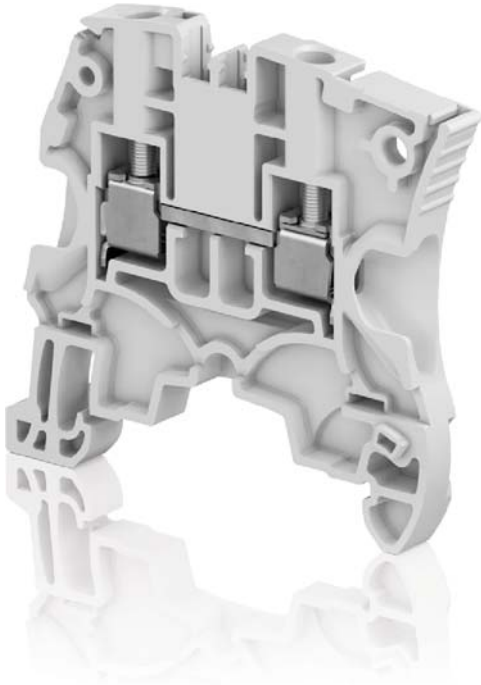

Rely on our expertise

ABB screw clamp technology benefits from 50 years of experience. Billions of our screw clamps have been manufactured and are used worldwide every day.



Qualified for worldwide markets and applications
Eco-designed according to international environmental standards in sustainable development.



A smart design to support your daily connection challenges

Revitalise your electrical installations

Modern. High quality finishing.

Improve marking visibility from any direction

Asymmetrical design offers the best visibility from any direction, +20% marking surface.

Facilitate your rail assembly process

Asymmetrical shape: easy to handle, prevents risk of short-circuit. Stiffness: improved holding adherence to the rail, low deflection when tightening. Locking pin: quick and easy to lock up to ten blocks in position at a time.

Smooth your connecting process


Engineered conductor entry: optimized conductor guiding, easier connection. One or two conductors. Conductors with or without ferrules.

Facilitate maintenance operations

Terminals can be individually removed from a terminal assembly equipped with markers: ABB markers become independent after strip mounting, ABB markers remain on terminal in any situation. Handwriting possible.



Best marking visibility from any direction

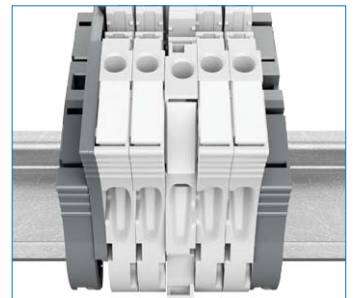

Asymmetrical design offers the best visibility




Engineered conductor entry



Maintenance operations facilitated

"Simply SNK"

Find your preferred marking solution from our universal range

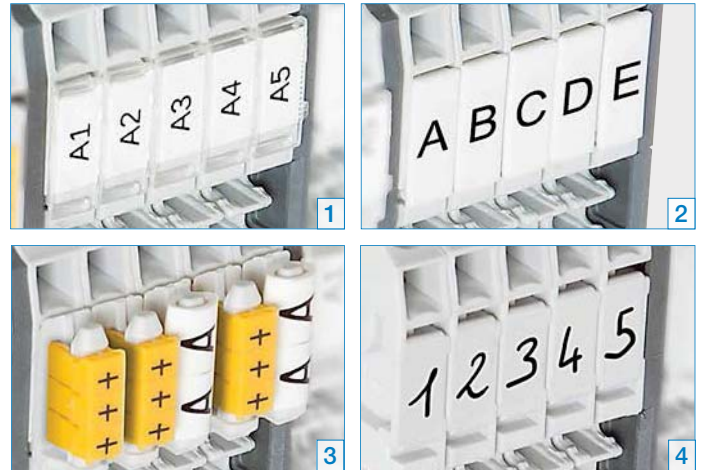

3

ABB automatic printing solutions

ABB marking systems with blank marker cards (2) and self adhesive strips (1).

ABB pre-marking solutions

Pre-printed marker cards (2).

Manual marking solutions

Universal marker holder (UMH), compatible with most of the wire markers available on the market (3). Patented "flat marking area", compatible with self-adhesive strips and can be written on with a marker pen (4).


Make savings where it counts

Reduce your stock value

Significant reduction of part numbers to manage. Less terminal blocks and accessories needed to do your electrical installation, number of units per pack suited to the usage.

Reduce marking cost

With pre-printed marker cards and strip mounting. Zero investment needed using your current tools: adhesive hand label printer, desktop printers, pen.

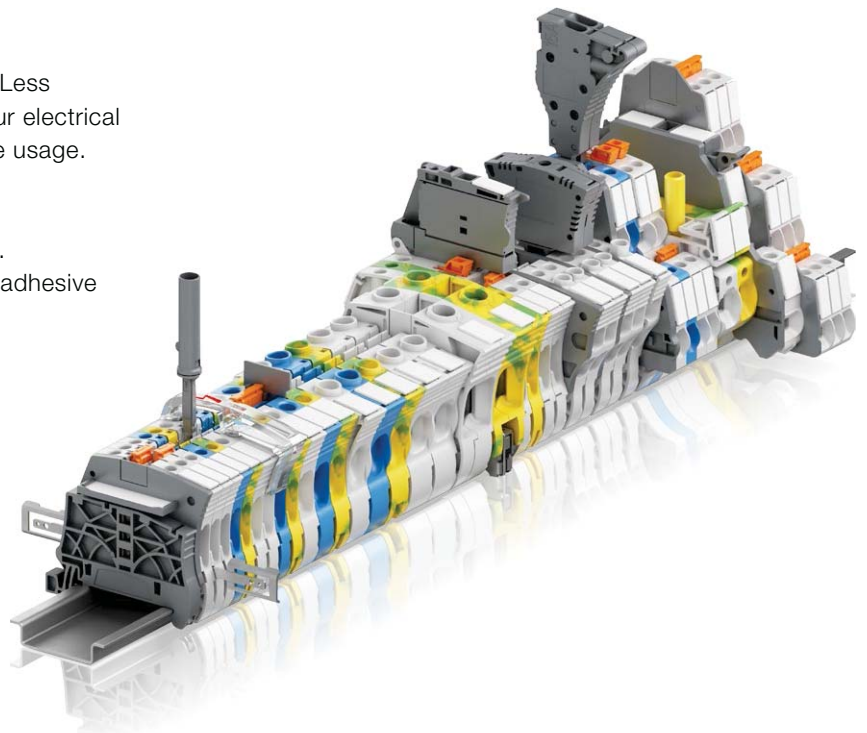

SNK series, terminal blocks

Screw clamp technology

Range overview from 2.5 to 95 mm²

3



2 Connections

Single deck
Feed-through
Ground
Disconnect
Fuse




3 Connections

Single deck
Feed-through
Ground



4 Connections

Single deck
Feed-through
Ground
Disconnect

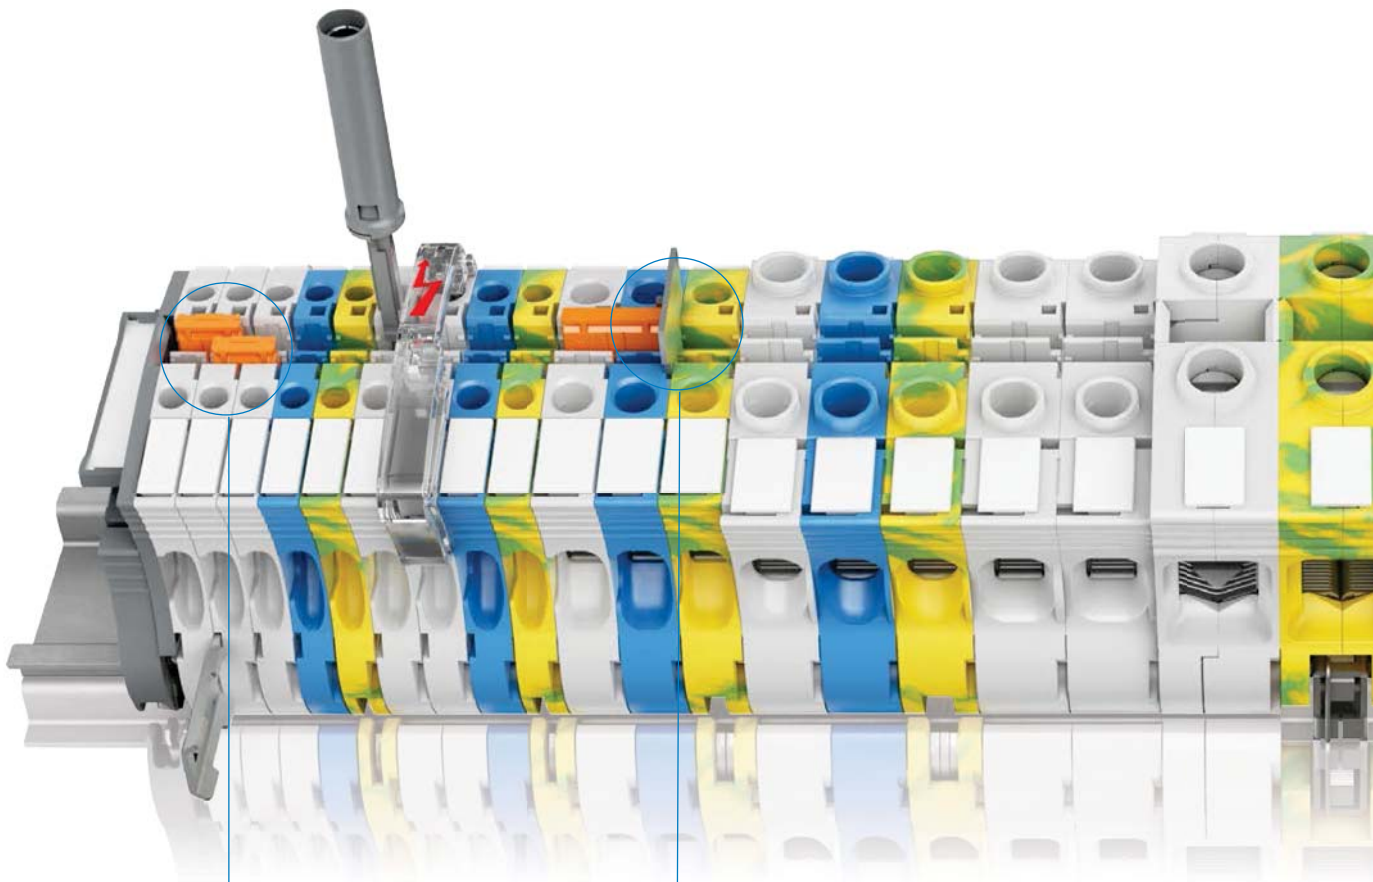

Double central channels
allows multiconfigurations
(jumping, testing and
measuring)

Circuit separator
without spacing loss



2x2 Connections

- Double deck
- Feed-through
- Ground
- Disconnect
- Fuse




2 Connections

- Test and measurement
- Feed-through
- Ground
- Disconnect



3x2 Connections

- Triple deck
- Feed-through

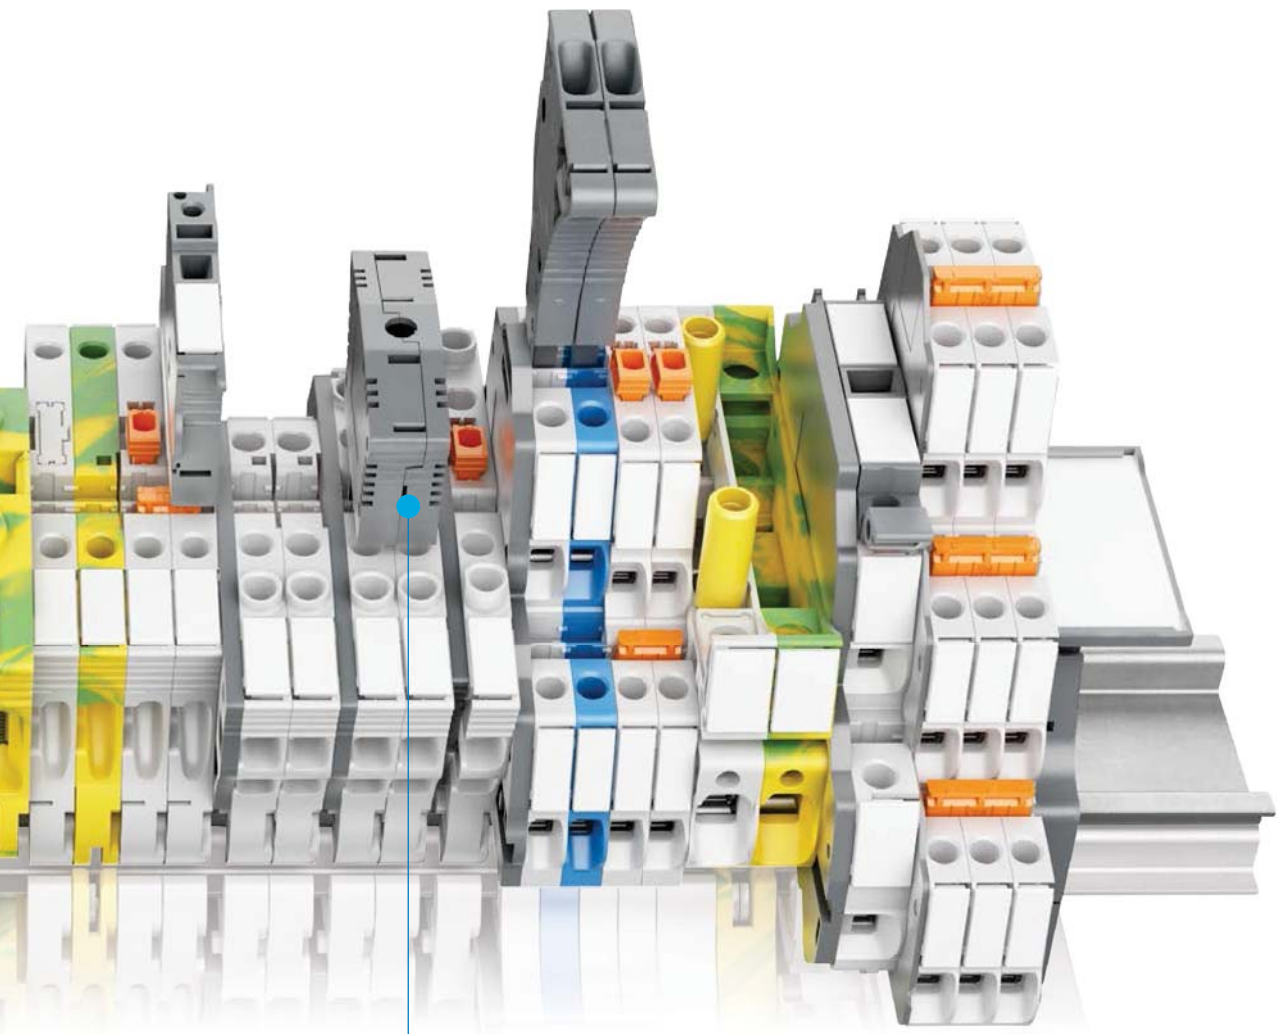

Plug
component holder

SNK series, terminal blocks

Screw clamp technology



3

Feed-through

Ground

Section									
4 mm ²	12 AWG 10 AWG	ZS4			ZS4-PE				
6 mm ²	10 AWG	ZS6	ZS6-3S	ZS6-4S		ZS6-PE	ZS6-3S-PE	ZS6-4S-PE	
10 mm ²	6 AWG	ZS10				ZS10-PE			
16 mm ²	4 AWG	ZS16				ZS16-PE			
25 mm ²	3 AWG	ZS25				ZS25-PE			
35 mm ²	0 AWG 2 AWG				ZS35				ZS35-PE
50 mm ²	0 AWG				[New] ZS50				[New] ZS50-PE
70 mm ²	00 AWG				ZS70				ZS70-PE
95 mm ²	0000 AWG				ZS95				ZS95-PE



Disconnect with blade

Disconnect with plug

Section										
4 mm ²	10 AWG	ZS4-S	ZS4-S-T2		ZS4-S-R1	ZS4-S-T2-R1 ZS4-S-T2.3-R1	ZS4-SP	ZS4-SP-T2	ZS4-SP-R1	ZS4-SP-T2-R1
6 mm ²	10 AWG	ZS6-S		ZS6-S-4S-T2						
10 mm ²	6 AWG	ZS10-S					ZS10-SP			



For 5 x 20 mm fuses

Aligned for marshalling cabinets application


For 6.3 x 32 mm fuses (1/4 x 1 1/4 in)

Aligned

Section											
4 mm ²	10 AWG	ZS4-SF	ZS4-SF-T2	ZS4-SF-R1	ZS4-SF-R2	ZS4-R2	ZS4-PE-R2	ZS4-S-R2			
				ZS4-SF-R3	ZS4-SF-R4						
10 mm ²	6 AWG								ZS10-SF	ZS10-SF-R1 ZS10-SF-R3	ZS10-S-R2

Clamp - Channels for jumpering or testing - Test socket - Blown-fuse indicator

1SNK161066S0201



Double deck				Triple deck				
Feed-through		Ground		Disconnect with blade		For 5 x 20 mm and 5 x 25 mm fuses		Feed-through
ZS4-D2	ZS4-D1	ZS6-D2-PE	ZS6-D1-PE	ZS4-D2-S	ZS4-D2-S-T2	ZS4-D2-SF1	ZS4-D2-SF1-R1 ZS4-D2-SF-R3	ZS4-T3
ZS6-D2	ZS6-D1							ZS4-T3-R1



Test & measurement			
Test disconnect with sliding link		Aligned with ZS10-ST	
ZS10-ST	ZS10-ST-T4 ZS10-ST-1	ZS10-R1	ZS10-PE-R1




For 5 x 20 mm and 5 x 25 mm fuses				Feed-through aligned with ZS4-SF1	
ZS4-SF1	ZS4-SF1-T2	ZS4-SF1-R1 ZS4-SF1-R3	ZS4-SF1-R2 ZS4-SF1-R4	ZS4-R1	ZS4-S-R3

All the technical data for UL/CSA standard and dimensions in inches are in italic.


ZS4 screw clamp terminal blocks

Feed-through - 5.2 mm 0.205 in spacing



1SNK161001F0014

ZS4



5.2 mm 0.205 in spacing

Description

- Save space by connecting conductors up to 4 mm² (without insulated ferrule, CB certified) 12 AWG in just 5.2 mm 0.205 in spacing,
- Perfectly adapted to solar applications: voltage is rated 1000 V AC / DC IEC.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	ZS4	1SNK505010R0000	50	8.80
	Blue	ZS4-BL	1SNK505020R0000	50	8.80
	Orange	ZS4-OR	1SNK505030R0000	50	8.80
	Yellow	ZS4-YL	1SNK505060R0000	50	8.80
	Green	ZS4-GN	1SNK505061R0000	50	8.80
	Red	ZS4-RD	1SNK505062R0000	50	8.80
	Purple	ZS4-PR	1SNK505063R0000	50	8.80
	Brown	ZS4-BR	1SNK505064R0000	50	8.80
	White	ZS4-WH	1SNK505065R0000	50	8.80
	Black	ZS4-BK	1SNK505066R0000	50	8.80

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 12 AWG
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG
Gauge	A3-B3		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG
Rated current / Rated cross section	32 A / 4 mm ²	20 A / 12 AWG	
Rated short-time withstand current (1s)	480 A		
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage	1000 V	600 V	
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	
Increased safety Ex e	693 V 32 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/IIIc - 600 V 20 A UL 60079-7 - Class I, Zone I, AEx e II		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g		
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00		
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20		
3 Jumper bars	Orange	2 poles	JB5-2	1SNK905302R0000	50	1.30	
		3 poles	JB5-3	1SNK905303R0000	50	2.00	
		4 poles	JB5-4	1SNK905304R0000	50	2.70	
		5 poles	JB5-5	1SNK905305R0000	50	3.50	
		10 poles	JB5-10	1SNK905310R0000	30	7.10	
		50 poles	JB5-50	1SNK905350R0000	10	36.00	
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80		
5 Circuit separators	Dark grey	0 mm	CS	1SNK900101R0000	20	0.20	
		3 mm	CS-R1	1SNK900103R0000	20	5.20	
6 Test adapters	Dark grey	For test plugs DIA 2 mm	TP2	1SNK900203R0000	20	1.70	
		For test plugs DIA 4 mm	TP4	1SNK900205R0000	20	2.40	
7 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20	
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20	
			SHBS	1SNK900600R0000	20	3.50	
8 Shield connectors	Transparent	PL5	1SNK900618R0000	10	1.50		
9 Protecting covers	White	5.2 mm 0.205 in spacing	MC512	1SNK140000R0000	22	9.00	
			MC512PA	1SNK149999R0000	20	10.00	
10 Terminal block markers	Grey	Universal wire markers holder	UMH	1SNK900611R0000	10	0.20	
		Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	ZS4-PE	1SNK505150R0000	20	12.10

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Technical data valid for copper conductors only.


ZS6 screw clamp terminal blocks

Feed-through - 6 mm 0.236 in spacing




1SNK161011F0014

ZS6



6 mm 0.236 in spacing

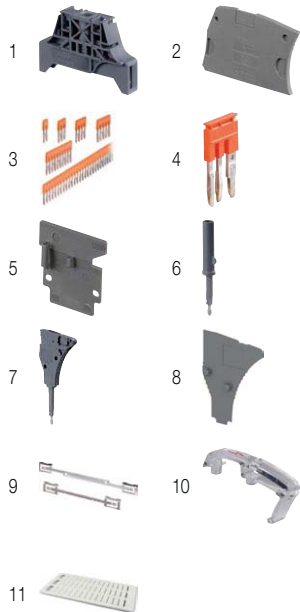

Description

- Save space by connecting conductors up to 6 mm² (without insulated ferrule, CB certified) 10 AWG in just 6 mm 0.236 in spacing,
- Perfectly adapted to solar applications: voltage is rated 1000 V AC / DC IEC.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	ZS6	1SNK506010R0000	50	10.60
	Blue	ZS6-BL	1SNK506020R0000	50	10.60
	Orange	ZS6-OR	1SNK506030R0000	50	10.60
	Yellow	ZS6-YL	1SNK506060R0000	50	10.60
	Green	ZS6-GN	1SNK506061R0000	50	10.60
	Red	ZS6-RD	1SNK506062R0000	50	10.60
	Purple	ZS6-PR	1SNK506063R0000	50	10.60
	Brown	ZS6-BR	1SNK506064R0000	50	10.60
	White	ZS6-WH	1SNK506065R0000	50	10.60
	Black	ZS6-BK	1SNK506066R0000	50	10.60

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.412 in
	Flexible with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Gauge	A4-B3		Torque	0.85 N.m ± 0.15 7.52 lb.in ± 1.33
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Flexible with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		41 A / 6 mm ²	30 A / 10 AWG		
Rated short-time withstand current (1s)		720 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		1000 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Increased safety Ex e 693 V 41 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/IIIc - 600 V 30 A UL 60079-7 - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20	
3 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		50 poles	JB6-50	1SNK906350R0000	10	38.10
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	0 mm	CS	1SNK900101R0000	20	0.20
		3 mm	CS-R1	1SNK900103R0000	20	5.20
		For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
6 Test adapters	Dark grey	For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
8 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
9 Shield connectors		SHBS	1SNK900600R0000	20	3.50	
10 Protecting covers	Transparent	PL6	1SNK900619R0000	10	1.80	
11 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Ground screw clamp terminal blocks



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	ZS6-PE	1SNK506150R0000	20	13.70

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.


Technical data valid for copper conductors only.

ZS6-3S screw clamp terminal blocks

Feed-through with 3 connections - 6 mm 0.236 in spacing



ZS6-3S



6 mm 0.236 in spacing

Description

- Recommended for energy markets and highly demanding applications requiring that only one conductor be connected per clamp,
- These blocks offer a high density connecting capacity (up to 3 connections) in a low profile and just 6 mm 0.236 in spacing.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	ZS6-3S	1SNK506011R0000	50	11.80
	Blue	ZS6-3S-BL	1SNK506021R0000	50	11.80
	Yellow	ZS6-3S-YL	1SNK506067R0000	50	11.80

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 6 mm ²		Wire stripping length	11 mm 0.413 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Flexible	0.2 ... 2.5 mm ²			
	with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		32 A / 4 mm ²	30 A / 10 AWG	Torque	0.75 N.m ± 0.05 6.64 lb.in ± 0.443
Maximum current / Maximum cross section		39 A / 6 mm ²			
Rated short-time withstand current (1s)		480 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		800 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		550 V 29 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IIIC			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES6-3S	1SNK505912R0000	20	2.50	
3 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		50 poles	JB6-50	1SNK906350R0000	10	38.10
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	0 mm	CS	1SNK900101R0000	20	0.20
		3 mm	CS-R1	1SNK900103R0000	20	5.20
6 Test adapters	Dark grey	For test plugs DIA 2 mm	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
8 Spacers	Dark grey	0.8 mm	ES-TC6	1SNK900105R0000	10	0.80
		Blank card	White	MC612	1SNK150000R0000	22
9 Terminal block markers	Grey	MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey	UMH	1SNK900061R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.


Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	ZS6-3S-PE	1SNK506151R0000	25	16.20


All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

ZS6-4S screw clamp terminal blocks

Feed-through with 4 connections - 6 mm 0.236 in spacing



ZS6-4S



6 mm 0.236 in spacing

Description

- High density wiring (one potential distribution on 4 independent screw clamps) in a very low profile and just 6 mm 0.236 in spacing,
- Recommended for energy markets and highly demanding applications requiring that only one conductor be connected per clamp.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	ZS6-4S	1SNK506012R0000	50	15.00
	Blue	ZS6-4S-BL	1SNK506022R0000	50	15.00
	Yellow	ZS6-4S-YL	1SNK506068R0000	50	15.00


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 6 mm ²		Wire stripping length	11 mm 0.413 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A4-B3		Torque	0.75 N.m ± 0.05 6.64 lb.in ± 0.443
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Flexible	0.2 ... 2.5 mm ²			
with twin ferrule		0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		32 A / 4 mm ²	30 A / 10 AWG		
Maximum current / Maximum cross section		39 A / 6 mm ²			
Rated short-time withstand current (1s)		480 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		800 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		550 V 29 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/III C			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

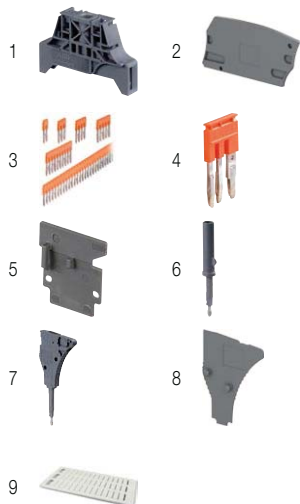

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES6-4S	1SNK505911R0000	20	3.10	
3 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		50 poles	JB6-50	1SNK906350R0000	10	38.10
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	0 mm	CS	1SNK900101R0000	20	0.20
		3 mm	CS-R1	1SNK900103R0000	20	5.20
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
8 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
9 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	ZS6-4S-PE	1SNK506152R0000	25	19.40

All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.



ZS10 screw clamp terminal blocks

Feed-through - 8 mm 0.315 in spacing




10 mm²
6 AWG



1SNK161008F0014

ZS10



8 mm 0.315 in spacing

Description

- Save space by connecting conductors up to 10 mm² (without insulated ferrule, CB certified) 6 AWG in just 8 mm 0.315 in spacing,
- Perfectly adapted to solar applications: voltage is rated 1000 V AC / DC IEC.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	ZS10	1SNK508010R0000	50	14.10
	Blue	ZS10-BL	1SNK508020R0000	50	14.10
	Orange	ZS10-OR	1SNK508030R0000	50	14.10
	Yellow	ZS10-YL	1SNK508060R0000	50	14.10
	Green	ZS10-GN	1SNK508061R0000	50	14.10
	Red	ZS10-RD	1SNK508062R0000	50	14.10
	Purple	ZS10-PR	1SNK508063R0000	50	14.10
	Brown	ZS10-BR	1SNK508064R0000	50	14.10
	White	ZS10-WH	1SNK508065R0000	50	14.10
	Black	ZS10-BK	1SNK508066R0000	50	14.10

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7,5, TH 35-15
	Flexible with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG	Wire stripping length	12 mm 0.472 in
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
	Gauge	A5-B5			
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Flexible with twin ferrule	0.5 ... 4 mm ²	20 ... 12 AWG		
		0.5 ... 4 mm ²	20 ... 12 AWG		
Rated current / Rated cross section		57 A / 10 mm ²	42 A / 6 AWG	Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Rated short-time withstand current (1s)		1200 A	100 kA		
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		1000 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		693 V 57 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb III/IIIC - 600 V 42 A UL 60079-7 - Class I, Zone I, AEx e II			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20	
3 Jumper bars	Orange	2 poles	JB8-2	1SNK908302R0000	50	2.70
		3 poles	JB8-3	1SNK908303R0000	50	4.10
		4 poles	JB8-4	1SNK908304R0000	50	5.60
		5 poles	JB8-5	1SNK908305R0000	40	7.00
		10 poles	JB8-10	1SNK908310R0000	20	14.20
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	0 mm	CS	1SNK900101R0000	20	0.20
		3 mm	CS-R1	1SNK900103R0000	20	5.20
6 Test adapters	Dark grey	For test plugs DIA 2 mm	TP2	1SNK900203R0000	20	1.70
		0.079 in	TP4	1SNK900205R0000	20	2.40
		For test plugs DIA 4 mm				
7 Test connectors	Dark grey	5.2 mm	TC5	1SNK900200R0000	10	5.20
		0.205 in spacing	TC5-R1	1SNK900201R0000	10	5.20
8 Spacers	Dark grey	2.8 mm	ES-TC8	1SNK900104R0000	10	1.40
		0.110 in	PL8	1SNK900620R0000	10	2.60
9 Protecting covers	Transparent	PL8	1SNK900620R0000	10	2.60	
10 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
		White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	ZS10-PE	1SNK508150R0000	20	22.50

All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

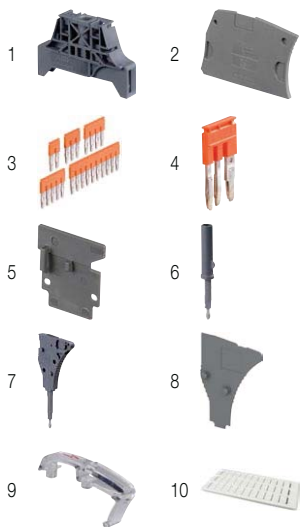

ZS16 screw clamp terminal blocks

Feed-through - 10 mm 0.394 in spacing




16 mm²
4 AWG



1SNK161006R0014

ZS16



10 mm 0.394 in spacing

Description

- Save space by connecting conductors up to 16 mm² (without insulated ferrule, CB certified) 4 AWG in just 10 mm 0.394 in spacing,
- Perfectly adapted to solar applications: voltage is rated 1000 V AC / DC IEC.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	ZS16	1SNK510010R0000	25	20.20
	Blue	ZS16-BL	1SNK510020R0000	25	20.20
	Orange	ZS16-OR	1SNK510030R0000	25	20.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 16 mm ²	24 ... 4 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 16 mm ²		Wire stripping length	14 mm 0.531 in
	with non insulated ferrule	0.5 ... 16 mm ²	24 ... 4 AWG		
	with insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 6 mm ²	20 ... 10 AWG	Tool	Flat screwdriver Ø 5.5 mm Ø 0.217 in
	Flexible	0.5 ... 6 mm ²			
	with twin ferrule	0.5 ... 6 mm ²	20 ... 10 AWG		
Rated current / Rated cross section		76 A / 16 mm ²	67 A / 4 AWG	Torque	1.8 N.m ± 0.2 15.9 lb.in ± 1.77
Rated short-time withstand current (1s)		1920 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		1000 V	600 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Increased safety Ex e 693 V 76 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/IIIc - 600 V 67 A UL 60079-7 - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20	
3 Jumper bars	Orange	2 poles	JB10-2	1SNK910302R0000	50	4.60
		3 poles	JB10-3	1SNK910303R0000	50	7.10
		4 poles	JB10-4	1SNK910304R0000	40	9.40
		5 poles	JB10-5	1SNK910305R0000	30	12.00
		10 poles	JB10-10	1SNK910310R0000	20	24.00
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	0 mm	CS	1SNK900101R0000	20	0.20
		3 mm	CS-R1	1SNK900103R0000	20	5.20
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Protecting covers	Transparent	10 mm 0.394 in spacing	PL10	1SNK900621R0000	10	3.10
8 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	ZS16-PE	1SNK510150R0000	20	32.00

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.


Technical data valid for copper conductors only.

ZS25 screw clamp terminal blocks

Feed-through - 12 mm 0.472 in spacing




25 mm²
3 AWG



1SNK161081V0014

ZS25



12 mm 0.472 in spacing

Description

- Save space by connecting conductors up to 25 mm² (without insulated ferrule, CB certified) 3 AWG in just 12 mm 0.472 in spacing,
- Perfectly adapted to solar applications: voltage is rated 1000 V AC / DC IEC.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey <input type="checkbox"/>	ZS25	1SNK512010R0000	25	21.40
	Blue <input type="checkbox"/>	ZS25-BL	1SNK512020R0000	25	21.40
	Yellow <input type="checkbox"/>	ZS25-YL	1SNK512060R0000	25	21.40

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 25 mm ²	24 ... 3 AWG
	Flexible	0.5 ... 25 mm ²	
	with non insulated ferrule	0.5 ... 16 mm ²	24 ... 4 AWG
	with insulated ferrule	0.5 ... 16 mm ²	24 ... 8 AWG
Gauge	A6-B6		
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	20 ... 10 AWG
	Flexible	0.5 ... 10 mm ²	
	with twin ferrule	0.5 ... 10 mm ²	20 ... 10 AWG
Rated current / Rated cross section	76 A / 16 mm ²	100 A / 3 AWG	
Maximum current / Maximum cross section	101 A / 25 mm ²		
Rated short-time withstand current (1s)	1920 A		
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage	1000 V	600 V	
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	
Increased safety Ex e	693 V 69 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb III/IIIC		


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20	
3 Jumper bars	Orange	2 poles	JB12-2	1SNK912302R0000	50	4.90
		3 poles	JB12-3	1SNK912303R0000	50	7.60
		5 poles	JB12-5	1SNK912305R0000	20	12.90
4 Cross spacing jumpers	Orange	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators	Dark grey	0 mm	CS	1SNK900101R0000	20	0.20
		3 mm	CS-R1	1SNK900103R0000	20	5.20
6 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Protecting covers	Transparent	PL10	1SNK900621R0000	10	3.10	
8 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

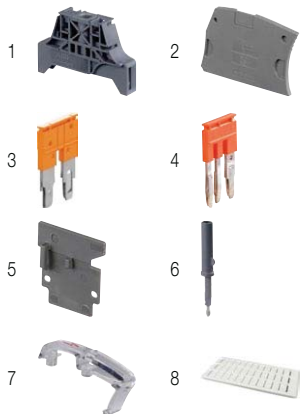

Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZS25	Green-yellow	ZS25-PE	1SNK512150R0000	20	38.00

All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.


ZS35 screw clamp terminal blocks

Feed-through - 16 mm 0.630 in spacing



1SNK161004F0014

ZS35



16 mm 0.630 in spacing

Description

Closed terminal block:

- No end section needed,
- Optimized rigidity,
- Perfectly adapted to solar applications: voltage is rated 1000 V AC / DC IEC.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Closed block	Grey <input type="checkbox"/>	ZS35	1SNK516010R0000	20	53.40
	Blue <input type="checkbox"/>	ZS35-BL	1SNK516020R0000	20	53.40
	Orange <input type="checkbox"/>	ZS35-OR	1SNK516030R0000	20	53.40

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	6 ... 35 mm ²	10 ... 0 AWG
	Flexible	6 ... 35 mm ²	10 ... 0 AWG
	with non insulated ferrule	4 ... 35 mm ²	10 ... 2 AWG
	with insulated ferrule	4 ... 35 mm ²	10 ... 2 AWG
Gauge		A9-B9	
2 conductors per clamp	Rigid - Solid / Stranded	6 ... 16 mm ²	10 ... 6 AWG
	Flexible	6 ... 16 mm ²	10 ... 6 AWG
	with twin ferrule	4 ... 10 mm ²	12 ... 8 AWG
Rated current / Rated cross section		125 A / 35 mm ²	150 A / 0 AWG
Rated short-time withstand current (1s)		4200 A	
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage		1000 V	
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1

Increased safety Ex e 693 V 125 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IIIC - 600 V 150 A UL 60079-7 - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00	
2 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB16-2	1SNK916302R0000	10	10.00
		3 poles	JB16-3	1SNK916303R0000	10	16.00
		4 poles	JB16-4	1SNK916304R0000	10	22.00
		5 poles	JB16-5	1SNK916305R0000	10	28.00
		10 poles	JB16-10	1SNK916310R0000	10	56.60
3 Circuit separators	Dark grey <input type="checkbox"/>	CS-R1	1SNK900103R0000	20	5.20	
4 Protecting covers	Transparent <input type="checkbox"/>	PL16	1SNK900622R0000	10	4.60	
5 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00	
	White <input type="checkbox"/>	MC812PA	1SNK169999R0000	20	14.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screw rail connection	Green-yellow <input type="checkbox"/>	ZS35-PE	1SNK516150R0000	20	81.80

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

Technical data valid for copper conductors only.


ZS50 screw clamp terminal blocks

Feed-through - 16 mm 0.630 in spacing



1SNK16108AV0014

ZS50



16 mm 0.630 in spacing

Description

Combine high performance with compact dimensions:

- Connect conductors up to 50 mm² (CB certified) 0 AWG in just 16 mm 0.630 in spacing,
- Perfectly adapted to solar applications: 1250 V DC (1000 V AC) IEC and 1000 V UL,
- Closed terminal block: no end section needed, optimized rigidity.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Closed block	Grey <input type="checkbox"/>	ZS50	1SNK516011R0000	20	52.90
	Blue <input type="checkbox"/>	ZS50-BL	1SNK516021R0000	20	52.90
	Yellow <input type="checkbox"/>	ZS50-YL	1SNK516060R0000	20	52.90

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	1 ... 50 mm ²	18 ... 0 AWG
	Flexible	1 ... 50 mm ²	18 ... 0 AWG
	with non insulated ferrule	1 ... 50 mm ²	18 ... 0 AWG
	with insulated ferrule	1 ... 50 mm ²	18 ... 0 AWG
Gauge	Dia.11		
2 conductors per clamp	Rigid - Solid / Stranded	1 ... 25 mm ²	18 ... 4 AWG
	Flexible	1 ... 25 mm ²	18 ... 4 AWG
	with twin ferrule	1 ... 16 mm ²	18 ... 4 AWG
Rated current / Rated cross section	150 A / 50 mm ²	140 A / 0 AWG	
Rated short-time withstand current (1s)	6000 A		
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage	1000 V	1000 V	
Impulse withstand voltage	8000 V		
Protection	IP10	NEMA 1	
Increased safety Ex e	880 V 150 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IIIC		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00	
2 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB16-2	1SNK916302R0000	10	10.00
		3 poles	JB16-3	1SNK916303R0000	10	16.00
		4 poles	JB16-4	1SNK916304R0000	10	22.00
		5 poles	JB16-5	1SNK916305R0000	10	28.00
		10 poles	JB16-10	1SNK916310R0000	10	56.60
3 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZS50	Green-yellow <input type="checkbox"/>	ZS50-PE	1SNK516151R0000	20	83.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.


Technical data valid for copper conductors only.

ZS70 screw clamp terminal blocks

Feed-through - 22 mm 0.866 in spacing



ZS70



22 mm 0.866 in spacing

Description

Closed terminal block:

- No end section needed,
- Optimized rigidity,
- Perfectly adapted to solar applications: 1250 V DC (1000 V AC) IEC and 1000 V UL.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Closed block	Grey <input type="checkbox"/>	ZS70	1SNK522010R0000	10	158.10
	Blue <input type="checkbox"/>	ZS70-BL	1SNK522020R0000	10	158.10
	Yellow <input type="checkbox"/>	ZS70-YL	1SNK522060R0000	10	158.10

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	16 ... 95 mm ²	4 ... 00 AWG
	Flexible	16 ... 70 mm ²	
	with non insulated ferrule	16 ... 50 mm ²	
	with insulated ferrule	16 ... 50 mm ²	
Gauge	B11		
2 conductors per clamp	Rigid - Solid / Stranded	16 ... 35 mm ²	4 ... 2 AWG
	Flexible	16 ... 35 mm ²	
	with twin ferrule	16 mm ²	6 AWG
Rated current / Rated cross section	192 A / 70 mm ²	159 A / 00 AWG	
Rated short-time withstand current (1s)	8400 A		
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage	1000 V	1000 V	
Impulse withstand voltage	8000 V		
Protection	IP10	NEMA 1	

Increased safety Ex e 693 V 192 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IIIC - 600 V 159 A UL 60079-7 - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00
2 Jumper bars		JB22-2	1SNK922302R0000	5	27.00
		JB22-3	1SNK922303R0000	5	43.30
		JB22-5	1SNK922305R0000	5	76.10
		JB22-10	1SNK922310R0000	5	157.40
3 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screw rail connection	Green-yellow <input type="checkbox"/>	ZS70-PE	1SNK522150R0000	10	222.00

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.


Technical data valid for copper conductors only.

ZS95 screw clamp terminal blocks

Feed-through - 26 mm 1.024 in spacing



ZS95



26 mm 1.024 in spacing

Description

Closed terminal block:

- No end section needed,
- Optimized rigidity,
- Perfectly adapted to solar applications: 1250 V DC (1000 V AC) IEC and 1000 V UL.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through Closed block	Grey <input type="checkbox"/>	ZS95	1SNK526010R0000	10	215.10
	Blue <input type="checkbox"/>	ZS95-BL	1SNK526020R0000	10	215.10
	Yellow <input type="checkbox"/>	ZS95-YL	1SNK526060R0000	10	215.10

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	35 ... 120 mm ²	2 ... 0000 AWG
	Flexible	35 ... 95 mm ²	
	with non insulated ferrule	35 ... 50 mm ²	
	with insulated ferrule	35 ... 50 mm ²	
Gauge	B12		
2 conductors per clamp	Rigid - Solid / Stranded	25 ... 35 mm ²	4 ... 2 AWG
	Flexible	25 ... 35 mm ²	
	with twin ferrule	16 mm ²	6 AWG
Rated current / Rated cross section	232 A / 95 mm ²	230 A / 0000 AWG	
Rated short-time withstand current (1s)	11400 A		
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage	1000 V	1000 V	
Impulse withstand voltage	8000 V		
Protection	IP10	NEMA 1	
Increased safety Ex e	693 V 232 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/III - 600 V 230 A UL 60079-7 - Class I, Zone I, AEx e II		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00
2 Jumper bars		JB26-2	1SNK926302R0000	5	41.20
		JB26-3	1SNK926303R0000	5	65.70
		JB26-5	1SNK926305R0000	5	115.70
		JB26-10	1SNK926310R0000	5	241.50
3 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Ground screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground Screw rail connection	Green-yellow <input type="checkbox"/>	ZS95-PE	1SNK526150R0000	10	278.00

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.


Technical data valid for copper conductors only.

ZS4-PE screw clamp terminal blocks

Ground - 5.2 mm 0.205 in spacing




4 mm²
12 AWG



1SNK161019C0014

ZS4-PE



5.2 mm 0.205 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of IEC 60947-7-2 terminal block standard,
- Secured snap on or remove from the rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screwless rail connection	Green-yellow	ZS4-PE	1SNK505150R0000	20	12.10

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²		Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Gauge		A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated cross section		4 mm ²	12 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated short-time withstand current (1s)		480 A	396 A		
Protection		IP20	NEMA 1		

Explosive atmosphere classification

IM2 II 2 GD Ex eb I/IIIC - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20
3 Circuit separators	Dark grey	CS-R1	1SNK900103R0000	20	5.20
4 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23


Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




ZS6-PE screw clamp terminal blocks

Ground - 6 mm 0.236 in spacing



ZS6-PE



6 mm 0.236 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of IEC 60947-7-2 terminal block standard,
- Secured snap on or remove from the rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground Screwless rail connection	Green-yellow	ZS6-PE	1SNK506150R0000	20	13.70

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp			
Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail
Flexible	0.2 ... 6 mm ²		Wire stripping length
with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool
with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Torque
Gauge	A4-B3		
Rated cross section	6 mm ²	10 AWG	
Rated short-time withstand current (1s)	720 A	636 A	
Protection	IP20	NEMA 1	

Explosive atmosphere classification IM2 II 2 GD Ex eb III/IIIC - Class I, Zone I, AEx e II


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey	ES4	1SNK505910R0000	20	2.20
3 Circuit separators 3 mm 0.118 in	Dark grey	CS-R1	1SNK900103R0000	20	5.20
4 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS6-3S-PE screw clamp terminal blocks


Ground with 3 connections - 6 mm 0.236 in spacing



6 mm²
10 AWG



ZS6-3S-PE



6 mm 0.236 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- rail contact non operator dependent, secured snap on or off the rail,
- Same profile as ZS6-3S for aligned marking and identical end section.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screwless rail connection	Green-yellow	ZS6-3S-PE	1SNK506151R0000	25	16.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 6 mm ²		Wire stripping length	11 mm 0.413 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
Gauge		A4-B3		Torque	0.75 N.m ± 0.05 6.64 lb.in ± 0.443
Rated cross section		4 mm ²	10 AWG		
Maximum cross section		6 mm ²			
Rated short-time withstand current (1s)		480 A	636 A		
Maximum short-time withstand current (1s)		480 A			
Protection		IP20	NEMA 1		
Explosive atmosphere classification		IM2 II 2 GD Ex eb I/IIIC			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections	Dark grey	ES6-3S	1SNK506912R0000	20	2.50
3 Circuit separators	Dark grey	CS-R1	1SNK900103R0000	20	5.20
4 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




ZS6-4S-PE screw clamp terminal blocks

Ground with 4 connections - 6 mm 0.236 in spacing



ZS6-4S-PE



6 mm 0.236 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- rail contact non operator dependent, secured snap on or off the rail,
- Same profile as ZS6-4S for aligned marking and identical end section.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground Screwless rail connection	Green-yellow	ZS6-4S-PE	1SNK506152R0000	25	19.40

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22... 6 mm ²		Wire stripping length	11 mm 0.413 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Torque	0.75 N.m ± 0.05 6.64 lb.in ± 0.443
Gauge	A4-B3				
Rated cross section	4 mm ²	10 AWG			
Maximum cross section	6 mm ²				
Rated short-time withstand current (1s)	480 A	636 A			
Maximum short-time withstand current (1s)	480 A				
Protection	IP20	NEMA 1			
Explosive atmosphere classification	IM2 II 2 GD Ex eb I/II/III				

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey	ES6-4S	1SNK505911R0000	20	3.10
3 Circuit separators 3 mm 0.118 in	Dark grey	CS-R1	1SNK900103R0000	20	5.20
4 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS10-PE screw clamp terminal blocks

Ground - 8 mm 0.315 in spacing



ZS10-PE



8 mm 0.315 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of IEC 60947-7-2 terminal block standard,
- Secured snap on or remove from the rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screwless rail connection	Green-yellow	ZS10-PE	1SNK508150R0000	20	22.50

Main technical data

Connecting capacity		IEC	UL - CSA	Rail	TH 35-15
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Wire stripping length	12 mm 0.472 in
	Flexible	0.5 ... 10 mm ²	24 ... 6 AWG		
	with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 8 AWG		
Gauge	A5-B5			Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Rated cross section	10 mm ²	6 AWG			
Rated short-time withstand current (1s)	1200 A	1596 A			
Protection	IP20	NEMA 1			

Explosive atmosphere classification

IM2 II 2 GD Ex eb I/IIIC - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20
3 Jumper bars	Orange	JB8-2	1SNK908302R0000	50	2.70
4 Circuit separators	Dark grey	CS-R1	1SNK900103R0000	20	5.20
5 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
	Grey	UMH	1SNK169999R0000	20	14.00
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27


Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.


ZS16-PE screw clamp terminal blocks

Ground - 10 mm 0.394 in spacing



1SNK161018F0014

ZS16-PE



10 mm 0.394 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- Rail contact non operator dependent,
- Performances above the requirements of IEC 60947-7-2 terminal block standard,
- Secured snap on or remove from the rail,
- PE.N function available by combining ZS16-PE with ZS16-BL and 2 poles jumper bar JB10-2.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screwless rail connection	Green-yellow	ZS16-PE	1SNK510150R0000	20	32.00

Main technical data

Connecting capacity		IEC	UL - CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 16 mm ²	24 ... 4 AWG
	Flexible	0.5 ... 16 mm ²	24 ... 4 AWG
	with non insulated ferrule	0.5 ... 16 mm ²	24 ... 4 AWG
	with insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG
Gauge		A6-B6	
Rated cross section		16 mm ²	4 AWG
Rated short-time withstand current (1s)		1920 A	2544 A
Protection		IP20	NEMA 1

Mounting instructions

Rail		TH 35-15
Wire stripping length		14 mm 0.531 in
Tool		Flat screwdriver Ø 5.5 mm Ø 0.217 in
Torque		1.8 N.m ± 0.2 15.9 lb.in ± 1.77

Explosive atmosphere classification

IM2 II 2 GD Ex eb III/IIIC - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g		
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00		
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20		
3 Jumper bars	Orange	JB10-2	1SNK910302R0000	50	4.60		
4 Circuit separators	Dark grey	CS-R1	1SNK900103R0000	20	5.20		
5 Terminal block markers		MC812	1SNK160000R0000	22	10.00		
		MC812PA	1SNK169999R0000	20	14.00		
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20	
		Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.

ZS25-PE screw clamp terminal blocks

Ground - 12 mm 0.472 in spacing



ZS25-PE



12 mm 0.472 in spacing

Description

Improve the safety of your installation in the event of a short-circuit thanks to our screwless rail contact:

- rail contact non operator dependent, secured snap on or off the rail,
- Same profile as ZS25 for aligned marking and identical end section.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screwless rail connection	Green-yellow	ZS25-PE	1SNK512150R0000	20	38.00

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 25 mm ²	24 ... 3 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 25 mm ²		Wire stripping length	14 mm 0.531 in
	with non insulated ferrule	0.5 ... 16 mm ²	24 ... 4 AWG		
	with insulated ferrule	0.5 ... 16 mm ²	24 ... 8 AWG		
Gauge		A6-B6		Tool	Flat screwdriver Ø 5.5 mm Ø 0.217 in
Rated cross section		16 mm ²	3 AWG	Torque	1.8 N.m ± 0.2 15.9 lb.in ± 1.77
Maximum cross section		25 mm ²			
Rated short-time withstand current (1s)		1920 A	3204 A		
Maximum short-time withstand current (1s)		3000 A			
Protection		IP20	NEMA 1		
Explosive atmosphere classification		IM2 II 2 GD Ex eb I/IIIC			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections	Dark grey	ES4	1SNK505910R0000	20	2.20
3 Circuit separators	Dark grey	CS-R1	1SNK900103R0000	20	5.20
4 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



ZS35-PE screw clamp terminal blocks

Ground - 16 mm 0.630 in spacing



Description

Reliable electrical and mechanical contact with the rail that exceeds the requirements of IEC 60947-7-2 terminal block standard.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground Screw rail connection	Green-yellow	ZS35-PE	1SNK516150R000	20	81.80


Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule Gauge	6 ... 35 mm ²	10 ... 2 AWG	Rail		TH 35-15
	6 ... 35 mm ²	10 ... 2 AWG	Wire stripping length		17 mm 0.669 in
	4 ... 35 mm ²	10 ... 2 AWG	Tool		Flat screwdriver
	A9		Screw clamp		Ø 6.5 mm Ø 0.256 in Ø 5.5 mm Ø 0.217 in
			Rail connection screw		
Rated cross section	35 mm ²	2 AWG	Torque		2.65 N.m ± 0.15 23.4 lb.in ± 1.33
Rated short-time withstand current (1s)	4200 A	4032 A	Screw clamp		1.6 N.m ± 0.15 14.2 lb.in ± 1.33
Protection	IP20	NEMA 1	Rail connection screw		
Explosive atmosphere classification	IM2 II 2 GD Ex eb IIIIC - Class I, Zone I, AEx e II				

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



ZS35-PE



16 mm 0.630 in spacing

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 Circuit separators 3 mm 0.118 in	Dark grey	CS-R1	1SNK900103R0000	20	5.20
3 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS35-PEN screw clamp terminal blocks

Ground + neutral - 32 mm 1.260 in spacing




35 mm²



1SNK161003F0014

ZS35-PEN



32 mm 1.260 in spacing



1

2

Description

Simplify your PE.N connection with ZS35-PE block connected to ZS35-BL through a pre-mounted jumper.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground + neutral	Green-yellow	ZS35-PEN	1SNK516170R0000	10	236.00

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	6 ... 35 mm ²		Rail	TH 35-15
	Flexible	6 ... 35 mm ²		Wire stripping length	17 mm 0.669 in
	with non insulated ferrule	6 ... 35 mm ²		Tool	Flat screwdriver
	with insulated ferrule	6 ... 35 mm ²		Screw clamp	Ø 6.5 mm Ø 0.256 in
Gauge		A9		Rail connection screw	Ø 5.5 mm Ø 0.217 in
Rated cross section		35 mm ²		Torque	2.65 N.m ± 0.15 23.5 lb.in ± 1.33
Rated short-time withstand current (1s)		4200 A		Screw clamp	1.6 N.m ± 0.15 14.2 lb.in ± 1.33
Protection		IP10		Rail connection screw	1.6 N.m ± 0.15 14.2 lb.in ± 1.33

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	RoHS	ERL	EAC
CE	RoHS	ERL	EAC

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZH1	1SNK900102R0000	20	24.00	
2 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
		Grey	UMH	1SNK900611R0000	10	0.20
		White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS50-PE screw clamp terminal blocks

Ground - 16 mm 0.630 in spacing



Description

Reliable electrical and mechanical contact with the rail that exceeds the requirements of the IEC 60947-7-2 terminal block standard.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground Screw rail connection	Green-yellow	ZS50-PE	1SNK516151R0000	20	83.00


Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule Gauge	1 ... 50 mm ²	18 ... 0 AWG	Rail		TH 35-7.5, TH 35-15
	1 ... 50 mm ²	18 ... 0 AWG	Wire stripping length		17 mm 0.669 in
	1 ... 50 mm ²	18 ... 0 AWG	Tool		Flat screwdriver
	Dia.11	18 ... 0 AWG	Screw clamp		Ø 6.5 mm Ø 0.256 in
			Rail connection screw		Ø 6.5 mm Ø 0.256 in
Rated cross section	50 mm ²	0 AWG	Torque		3 N.m ± 0.50 26.6 lb.in ± 4.43
Rated short-time withstand current (1s)	6000 A	6420 A	Screw clamp		3 N.m ± 0.25 26.553 lb.in ± 2.21
Protection	IP10	NEMA 1	Rail connection screw		
Explosive atmosphere classification	IM2 II 2 GD Ex eb III/IIIC				

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



ZS50-PE



16 mm 0.630 in spacing



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS70-PE screw clamp terminal blocks

Ground - 22 mm 0.866 in spacing



ZS70-PE



22 mm 0.866 in spacing



Description

Reliable electrical and mechanical contact with the rail that exceeds the requirements of IEC 60947-7-2 terminal block standard.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground Screw rail connection	Green-yellow	ZS70-PE	1SNK522150R0000	10	222.00 g

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp	Rigid - Solid / Stranded	16 ... 95 mm ²	4 ... 00 AWG	Rail	TH 35-15
	Flexible	16 ... 70 mm ²		Wire stripping length	25 mm 0.984 in
	with non insulated ferrule	16 ... 50 mm ²		Tool	Allen key
	with insulated ferrule	16 ... 50 mm ²		Screw clamp	Ø 6 mm Ø 0.236 in
Gauge	B11		Rail connection screw	Ø 4 mm Ø 0.158 in	
Rated cross section	70 mm ²	00 AWG	Torque	6.5 N.m ± 0.5 57.5 lb.in ± 4.43	
Rated short-time withstand current (1s)	8400 A	8088 A	Screw clamp	1.9 N.m ± 0.1 16.82 lb.in ± 0.885	
Protection	IP10	NEMA 1	Rail connection screw	16.82 lb.in ± 0.885	

Explosive atmosphere classification

IM2 II 2 GD Ex eb I/IIIC - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)	
1 End stops	Dark grey	BAZH1	1SNK900102R0000	20	24.00	
2 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
		Universal wire markers holder	UMH	1SNK900611R0000	10	0.20
		Blank marker	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

ZS95-PE screw clamp terminal blocks

Ground - 26 mm 1.024 in spacing



Description

Reliable electrical and mechanical contact with the rail that exceeds the requirements of IEC 60947-7-2 terminal block standard.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Ground Screw rail connection	Green-yellow	ZS95-PE	1SNK526150R0000	10	278.00 g


Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule Gauge	35 ... 120 mm ²	2 ... 0000 AWG	Rail		TH 35-15
	35 ... 95 mm ²		Wire stripping length		26 mm 1.024 in
	35 ... 50 mm ²		Tool		Allen key Ø 6 mm Ø 0.236 in
	B12		Screw clamp		Ø 4 mm Ø 0.158 in
			Rail connection screw		
Rated cross section	95 mm ²	0000 AWG	Torque		9.25 N.m ± 0.25 81.7 lb.in ± 2.2
Rated short-time withstand current (1s)	11400 A	12840 A	Screw clamp		1.9 N.m ± 0.1 16.82 lb.in ± 0.885
			Rail connection screw		
Protection	IP10	NEMA 1			
Explosive atmosphere classification	IM2 II 2 GD Ex eb III/IIIC - Class I, Zone I, AEx e II				

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



ZS95-PE



26 mm 1.024 in spacing



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-S screw clamp terminal blocks

Disconnect with blade - 5.2 mm 0.205 in spacing



ZS4-S



5.2 mm 0.205 in spacing

Description

- Ease your disconnect operations with the disconnect blade operated by hand or with a screwdriver,
- Same profile as ZS4 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Disconnect Profile aligned with ZS4	Grey	ZS4-S	1SNK505310R0000	50	8.60
	Blue	ZS4-S-BL	1SNK505320R0000	50	8.60
	Orange	ZS4-S-OR	1SNK505330R0000	50	8.60

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.2 ... 4 mm ²		Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
	Gauge	A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.2 ... 1.5 mm ²			
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		25 A / 4 mm ²	25 A / 10 AWG		
Rated short-time withstand current (1s)		480 A		Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey	ES4	1SNK505910R0000	20	2.20
3 Circuit separators 3 mm 0.118 in	Dark grey	CS-R1	1SNK900103R0000	20	5.20
4 Shield connectors		SHBS	1SNK900600R0000	20	3.50
5 Protecting covers 5.2 mm 0.205 in spacing	Transparent	PL5	1SNK900618R0000	10	1.50
6 Terminal block markers	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41790	1SNB041790R0512	1960	0.23


Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



ZS4-S-T screw clamp terminal blocks

Disconnect with blade - with test socket - 5.2 mm 0.205 in spacing



4 mm²
10 AWG

Description

- Ease your test operations with the 2 built-in test sockets,
- Screwdriver or hand operated disconnect blade,
- Same profile as ZS4 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS4, with 2 test sockets DIA 2 mm 0.079 in	Grey <input type="checkbox"/>	ZS4-S-T2	1SNK505311R0000	50	8.90
	Blue <input type="checkbox"/>	ZS4-S-T2-BL	1SNK505321R0000	50	8.90
	Orange <input type="checkbox"/>	ZS4-S-T2-OR	1SNK505331R0000	50	8.90
Profile aligned with ZS4, with 2 test sockets DIA 2.3 mm 0.091 in	Grey <input type="checkbox"/>	ZS4-S-T2.3	1SNK505312R0000	50	8.80


Main technical data

Connecting capacity	IEC	UL - CSA	Rail	TH 35-7.5, TH 35-15	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Wire stripping length	11 mm 0.412 in
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
	Gauge	A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	Flat screwdriver Ø 3.5 mm 0.138 in
	Flexible with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		25 A / 4 mm ²	25 A / 10 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated short-time withstand current (1s)		480 A			
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	RoHS	UL	CSA	EAC
----	------	----	-----	-----



1SNK161034F0014

ZS4-S-T



5.2 mm 0.205 in spacing

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey <input type="checkbox"/>	ES4	1SNK505910R0000	20	2.20
3 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R1	1SNK900103R0000	20	5.20
4 Shield connectors		SHBS	1SNK900600R0000	20	3.50
5 Protecting covers 5.2 mm 0.205 in spacing	Transparent <input checked="" type="checkbox"/>	PL5	1SNK900618R0000	10	1.50
6 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-S-R1 screw clamp terminal blocks

Disconnect with blade - 6 mm 0.236 in spacing



ZS4-S-R1



6 mm 0.236 in spacing

Description

- Simplify the alternated distribution thanks to the two jumper channels aligned with ZS4 feed-through terminal blocks,
- Ease your disconnect operations with the disconnect blade operated by hand or with a screwdriver.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS4-SF	Grey	ZS4-S-R1	1SNK506310R0000	50	13.20
	Blue	ZS4-S-R1-BL	1SNK506320R0000	50	13.20
	Orange	ZS4-S-R1-OR	1SNK506330R0000	50	13.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²		Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.2 ... 1.5 mm ²			
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		26 A / 4 mm ²	26 A / 10 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated short-time withstand current (1s)		480 A			
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		3 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000
For test plugs DIA 4 mm 0.157 in	TP4			1SNK900205R0000	20	2.40
4 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
5 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
		MC612	1SNK150000R0000	22	10.00	
6 Terminal block markers	White	MC612PA	1SNK159999R0000	20	11.00	
		Universal wire markers holder	UMH	1SNK900611R0000	10	0.20
		Blank marker	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.


Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

ZS4-S-T-R1 screw clamp terminal blocks

Disconnect with blade - with test socket - 6 mm 0.236 in spacing




4 mm²
10 AWG



1SNK161035F0014

ZS4-S-T-R1



6 mm 0.236 in spacing

Description

- Ease your test operations with the 2 built-in test sockets,
- Screwdriver or hand operated disconnect blade,
- Simplify the alternated distribution thanks to the two jumper channels aligned with ZS4 feed-through terminal blocks.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS4-SF, with 2 test sockets DIA 2 mm 0.079 in	Grey	ZS4-S-T2-R1	1SNK506311R0000	50	14.20
	Blue	ZS4-S-T2-R1-BL	1SNK506321R0000	50	14.20
	Orange	ZS4-S-T2-R1-OR	1SNK506331R0000	50	14.20
Disconnect Profile aligned with ZS4-SF, with 2 test sockets DIA 2.3 mm 0.091 in	Grey	ZS4-S-T2.3-R1	1SNK506312R0000	50	14.20

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG
	Gauge	A3-B3	
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG
	Flexible with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG
Rated current / Rated cross section	26 A / 4 mm ²	26 A / 10 AWG	
Rated short-time withstand current (1s)	480 A		
Rated voltage	400 V	150 V	
Impulse withstand voltage	6000 V		
Protection	IP20	NEMA 1	

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
3 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
4 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
5 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	


Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS6-S screw clamp terminal blocks

Disconnect with blade - 6 mm 0.236 in spacing



ZS6-S



6 mm 0.236 in spacing

Description

- Ease your disconnect operations with the disconnect blade operated by hand or with a screwdriver,
- Same profile as ZS6 feed-through terminal block for aligned marking and identical end section use.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS6	Grey <input type="checkbox"/>	ZS6-S	1SNK506315R0000	50	8.60
	Blue <input type="checkbox"/>	ZS6-S-BL	1SNK506322R0000	50	8.60

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 6 mm ²		Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 6 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	Gauge	A4-B3		Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Flexible	0.22 ... 2.5 mm ²	24 ... 14 AWG		
	with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG	Torque	0.85 N.m ± 0.15 7.52 lb.in ± 1.33
	Rated current / Rated cross section	25 A / 4 mm ²	25 A / 10 AWG		
	Maximum current / Maximum cross section	30 A / 6 mm ²			
	Rated short-time withstand current (1s)	480 A			
	Rated voltage	500 V	300 V		
	Impulse withstand voltage	6000 V			
	Protection	IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey <input type="checkbox"/>	ES4	1SNK505910R0000	20	2.20
3 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R1	1SNK900103R0000	20	5.20
4 Shield connectors		SHBS	1SNK900600R0000	20	3.50
5 Protecting covers 6 mm 0.236 in spacing	Transparent <input type="checkbox"/>	PL6	1SNK900619R0000	10	1.80
6 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.





All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

ZS6-S-4S-T screw clamp terminal blocks

Disconnect with blade - with test socket screws

6 mm 0.236 in spacing



Description

- Recommended for energy markets and highly demanding applications requiring that only one conductor be connected per clamp,
- Ease your disconnect and test operations with the two built-in test socket screws,
- Simplify the alternated distribution thanks to the jumper channel.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect with 2 test sockets DIA 2 mm 0,079 in	Grey <input type="checkbox"/>	ZS6-S-4S-T2	1SNK506316R0000	50	18.40

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 6 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.413 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Gauge A4-B3	0.22 ... 4 mm ²	24 ... 12 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG	Torque	0.85 N.m ± 0.15 7.52 lb.in ± 1.33
	Flexible with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		27 A / 4 mm ²	28 A / 10 AWG		
Rated short-time withstand current (1s)		480 A			
Rated voltage		500 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		


ZS6-S-4S-T



6 mm 0.236 in spacing

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey <input type="checkbox"/>	ES6-4S	1SNK505911R0000	20	3.10
3 Jumper bars 2 poles	Orange <input type="checkbox"/>	JB6-2	1SNK906302R0000	50	1.30
		3 poles JB6-3	1SNK906303R0000	50	2.10
		4 poles JB6-4	1SNK906304R0000	50	2.90
		5 poles JB6-5	1SNK906305R0000	50	3.60
		10 poles JB6-10	1SNK906310R0000	20	7.40
4 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R1	1SNK900103R0000	20	5.20
5 Test adapters For test plugs DIA 2 mm 0.079 in	Dark grey <input type="checkbox"/>	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
6 Test connectors End module, 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20
7 Spacers 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80
		MC612	1SNK150000R0000	22	10.00
8 Terminal block markers	White <input type="checkbox"/>	MC612PA	1SNK159999R0000	20	11.00
		UMH	1SNK900611R0000	10	0.20
		MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS10-S screw clamp terminal blocks

Disconnect with blade - 8 mm 0.315 in spacing




10 mm²
6 AWG



1SNK161058F0014

ZS10-S



8 mm 0.315 in spacing

Description

- Ease your disconnect operations with the disconnect blade operated by hand or with a screwdriver,
- Same profile as ZS10 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS10	Grey <input type="checkbox"/>	ZS10-S	1SNK508315R0000	50	8.60
	Blue <input type="checkbox"/>	ZS10-S-BL	1SNK508320R0000	50	8.60

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 10 mm ²		Wire stripping length	12 mm 0.472 in
	with non insulated ferrule	0.22 ... 10 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 6 mm ²	24 ... 12 AWG		
	Gauge	A5-B5			
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Flexible	0.5 ... 4 mm ²	20 ... 12 AWG		
	with twin ferrule	0.5 ... 4 mm ²	20 ... 12 AWG		
Rated current / Rated cross section		25 A / 4 mm ²	25 A / 6 AWG	Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Maximum current / Maximum cross section		42 A / 10 mm ²			
Rated short-time withstand current (1s)		480 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	IEC CB	RoHS	UL	CSA	EAC	BV

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input checked="" type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey <input checked="" type="checkbox"/>	ES4	1SNK505910R0000	20	2.20
3 Circuit separators 3 mm 0.118 in	Dark grey <input checked="" type="checkbox"/>	CS-R1	1SNK900103R0000	20	5.20
4 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



ZS4-SP screw clamp terminal blocks

Disconnect with plug - 5.2 mm 0.205 in spacing



Description

- Save time with our screwless component holder plug,
- Same profile as ZS4 feed-through terminal block for aligned marking and identical end section use.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Disconnect Profile aligned with ZS4, plug delivered separately	Grey <input type="checkbox"/>	ZS4-SP	1SNK505313R0000	50	8.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG	Wire stripping length	11 mm 0.412 in
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Gauge	A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	Flexible with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		18 A / 2.5 mm ²	18 A / 10 AWG		
Rated short-time withstand current (1s)		300 A			
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		



ZS4-SP



5.2 mm 0.205 in spacing

All the connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	RoHS	UL	CSA	EAC
----	------	----	-----	-----

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey <input checked="" type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey <input checked="" type="checkbox"/>	ES4	1SNK505910R0000	20	2.20
3 Shield connectors		SHBS	1SNK900600R0000	20	3.50
4 Component plugs Components in series with circuit	Dark grey <input checked="" type="checkbox"/>	PG5	1SNK900401R0000	20	3.50
5 Disconnect plugs Equipped with linking bar	Orange <input checked="" type="checkbox"/>	PG5-R1	1SNK900402R0000	20	3.50
6 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-SP-T2 screw clamp terminal blocks

Disconnect with plug - with test socket - 5.2 mm 0.205 in spacing



ZS4-SP-T2



5.2 mm 0.205 in spacing

Description

- Ease your test operations with the 2 built-in test sockets DIA 2 mm 0.079 in,
- Save time with our screwless component holder plug,
- Same profile as ZS4 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Disconnect Profile aligned with ZS4, with 2 test sockets DIA 2 mm 0.079 in, plug delivered separately	Grey <input type="checkbox"/>	ZS4-SP-T2	1SNK505314R0000	50	8.40

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp	Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule Gauge	0.2 ... 4 mm ² 0.22 ... 4 mm ² 0.22 ... 4 mm ² 0.22 ... 2.5 mm ² A3-B3	24 ... 10 AWG 24 ... 10 AWG 24 ... 14 AWG	Rail	 TH 35-7.5, TH 35-15 11 mm 0.412 in
2 conductors per clamp	Rigid - Solid / Stranded Flexible with twin ferrule	0.2 ... 1.5 mm ² 0.2 ... 1.5 mm ² 0.22 ... 1.5 mm ²	24 ... 16 AWG 24 ... 16 AWG 24 ... 16 AWG	Wire stripping length	 Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section		18 A / 2.5 mm ²	18 A / 10 AWG	Tool	 Torque
Rated short-time withstand current (1s)		300 A			 0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	RoHS	UL	CSA	EAC

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey <input checked="" type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey <input checked="" type="checkbox"/>	ES4	1SNK505910R0000	20	2.20
3 Shield connectors		SHBS	1SNK900600R0000	20	3.50
4 Component plugs Components in series with circuit	Dark grey <input checked="" type="checkbox"/>	PG5	1SNK900401R0000	20	3.50
5 Disconnect plugs Equipped with linking bar	Orange <input checked="" type="checkbox"/>	PG5-R1	1SNK900402R0000	20	3.50
6 Terminal block markers Blank card	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-SP-R1 screw clamp terminal blocks

Disconnect with plug - 6 mm 0.236 in spacing



ZS4-SP-R1



6 mm 0.236 in spacing

Description

- Simplify the alternated distribution between feed-through and disconnect circuits thanks to the two aligned jumper channels,
- Save time with our screwless component holder plug.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS4-SF, plug delivered separately	Grey <input type="checkbox"/>	ZS4-SP-R1	1SNK506313R0000	50	14.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		18 A / 2.5 mm ²	20 A / 10 AWG		
Rated short-time withstand current (1s)		300 A			
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	RoHS	UL	CSA	EAC
CE	RoHS	UL	CSA	EAC

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
3 Test adapters	Dark grey <input type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
4 Test connectors End module, 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20	
5 Spacers 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80	
6 Component plugs Components in series with circuit	Dark grey <input type="checkbox"/>	PG5	1SNK900401R0000	20	3.50	
7 Disconnect plugs Equipped with linking bar	Orange <input type="checkbox"/>	PG5-R1	1SNK900402R0000	20	3.50	
8 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	



Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.

ZS4-SP-T2-R1 screw clamp terminal blocks

Disconnect with plug - with test socket - 6 mm 0.236 in spacing



ZS4-SP-T2-R1



6 mm 0.236 in spacing

Description

- Ease your test operations with the 2 built-in test sockets DIA 2 mm 0.079 in,
- Save time with our screwless component holder plug,
- Simplify the distribution between feed-through and disconnect circuits thanks to the two aligned jumper channels.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS4-SF, with 2 test sockets DIA 2 mm 0.079 in, plug delivered separately	Grey <input type="checkbox"/>	ZS4-SP-T2-R1	1SNK506314R0000	50	14.20

Main technical data

Connecting capacity		IEC	UL - CSA	Rail	TH 35-7.5, TH 35-15
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Wire stripping length	11 mm 0.412 in
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG		
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		18 A / 2.5 mm ²	20 A / 10 AWG		
Rated short-time withstand current (1s)		300 A		Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	RoHS	UL US	CSA	EAC
CE	RoHS	UL CNFR	CSA	EAC

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 Jumper bars 2 poles	Orange <input type="checkbox"/>	JB6-2	1SNK906302R0000	50	1.30
		3 poles JB6-3	1SNK906303R0000	50	2.10
		4 poles JB6-4	1SNK906304R0000	50	2.90
		5 poles JB6-5	1SNK906305R0000	50	3.60
		10 poles JB6-10	1SNK906310R0000	20	7.40
3 Test connectors End module, 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20
4 Spacers 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80
5 Component plugs Components in series with circuit	Dark grey <input type="checkbox"/>	PG5	1SNK900401R0000	20	3.50
6 Disconnect plugs Equipped with linking bar	Orange <input type="checkbox"/>	PG5-R1	1SNK900402R0000	20	3.50
7 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS10-SP screw clamp terminal blocks

Disconnect with plug - 8 mm 0.315 in spacing



Description

- Save time with our screwless component holder plug,
- Same profile as ZS10 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Disconnect Profile aligned with ZS10	Grey <input type="checkbox"/>	ZS10-SP	1SNK508316R0000	50	8.60

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 10 mm ²		Wire stripping length	12 mm 0.472 in
	with non insulated ferrule	0.22 ... 10 mm ²	24 ... 8 AWG		
	with insulated ferrule	0.22 ... 6 mm ²	24 ... 8 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Flexible	0.5 ... 4 mm ²			
	with twin ferrule	0.5 ... 4 mm ²	20 ... 12 AWG		
Rated current / Rated cross section		18 A / 2.5 mm ²	18 A / 6 AWG	Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Maximum current / Maximum cross section		18 A / 10 mm ²			
Rated short-time withstand current (1s)		300 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

CE	RoHS	UL	CSA	EAC
CE	RoHS	UL	CSA	EAC



1SNK161060F0014

ZS10-SP



8 mm 0.315 in spacing


Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2.2 mm 0.087 in	Dark grey <input type="checkbox"/>	ES4	1SNK505910R0000	20	2.20
3 Component plugs Components in series with circuit	Dark grey <input type="checkbox"/>	PG5	1SNK900401R0000	20	3.50
4 Disconnect plugs Equipped with linking bar	Orange <input type="checkbox"/>	PG5-R1	1SNK900402R0000	20	3.50
5 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

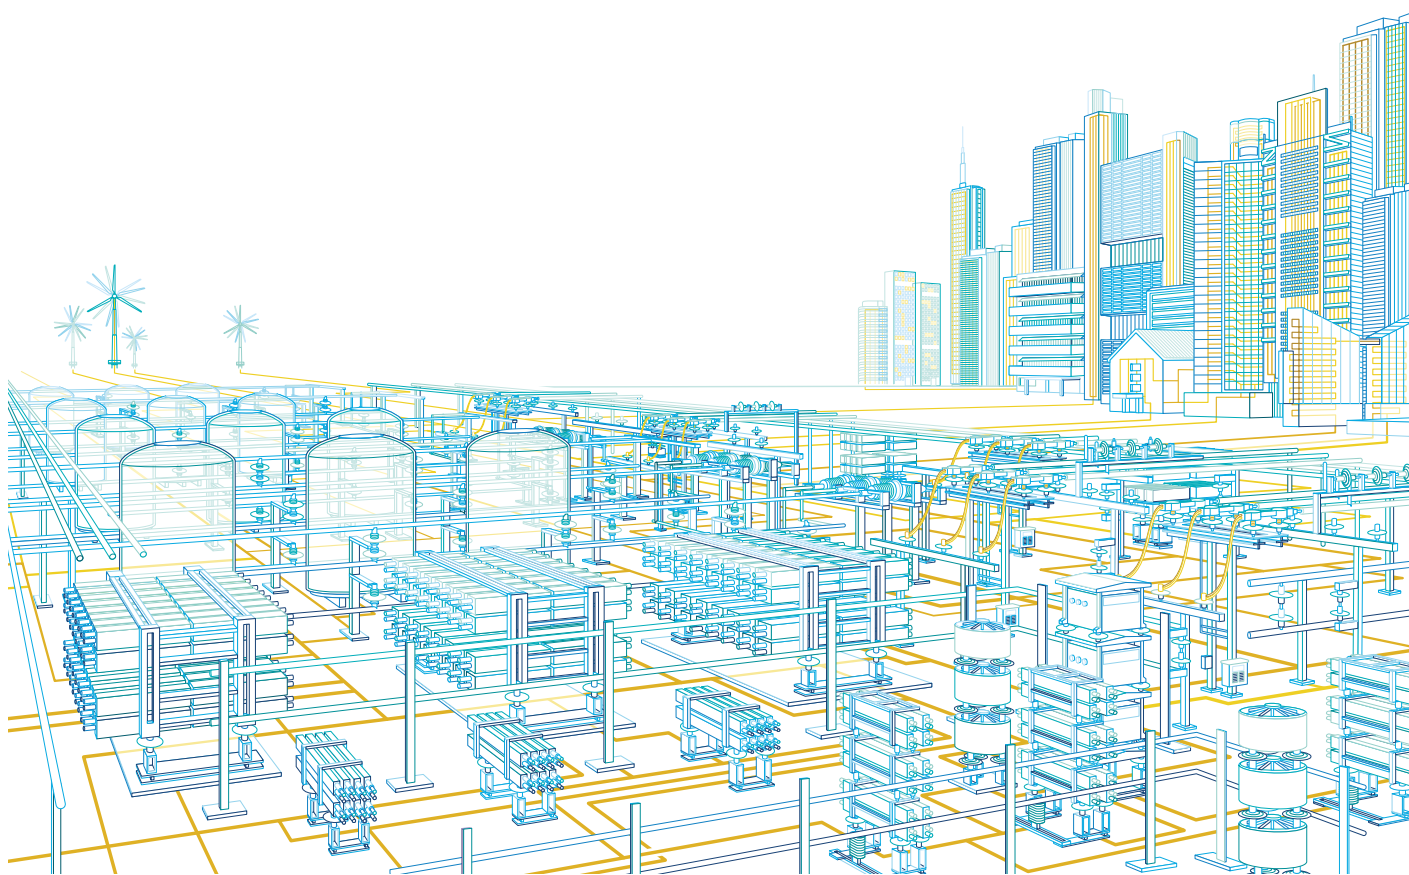

SNK series, terminal blocks

Fuse protection

3



Optimize your control circuit protection

Our SNK series fuse terminal blocks offer a full set of features and functions to protect your control circuits with efficiency and reliability.

All terminal blocks complies with the latest evolution of the international standards IEC 60947-7-3 ("Ancillary equipment safety requirements for fuse terminal blocks.") which fixes precise temperature constraint for short-circuit and overload protection (information in the catalogue pages related to the products).

Qualified for worldwide markets and applications
Eco-designed according to international environmental standards in sustainable development.



Select the right fuse holder for the right application

1 standard applications

The standard fuse holders feature compact dimensions while offering compatibility with 5 x 20 and 5 x 25 mm fuses. double deck terminal blocks allow efficient space reduction for panels with space constraints.

2 Expert for convenient circuit distribution

The expert fuse holders are equipped with two central jumper channels for convenient common distribution and are aligned with feed-through and disconnect terminal blocks. They facilitate alternated potential distribution and reduce wiring.

Additional features for easy trouble shooting and testing

Performant blown fuse indicators

Low leakage current (< 0.5 mA) allows the protection of low current circuits such as PLC's inputs without any risk of circuit disturbances.

Large voltage range (24/110 V and 110/250 V AC/DC) reduces the number of variants and allows adaptation to worldwide applications (24/110 V range covers North american market needs).

Easy testing

Some terminal blocks are equipped with Dia 2 mm built-in test socket screws for circuit testing while respecting the IP20 touch proof protection.




1
 5x20 and 5x25 mm fuses
 Compact and high density



2
 5x20 and 6.3x32 mm fuses
 Easy potential distribution




Low leakage current blown fuse indicator.
 Large voltage range: (24/110 V and 110/250 V AC and DC)



Convenient testing through built in test socket screws

SNK series, terminal blocks

Marshalling cabinets application

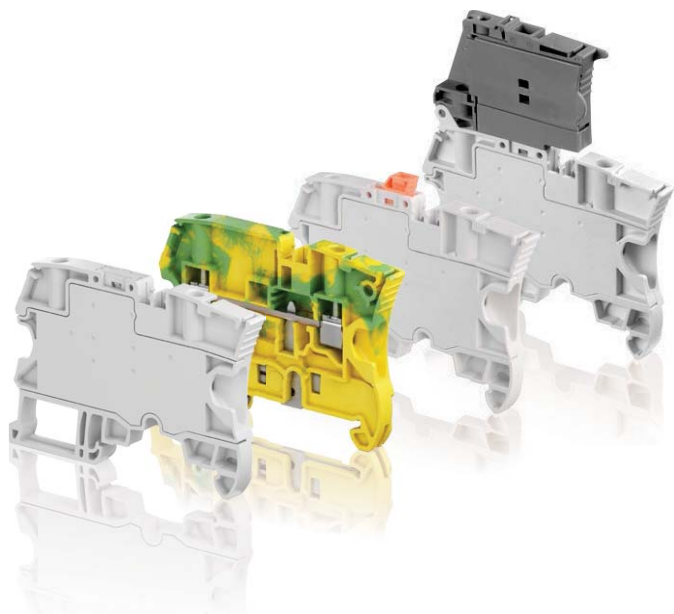

The smart choice for process automation

Large process automation applications typically require the use of a large number of digital or analog signals and sensors. Indeed, marshalling cabinets ensure an important cross wiring function, since the incoming field signal and the channel quantity of the I/O card of the controller (DCS, large PLC's) is always different. They facilitate the maintenance operations and ease the system modifications.

SNK aligned terminal blocks offering:

SNK series now features a full set of aligned terminal blocks matching the marshalling panels typical configurations. Fuse, disconnect, feed-through and ground terminal blocks with identical profile are providing compact and convenient solution. With only 6 mm spacing, two aligned screwless jumper channels, central large marking as well as aligned conductor entries, they are perfectly adapted to alternative potential distribution while still easy to connect.

3

Typical marshalling configurations




Digital signals

Popular potential distribution via double center channel.

Disconnect functions equipped with test points allow total isolation of circuits, ease circuit testing during start-up, test and maintenance operations.

Analog


Potential distribution for analog signals. Ground terminal blocks allow reliable connection of cable shields to the ground sparing the use of external shield bar.

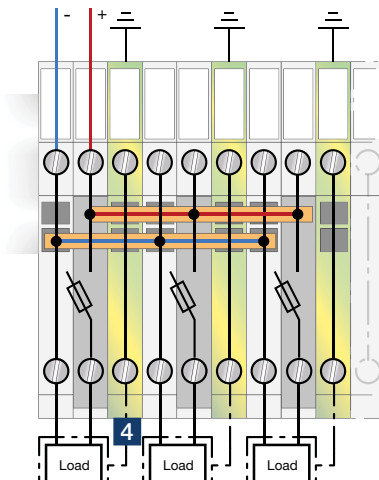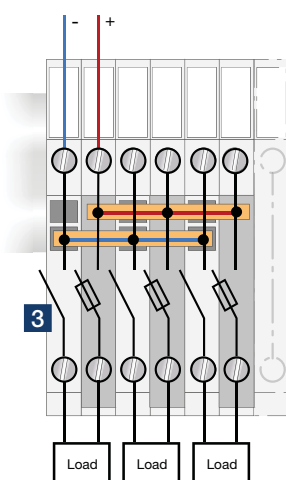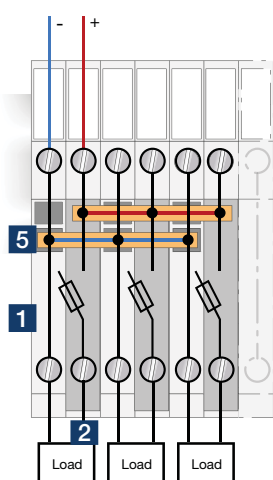

1 ZS4-R2



2 ZS4-SF



3 ZS4-S-R1 or ZS4-S-R2



4 ZS4-PE-R2



5 JB6-...

1SNK161086S0201

ZS4-SF1 screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - 8 mm 0.315 in spacing



Description


Protect your circuit with 5x25 and 5x20 fuse terminal blocks, compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks).

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Fuse	Grey, dark grey	ZS4-SF1	1SNK508410R0000	50	13.30
	Orange, dark Grey	ZS4-SF1-OR	1SNK508430R0000	50	13.30

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions		
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.432 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	Gauge A3-B3				
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
	Rated current / Rated cross section	6.3 A / 4 mm ²	10 A / 10 AWG		
Rated voltage	630 V	300 V	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885	
Impulse withstand voltage	8000 V				
Protection	IP20	NEMA 1			



ZS4-SF1



8 mm 0.315 in spacing

Separate arrangement	Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
		Exclusive short-circuit protection	4 W
Compound arrangement	Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	1.6 W
		Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections	Dark grey	ES4-SF	1SNK508960R0000	20	1.80
3 Lateral jumper bars	Black	PC81-10	1SNA173523R1100	10	5.00
4 Assembly rods		TGA8	1SNA168672R1100	10	1.00
		TGA8	1SNA168673R1200	10	
		TGA8	1SNA168674R1300	10	
5 Spring retaining rings		ANT	1SNA168675R1400	10	
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27



Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.


ZS4-SF1-T screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - with test socket

8 mm 0.315 in spacing



ZS4-SF1-T



8 mm 0.315 in spacing

Description

- Protect your circuit with 5x25 and 5x20 fuse terminal blocks (fuse not supplied with the terminal blocks),
- Compliant with IEC 60947-7-3 standard,
- With built in test sockets.

Ordering details



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With 2 test sockets DIA 2 mm 0.079 in	Grey, dark grey	ZS4-SF1-T2	1SNK508411R0000	50	13.30

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²		Wire stripping length	11 mm 0.432 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.2 ... 2.5 mm ²			
	with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		6.3 A / 4 mm ²	10 A / 10 AWG		
Rated voltage		630 V	300 V	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	1.6 W
			Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops 10 mm	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections 1.5 mm	Dark grey	ES4-SF	1SNK508960R0000	20	1.80	
3 Lateral jumper bars 10 poles 35 A	Black	PC81-10	1SNA173523R1100	10	5.00	
4 Assembly rods		2 poles	TGA8	1SNA168672R1100	10	1.00
		3 poles	TGA8	1SNA168673R1200	10	
		4 poles	TGA8	1SNA168674R1300	10	
			ANT	1SNA168675R1400	10	
5 Spring retaining rings						
6 Terminal block markers	Blank card	White	MC812	1SNK160000R0000	22	10.00
			MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27



Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.


ZS4-SF1-R screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - with blown fuse indicator

8 mm 0.315 in spacing



ZS4-SF1-R



8 mm 0.315 in spacing

Description

- Protect your circuit with 5x25 and 5x20 fuse terminal blocks (fuse not supplied with the terminal blocks),
- Compliant with IEC 60947-7-3 standard,
- Quickly identify the defective circuit thanks to the blown fuse indicator (with leakage current < 0.5 mA).

Ordering details



Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Fuse With blown fuse indicator 24 ... 110 V AC / DC	Grey, dark grey	ZS4-SF1-R1	1SNK508412R0000	50	13.30
With blown fuse indicator 115 ... 250 V AC / DC		ZS4-SF1-R3	1SNK508414R0000	50	13.30

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.432 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
2 conductors per clamp	Gauge	A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Flexible with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		6.3 A / 4 mm ²	10 A / 10 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated voltage		630 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	1.6 W
			Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)	
1 End stops 10 mm 0.394 in	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections 1.5 mm 0.059 in	Dark grey	ES4-SF	1SNK508960R0000	20	1.80	
3 Lateral jumper bars 10 poles 35 A	Black	PC81-10	1SNA173523R1100	10	5.00	
4 Assembly rods		2 poles	TGA8	1SNA168672R1100	10	1.00
		3 poles	TGA8	1SNA168673R1200	10	
		4 poles	TGA8	1SNA168674R1300	10	
5 Spring retaining rings		ANT	1SNA168675R1400	10		
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-SF1-R screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - with blown fuse indicator and test sockets - 8 mm 0.315 in spacing



ZS4-SF1-R



8 mm 0.315 in spacing

Description

- Protect your circuit with 5x25 and 5x20 fuse terminal blocks (fuse not supplied with the terminal blocks),
- Compliant with IEC 60947-7-3 standard,
- Ease the test with built-in test sockets,
- Quickly identify the defective circuit thanks to the blown fuse indicator (with leakage current < 0.5 mA).

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator 24 ... 110 V AC / DC and 2 test sockets DIA 2 mm 0.079 in	Grey, dark grey	ZS4-SF1-R2	1SNK508413R0000	50	13.30
With blown fuse indicator 115 ... 250 V AC / DC and 2 test sockets DIA 2 mm 0.079 in		ZS4-SF1-R4	1SNK508415R0000	50	13.30

Main technical data

Connecting capacity	IEC	UL - CSA	Rail	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule Gauge	0.2 ... 4 mm ² 0.22 ... 4 mm ² 0.22 ... 4 mm ² 0.22 ... 4 mm ² A3-B3	24 ... 10 AWG 24 ... 12 AWG 24 ... 12 AWG	Wire stripping length Tool Torque	TH 35-7.5, TH 35-15 11 mm 0.432 in Flat screwdriver Ø 3.5 mm Ø 0.138 in 0.6 N.m ± 0.1 5.31 lb.in ± 0.885
2 conductors per clamp	Rigid - Solid / Stranded Flexible with twin ferrule	0.2 ... 2.5 mm ² 0.2 ... 2.5 mm ² 0.22 ... 2.5 mm ²	24 ... 14 AWG 24 ... 14 AWG 24 ... 14 AWG		
Rated current / Rated cross section		6.3 A / 4 mm ²	10 A / 10 AWG		
Rated voltage		630 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection Exclusive short-circuit protection	2.5 W 4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection Exclusive short-circuit protection	1.6 W 4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections	Dark grey	ES4-SF	1SNK508960R0000	20	1.80
3 Lateral jumper bars	Black	PC81-10	1SNA173523R1100	10	5.00
4 Assembly rods		TGA8	1SNA168672R1100	10	1.00
		TGA8	1SNA168673R1200	10	
		TGA8	1SNA168674R1300	10	
5 Spring retaining rings		ANT	1SNA168675R1400	10	
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.

ZS4-R1 screw clamp terminal blocks

Feed-through - 8 mm 0.315 in spacing



Description

Simplify the alternated feed-through and fuse circuits operations:

- With the same profile as the ZS4-SF1, the wiring of the alternated feed-through and fuse circuits is easier.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through Profile aligned with ZS4-SF1	Grey <input type="checkbox"/>	ZS4-R1	1SNK508013R0000	50	11.00

Main technical data


Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 10 AWG	Wire stripping length	11 mm 0.432 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Flexible	0.2 ... 2.5 mm ²	24 ... 14 AWG		
with twin ferrule		0.22 ... 2.5 mm ²	24 ... 14 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated current / Rated cross section		24 A / 2.5 mm ²	26 A / 10 AWG		
Rated short-time withstand current (1s)		300 A			
Short Circuit Current Rating (with specific conditions)					
Rated voltage		800 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




1SNK16 1046R001.4

ZS4-R1



8 mm 0.315 in spacing




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 1.5 mm 0.059 in	Dark grey <input type="checkbox"/>	ES4-SF	1SNK508960R0000	20	1.80
3 Lateral jumper bars 10 poles 35 A	Black <input type="checkbox"/>	PC81-10	1SNA173523R1100	10	5.00
4 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
		MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Fuse screw clamp terminal blocks


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Fuse	Grey, dark grey <input type="checkbox"/>	ZS4-SF1	1SNK508410R0000	50	13.30

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.


Technical data valid for copper conductors only.

ZS4-S-R3 screw clamp terminal blocks

Disconnect with lever - 8 mm 0.315 in spacing



ZS4-S-R3



8 mm 0.315 in spacing

Description

Simplify the disconnect operations for the disconnect terminal blocks installed next to fuse terminal blocks ZS4-SF1:

- With the same profile as ZS4-SF1, the ZS4-S-R3 disconnect lever is easily operated by hand and the wiring of the alternated disconnect and fuse circuits is easier.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS4-SF1	Grey, orange	ZS4-S-R3	1SNK508416R0000	50	13.30

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.432 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
2 conductors per clamp	Gauge	A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Flexible	0.2 ... 2.5 mm ²	24 ... 14 AWG		
with twin ferrule		0.22 ... 2.5 mm ²	24 ... 14 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated current / Rated cross section		18 A / 2.5 mm ²	18 A / 10 AWG		
Maximum current / Maximum cross section		18 A / 4 mm ²			
Rated short-time withstand current (1s)		300 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect lever does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



CE	RoHS	UL	CSA	EAC	EV	DNV	Fina
CE	RoHS	UL	CSA	EAC	EV	DNV	Fina

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES4-SF	1SNK508960R0000	20	1.80	
3 Lateral jumper bars	Black	PC81-10	1SNA173523R1100	10	5.00	
4 Assembly rods		TGA8	1SNA168672R1100	10	1.00	
		TGA8	1SNA168673R1200	10		
		TGA8	1SNA168674R1300	10		
5 Spring retaining rings		ANT	1SNA168675R1400	10		
6 Terminal block markers	Blank card	White	MC812	1SNK160000R0000	22	10.00
			MC812PA	1SNK169999R0000	20	14.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Fuse screw clamp terminal blocks


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey, dark grey	ZS4-SF1	1SNK508410R0000	50	13.30

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.


Technical data valid for copper conductors only.

ZS4-SF screw clamp terminal blocks

For 5 x 20 fuses - 6 mm 0.236 in spacing



ZS4-SF



6 mm 0.236 in spacing

Description

- Protect your circuits with 5x20 fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Simplify the distribution thanks to the two jumper channels aligned with ZS4 feed-through and ZS4-S-R1 disconnect terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey, dark grey	ZS4-SF	1SNK506410R0000	50	18.60


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 10 AWG	Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG		
with twin ferrule		0.22 ... 1.5 mm ²	24 ... 16 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated current / Rated cross section		6.3 A / 4 mm ²	10 A / 10 AWG		
Rated voltage		500 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
3 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
4 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
5 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
6 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	Blank marker	White	MG-CPM-13 41791	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-SF-T screw clamp terminal blocks

For 5 x 20 fuses - with test socket - 6 mm 0.236 in spacing



ZS4-SF-T



6 mm 0.236 in spacing

Description

- Protect your circuits with 5x20 fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Simplify the distribution thanks to the two jumper channels aligned with ZS4 feed-through and ZS4-S-R1 disconnect terminal blocks,
- Ease the test with built-in test socket screws.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With 2 test sockets DIA 2 mm 0.079 in	Grey, dark grey	ZS4-SF-T2	1SNK506411R0000	50	18.60

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule Gauge	24 ... 10 AWG 24 ... 12 AWG 24 ... 12 AWG	Rail Wire stripping length
2 conductors per clamp	Rigid - Solid / Stranded Flexible with twin ferrule	24 ... 16 AWG 24 ... 16 AWG	Tool
Rated current / Rated cross section	6.3 A / 4 mm²	10 A / 10 AWG	Torque
Rated voltage	500 V	150 V	
Impulse withstand voltage	6000 V		
Protection	IP20	NEMA 1	

Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Separate arrangement	Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
		Exclusive short-circuit protection	4 W
Compound arrangement	Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	2.5 W
		Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 Jumper bars	Orange	JB6-2	1SNK906302R0000	50	1.30
		JB6-3	1SNK906303R0000	50	2.10
		JB6-4	1SNK906304R0000	50	2.90
		JB6-5	1SNK906305R0000	50	3.60
		JB6-10	1SNK906310R0000	20	7.40
3 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20
4 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80
5 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.


ZS4-SF-R screw clamp terminal blocks

For 5 x 20 fuses - with blown fuse indicator - 6 mm 0.236 in spacing



1SNK161039F0014

ZS4-SF-R



6 mm 0.236 in spacing

Description

- Protect your circuits with 5x20 fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Simplify the distribution thanks to the two jumper channels aligned with ZS4 feed-through and ZS4-S-R1 disconnect terminal blocks,
- Quickly identify the defective circuit thanks to the blown fuse indicator (with leakage current < 0.5 mA).

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator 24 ... 110 V AC / DC	Grey, dark grey	ZS4-SF-R1	1SNK506412R0000	50	18.60
With blown fuse indicator 115 ... 250 V AC / DC		ZS4-SF-R3	1SNK506415R0000	50	18.60

Main technical data

Connecting capacity	IEC	UL - CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ² 24 ... 10 AWG
	Flexible	0.22 ... 4 mm ²
	with non insulated ferrule	0.22 ... 4 mm ² 24 ... 12 AWG
	with insulated ferrule	0.22 ... 4 mm ² 24 ... 12 AWG
Gauge	A3-B3	
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ² 24 ... 16 AWG
	Flexible	0.2 ... 1.5 mm ²
	with twin ferrule	0.22 ... 1.5 mm ² 24 ... 16 AWG
Rated current / Rated cross section	6.3 A / 4 mm ²	10 A / 10 AWG
Rated voltage	500 V	150 V
Impulse withstand voltage	6000 V	
Protection	IP20	NEMA 1


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.412 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in
Torque		0.6 N.m ± 0.1 5.31 lb.in ± 0.885

Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
3 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
4 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
5 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
		MC612	1SNK150000R0000	22	10.00	
6 Terminal block markers	White	MC612PA	1SNK159999R0000	20	11.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.
Technical data valid for copper conductors only.


ZS4-SF-R screw clamp terminal blocks

For 5 x 20 fuses - with blown fuse indicator and test sockets

6 mm 0.236 in spacing



ZS4-SF-R



6 mm 0.236 in spacing

Description

- Protect your circuits with 5x20 fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Simplify the distribution thanks to the two jumper channels aligned with ZS4 feed-through and ZS4-S-R1 disconnect terminal blocks,
- Ease the test with built-in test socket screws,
- Quickly identify the defective circuit thanks to the blown fuse indicator (with leakage current < 0.5 mA).

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator 24 ... 110 V AC / DC and 2 test sockets DIA 2 mm 0.079 in	Grey, dark grey	ZS4-SF-R2	1SNK506413R0000	50	18.60
With blown fuse indicator 115 ... 250 V AC / DC and 2 test sockets DIA 2 mm 0.079 in		ZS4-SF-R4	1SNK506416R0000	50	18.60


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm²	24 ... 12 AWG	Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 4 mm²	24 ... 12 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.22 ... 4 mm²	24 ... 12 AWG		
2 conductors per clamp	Gauge	A3-B3		Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	Rigid - Solid / Stranded	0.2 ... 1.5 mm²	24 ... 16 AWG		
	Flexible	0.2 ... 1.5 mm²	24 ... 16 AWG		
with twin ferrule		0.22 ... 1.5 mm²	24 ... 16 AWG		
Rated current / Rated cross section		6.3 A / 4 mm²	10 A / 10 AWG		
Rated voltage		500 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Separate arrangement	Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
		Exclusive short-circuit protection	4 W
Compound arrangement	Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	2.5 W
		Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
		3 Test connectors	Dark grey	TC5-R1	1SNK900201R0000	10
4 Spacers	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
5 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.


Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic.


Technical data valid for copper conductors only.

ZS4-R2 screw clamp terminal blocks

Feed-through - 6 mm 0.236 in spacing




4 mm²
10 AWG



1SNK161074V0014

ZS4-R2



6 mm 0.236 in spacing

Description

Simplify the distribution of circuits in marshalling cabinets thanks to our feed-through terminal blocks with the same profile as ZS4-SF fuse, ZS4-S-R1 disconnect and ZS4-PE-R2 ground terminal blocks:

- Aligned conductor entries, jumper channels and marking in just 6 mm 0.236 in spacing,
- No end section needed: closed block.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Profile aligned with ZS4-SF and ZS4-S-R1	Grey <input type="checkbox"/>	ZS4-R2	1SNK506013R0000	50	12.40

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG
Gauge	A3-B3		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG
Rated current / Rated cross section	32 A / 4 mm ²	30 A / 10 AWG	
Rated short-time withstand current (1s)	480 A		
Rated voltage	800 V	300 V	
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
3 Cross spacing jumpers	Orange <input type="checkbox"/>	JB85-3	1SNK900603R0000	10	2.80	
4 Test adapters	Dark grey <input type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
5 Test connectors	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20	
6 Spacers	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80	
7 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK9000611R0000	10	0.20
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




Screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse Profile aligned with ZS4-R2 and ZS4-PE-R2	Grey, dark grey <input type="checkbox"/>	ZS4-SF	1SNK506410R0000	50	18.60
Disconnect Profile aligned with ZS4-R2 and ZS4-PE-R2	Grey <input type="checkbox"/>	ZS4-S-R1	1SNK506310R0000	50	13.20


All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZS4-PE-R2 screw clamp terminal blocks

Ground - 6 mm 0.236 in spacing



ZS4-PE-R2



6 mm 0.236 in spacing

Description

Simplify the shielding connection of your analog circuits in marshalling cabinets thanks to our ground terminal blocks with the same profile as ZS4-SF fuse, ZS4-S-R1 disconnect and ZS4-R2 feed-through terminal blocks.



Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Screwless rail connection	Green-yellow	ZS4-PE-R2	1SNK506153R0000	25 15.30

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.413 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A3-B3		Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated cross section		4 mm ²	10 AWG	Protection	
Rated short-time withstand current (1s)		480 A	396 A	IP20 NEMA 1	

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	10 mm 0.394 in	Dark grey BAM3	1SNK900001R0000	50	14.00
2 End sections	2.2 mm 0.087 in	Dark grey ES6-4S	1SNK505911R0000	20	3.10
3 Terminal block markers	Blank card	White MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Universal wire markers holder	Grey UMH	1SNK900611R0000	10	0.20
	Blank marker	White MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



ZS4-SF

ZS4-S-R1


Screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Profile aligned with ZS4-R2 and ZS4-PE-R2	Grey, dark grey ZS4-SF	1SNK506410R0000	50	18.60
Disconnect	Profile aligned with ZS4-R2 and ZS4-PE-R2	Grey ZS4-S-R1	1SNK506310R0000	50	13.20


All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

ZS4-S-R2 screw clamp terminal blocks

Disconnect with lever - 6 mm 0.236 in spacing



ZS4-S-R2



6 mm 0.236 in spacing

Description

Simplify the disconnect operations for the disconnect terminal blocks installed next to fuse terminal blocks ZS4-SF:

- With the same profile as ZS4-SF, the ZS4-S-R2 disconnect lever is easily operated by hand and the wiring of the alternated disconnect and fuse circuits is easier.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS4-SF	Grey, orange	ZS4-S-R2	1SNK506414R0000	50	21.6

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²		Wire stripping length	11 mm 0.412 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	Gauge	A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	Flexible	0.2 ... 1.5 mm ²			
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	Gauge	A3-B3			
Rated current / Rated cross section		18 A / 2.5 mm ²	13 A / 10 AWG		
Maximum current / Maximum cross section		18 A / 4 mm ²			
Rated short-time withstand current (1s)		300 A			
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect lever does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.



The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 Jumper bars	Orange	2 poles JB6-2	1SNK906302R0000	50	1.30
		3 poles JB6-3	1SNK906303R0000	50	2.10
		4 poles JB6-4	1SNK906304R0000	50	2.90
		5 poles JB6-5	1SNK906305R0000	50	3.60
		10 poles JB6-10	1SNK906310R0000	20	7.40
3 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in TP4	1SNK900205R0000	20	2.40
4 Test connectors End module, 5.2 mm 0.205 in	Dark grey	TC5-R1	1SNK900201R0000	10	5.20
5 Spacers 0.8 mm 0.031 in	Dark grey	ES-TC6	1SNK900105R0000	10	0.80
6 Terminal block markers	White	Blank card MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey	Universal wire markers holder UMH	1SNK900611R0000	10	0.20
		Blank marker MG-CPM-13 41791	1SNK041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.



Fuse screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey, dark grey	ZS4-SF	1SNK506410R0000	50	18.60


All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

ZS10-SF screw clamp terminal blocks

For 6.3x32 fuses - 8 mm 0.315 in spacing



ZS10-SF



8 mm 0.315 in spacing

Description

- Protect your circuits with 6.3x32 (1/4 x 1 1/4 in) fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Simplify the distribution thanks to the two jumper channels.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse Closed block	Grey, dark grey	ZS10-SF	1SNK508418R0000	50	28.50



Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 10 mm ²		Wire stripping length	13 mm 0.512 in
	with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG		
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
2 conductors per clamp	Gauge	A5-B5		Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG		
	Flexible	0.5 ... 4 mm ²	20 ... 12 AWG		
with twin ferrule		0.5 ... 4 mm ²	20 ... 12 AWG	Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Rated current / Rated cross section		10 A / 10 mm ²	22 A / 6 AWG		
Rated voltage		630 V	600 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		

Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Arrangement	Diagram	Description	Protection	Power
Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	4 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	2.5 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange	2 poles	JB8-2	1SNK908302R0000	50	2.70
		3 poles	JB8-3	1SNK908303R0000	50	4.10
		4 poles	JB8-4	1SNK908304R0000	50	5.60
		5 poles	JB8-5	1SNK908305R0000	40	7.00
		10 poles	JB8-10	1SNK908310R0000	20	14.20
		3 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000
For test plugs DIA 4 mm 0.157 in	TP4			1SNK900205R0000	20	2.40
4 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
5 Spacers	Dark grey	ES-TC8	1SNK900104R0000	10	1.40	
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.
Technical data valid for copper conductors only.

ZS10-SF-R screw clamp terminal blocks

For 6.3x32 fuses - with blown fuse indicator - 8 mm 0.315 in spacing



Description


- Protect your circuits with 6.3x32 (¼ x 1¼ in) fuse terminal blocks compliant with IEC 60947-7-3 standard (fuse not supplied with the terminal blocks),
- Quickly identify the defective circuit thanks to the blown fuse indicator (with leakage current < 0.5 mA).

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator 24 ... 110 V AC / DC	Grey, dark grey	ZS10-SF-R1	1SNK508421R0000	50	30.50
With blown fuse indicator 115 ... 250 V AC / DC		ZS10-SF-R3	1SNK508422R0000	50	30.50

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 10 mm²	24 ... 6 AWG	Wire stripping length	13 mm 0.512 in
	with non insulated ferrule	0.5 ... 10 mm²	24 ... 8 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
with insulated ferrule	0.5 ... 6 mm²	24 ... 10 AWG			
2 conductors per clamp	Gauge	A5-B5		Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
	Rigid - Solid / Stranded	0.5 ... 4 mm²	20 ... 12 AWG		
	Flexible	0.5 ... 4 mm²	20 ... 12 AWG		
	with twin ferrule	0.5 ... 4 mm²	20 ... 12 AWG		
Rated current / Rated cross section		10 A / 10 mm²	22 A / 6 AWG		
Rated voltage		630 V	600 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		



ZS10-SF-R



8 mm 0.315 in spacing

Mount your fuse safely without touching any active part: put the fuse into the hooks of the fuse holder shutter; at the closing of the shutter, the fuse is perfectly in place in the fuse holder.

Arrangement	Diagram	Description	Protection	Power
Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	4 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	2.5 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 Jumper bars	Orange	2 poles	JB8-2	1SNK908302R0000	50	2.70
		3 poles	JB8-3	1SNK908303R0000	50	4.10
		4 poles	JB8-4	1SNK908304R0000	50	5.60
		5 poles	JB8-5	1SNK908305R0000	40	7.00
		10 poles	JB8-10	1SNK908310R0000	20	14.20
3 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
4 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
5 Spacers	Dark grey	ES-TC8	1SNK900104R0000	10	1.40	
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS10-S-R2 screw clamp terminal blocks

Disconnect with lever - 8 mm 0.315 in spacing



ZS10-S-R2



8 mm 0.315 in spacing

Description

Simplify the disconnect operations for the disconnect terminal blocks installed next to fuse terminal blocks ZS10-SF:
 – With the same profile as ZS10-SF, the ZS10-S-R2 disconnect lever is easily operated by hand and the wiring of the alternated disconnect and fuse circuits is easier.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect Profile aligned with ZS10-SF	Grey, orange	ZS10-S-R2	1SNK508417R0000	50	35.90

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded Flexible	24 ... 6 AWG	Rail TH 35-7.5, TH 35-15
with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG	Wire stripping length 13 mm 0.512 in
with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG	
Gauge	A5-B5		
2 conductors per clamp	Rigid - Solid / Stranded Flexible	20 ... 12 AWG	Tool Flat screwdriver Ø 4 mm Ø 0.157 in
with twin ferrule	0.5 ... 4 mm ²	20 ... 12 AWG	
Rated current / Rated cross section	10 A / 4 mm ²	22 A / 25 AWG	
Maximum current / Maximum cross section	25 A / 10 mm ²		
Rated short-time withstand current (1s)	480 A		Torque 1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Rated voltage	630 V	600 V	
Impulse withstand voltage	6000 V		
Protection	IP20	NEMA 1	

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect lever does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 Jumper bars	Orange	JB8-2	1SNK908302R0000	50	2.70
3 poles		JB8-3	1SNK908303R0000	50	4.10
4 poles		JB8-4	1SNK908304R0000	50	5.60
5 poles		JB8-5	1SNK908305R0000	40	7.00
10 poles		JB8-10	1SNK908310R0000	20	14.20
3 Test adapters	Dark grey	TP2	1SNK900203R0000	20	1.70
For test plugs DIA 2 mm 0.079 in		TP4	1SNK900205R0000	20	2.40
For test plugs DIA 4 mm 0.157 in		TC5	1SNK900200R0000	10	5.20
4 Test connectors	Dark grey	TC5	1SNK900201R0000	10	5.20
5.2 mm 0.205 in spacing		TC5-R1	1SNK900201R0000	10	5.20
End module, 5.2 mm 0.205 in		ES-TC8	1SNK900104R0000	10	1.40
5 Spacers	Dark grey	ES-TC8	1SNK900104R0000	10	1.40
2.8 mm 0.110 in		MC812	1SNK160000R0000	22	10.00
6 Terminal block markers	White	MC812PA	1SNK169999R0000	20	14.00
Blank card		UMH	1SNK900611R0000	10	0.20
Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.



Fuse screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse Closed block	Grey, dark grey	ZS10-SF	1SNK508418R0000	50	28.50

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-D2 screw clamp terminal blocks

Double deck with 2 feed-through circuits - 5.2 mm 0.205 in spacing




4 mm²
12 AWG



1SNK161014F0014

ZS4-D2



5.2 mm 0.205 in spacing

Description

- Save space with double deck terminal blocks: 2 independent circuits connected in just 5.2 mm 0.205 in spacing,
- Customize yourself the ZS4-D2 by soldering electronic components (up to 8.8 mm x 3.2 mm 0.346 x 0.125 in) in the existing linking bars punching.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 2 feed-through circuits	Grey <input type="checkbox"/>	ZS4-D2	1SNK505210R0000	50	15.30
	Blue <input type="checkbox"/>	ZS4-D2-BL	1SNK505220R0000	50	15.30
	Orange <input type="checkbox"/>	ZS4-D2-OR	1SNK505230R0000	50	15.30

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²		Wire stripping length	10 mm 0.393 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Gauge		A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	Flexible	0.2 ... 1.5 mm ²			
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		29 A / 4 mm ²	20 A / 12 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated short-time withstand current (1s)		480 A			
Short Circuit Current Rating (with specific conditions)			100 kA 300 V		
Rated voltage		800 V			
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Increased safety Ex e : 440 V 29 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb III/IIIC - 300 V 20 A UL 60079-7 - Class I, Zone I, AEx e II

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BZH1	1SNK900102R0000	20	24.00
2 End sections 2.55 mm 0.100 in	Dark grey <input type="checkbox"/>	ES4-D2	1SNK505960R0000	20	4.10
3 Jumper bars 2 poles	Orange <input type="checkbox"/>	JB5-2	1SNK905302R0000	50	1.30
		3 poles JB5-3	1SNK905303R0000	50	2.00
		4 poles JB5-4	1SNK905304R0000	50	2.70
		5 poles JB5-5	1SNK905305R0000	50	3.50
		10 poles JB5-10	1SNK905310R0000	30	7.10
4 Test adapters For test plugs DIA 2 mm 0.079 in	Dark grey <input type="checkbox"/>	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
5 Test connectors 5.2 mm 0.205 in spacing	Dark grey <input type="checkbox"/>	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in TC5-R1	1SNK900201R0000	10	5.20
6 Shield connectors		SHB	1SNK900602R0000	20	4.90
7 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23



Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.

ZS4-D1 screw clamp terminal blocks

Double deck with 1 feed-through circuit - 5.2 mm 0.205 in spacing



ZS4-D1



5.2 mm 0.205 in spacing

Description

- Ease one potential distribution on 4 independent screw clamps,
- Save space by connecting conductors up to 4 mm² (CB certified) 12 AWG in just 5.2 mm 0.205 in spacing.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 1 feed-through circuit	Grey <input type="checkbox"/>	ZS4-D1	1SNK505211R0000	50	15.30

Main technical data

Connecting capacity		IEC	UL - CSA	Rail	TH 35-7.5, TH 35-15
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	10 mm 0.393 in
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG		
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Gauge		A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		29 A / 4 mm ²	20 A / 12 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated short-time withstand current (1s)		480 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		440 V 29 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/IIIc - 300 V 20 A UL 60079-7 - Class I, Zone I, AEx e II			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

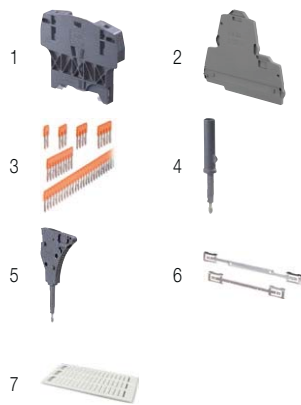

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00	
2 End sections	Dark grey <input type="checkbox"/>	ES4-D2	1SNK505960R0000	20	4.10	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB5-2	1SNK905302R0000	50	1.30
		3 poles	JB5-3	1SNK905303R0000	50	2.00
		4 poles	JB5-4	1SNK905304R0000	50	2.70
		5 poles	JB5-5	1SNK905305R0000	50	3.50
		10 poles	JB5-10	1SNK905310R0000	30	7.10
4 Test adapters	Dark grey <input type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
5 Test connectors	Dark grey <input type="checkbox"/>	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
6 Shield connectors		SHB	1SNK900602R0000	20	4.90	
7 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00	
	Grey <input type="checkbox"/>	MC512PA	1SNK149999R0000	20	10.00	
	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	
Universal wire markers holder		Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
Blank marker		White <input type="checkbox"/>	MG-CPM-13 41790	1960	0.23	


Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.


ZS6-D2 screw clamp terminal blocks

Double deck with 2 feed-through circuits - 6 mm 0.236 in spacing



1SNK161010F0014

ZS6-D2



6 mm 0.236 in spacing

Description

- Save space with double deck terminal blocks: 2 independent circuits connected in just 6 mm 0.236 in spacing,
- Customize yourself the ZS6-D2 by soldering electronic components (up to 8.8 mm x 3.2 mm 0.346 x 0.125 in) in the existing linking bars punching,
- Boost the performances: ZS6-D... with ES4-D2 end section is rated 1000 V DC IEC, perfectly adapted to solar applications.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 2 feed-through circuits	Grey	ZS6-D2	1SNK506210R0000	50	18.40
	Blue	ZS6-D2-BL	1SNK506220R0000	50	18.40
	Orange	ZS6-D2-OR	1SNK506230R0000	50	18.40
	Yellow	ZS6-D2-YL	1SNK506260R0000	50	18.40
	Red	ZS6-D2-RD	1SNK506262R0000	50	18.40
	White	ZS6-D2-WH	1SNK506265R0000	50	18.40
	Black	ZS6-D2-BK	1SNK506266R0000	50	18.40

Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG
	Flexible with non insulated ferrule	0.2 ... 6 mm ²	24 ... 12 AWG
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG
	Gauge	A4-B3	
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG
	Flexible with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG
	Rated current / Rated cross section	40 A / 6 mm ²	30 A / 10 AWG
Rated short-time withstand current (1s)	720 A		
Short Circuit Current Rating (with specific conditions)		100 kA	
Rated voltage	800 V	300 V	
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	
Increased safety Ex e	440 V 40 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/IIIC - 300 V 30 A UL 60079-7 - Class I, Zone I, AEx e II		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>.



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00	
2 End sections 2.55 mm 0.100 in	Dark grey	ES4-D2	1SNK505960R0000	20	4.10	
3 Jumper bars	Orange	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
4 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
5 Test connectors End module, 5.2 mm 0.205 in	Dark grey	TC5-R1	1SNK900201R0000	10	5.20	
6 Spacers 0.8 mm 0.031 in	Dark grey	ES-TC6	1SNK900105R0000	10	0.80	
7 Shield connectors		SHB	1SNK900602R0000	20	4.90	
8 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey	UMH	1SNK9000611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

ZS6-D1 screw clamp terminal blocks

Double deck with 1 feed-through circuit - 6 mm 0.236 in spacing



ZS6-D1



6 mm 0.236 in spacing

Description

- Ease one potential distribution on 4 independent screw clamps,
- Save space by connecting conductors up to 6 mm² 10 AWG in just 6 mm 0.236 in spacing,
- Boost the performances: ZS6-D... with ES4-D2 end section is rated 1000 V DC IEC, perfectly adapted to solar applications.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 1 feed-through circuit	Grey	ZS6-D1	1SNK506211R0000	50	18.40
	Red	ZS6-D1-RD	1SNK506214R0000	50	18.40


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.2 ... 6 mm ²		Wire stripping length	10 mm 0.393 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Flexible	0.2 ... 2.5 mm ²			
	with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		40 A / 6 mm ²	30 A / 10 AWG	Torque	0.85 N.m ± 0.15 7.52 lb.in ± 1.33
Rated short-time withstand current (1s)		720 A			
Short Circuit Current Rating (with specific conditions)			100 kA		
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		
Increased safety Ex e		440 V 40 A IEC/EN 60079-7 - IM2 II 2 GD Ex eb I/II/IIC - 300 V 30 A UL 60079-7 - Class I, Zone I, AEx e II			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

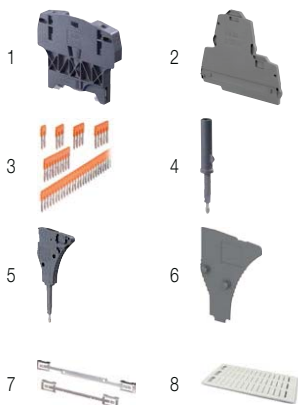

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 End sections 2.55 mm 0.100 in	Dark grey	ES4-D2	1SNK505960R0000	20	4.10
3 Jumper bars 2 poles	Orange	JB6-2	1SNK906302R0000	50	1.30
		3 poles JB6-3	1SNK906303R0000	50	2.10
		4 poles JB6-4	1SNK906304R0000	50	2.90
		5 poles JB6-5	1SNK906305R0000	50	3.60
		10 poles JB6-10	1SNK906310R0000	20	7.40
4 Test adapters For test plugs DIA 2 mm 0.079 in For test plugs DIA 4 mm 0.157 in	Dark grey	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
5 Test connectors End module, 5.2 mm 0.205 in	Dark grey	TC5-R1	1SNK900201R0000	10	5.20
6 Spacers 0.8 mm 0.031 in	Dark grey	ES-TC6	1SNK900105R0000	10	0.80
7 Shield connectors		SHB	1SNK900602R0000	20	4.90
8 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey	UMH	1SNK900611R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27


Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


ZS6-D2-PE screw clamp terminal blocks

Double deck with 1 feed-through circuit and 1 ground circuit

6 mm 0.236 in spacing



ZS6-D2-PE



6 mm 0.236 in spacing

Description

- Save space with ZS6-D2-PE terminal blocks: 1 feed-through circuit and 1 ground circuit in just 6 mm 0.236 in spacing,
- Customize yourself the ZS6-D2-PE terminal blocks by soldering electronic components (up to 8.8 mm x 3.2 mm 0.346 x 0.125 in) in the existing linking bars punching.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through + ground	Grey <input type="checkbox"/>	ZS6-D2-PE	1SNK506212R0000	50	18.40

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 6 mm ²	24 ... 12 AWG	Wire stripping length	10 mm 0.393 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	Gauge	A4-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG	Torque	0.85 N.m ± 0.15 7.52 lb.in ± 1.33
	Flexible with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Rated current / Rated cross section		41 A / 6 mm ²	30 A / 10 AWG		
Rated short-time withstand current (1s)		720 A			
Short Circuit Current Rating (with specific conditions)					
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00	
2 End sections	Dark grey <input type="checkbox"/>	ES4-D2	1SNK505960R0000	20	4.10	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
4 Test adapters	Dark grey <input type="checkbox"/>	TP4	1SNK900205R0000	20	2.40	
5 Test connectors	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20	
6 Spacers	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80	
7 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

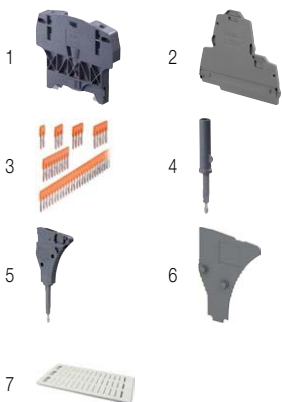

Double deck screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck	Grey <input type="checkbox"/>	ZS6-D2	1SNK506210R0000	50	18.41


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS6-D1-PE screw clamp terminal blocks

Double deck with 1 ground circuit - 6 mm 0.236 in spacing



ZS6-D1-PE



6 mm 0.236 in spacing

Description

- Save space with double deck ground terminal blocks aligned with ZS6-D2 double deck terminal blocks for convenient cabling process and circuit configuration,
- Benefit from our screwless rail connection: non operator independant, secured snap on or remove from the rail, performances above the requirements of IEC 60947-7-2 standard.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground 1 ground circuit	Green-yellow	ZS6-D1-PE	1SNK506250R0000	20	18.40

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 6 mm ²		Wire stripping length	10 mm 0.393 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 4 mm Ø 0.157 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
Gauge		A4-B3		Torque	0.85 N.m ± 0.15 7.52 lb.in ± 1.33
Rated cross section		6 mm ²	10 AWG		
Rated short-time withstand current (1s)		720 A			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>


CE	IEC	RoHS	UL	CSA	EAC	BV

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00
2 End sections 2.55 mm 0.100 in	Dark grey	ES4-D2	1SNK505960R0000	20	4.10
3 Terminal block markers	White	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey	UMH	1SNK900611R0000	10	0.20
	Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




ZS4-D2-S screw clamp terminal blocks

Double deck with 1 disconnect circuit and 1 feed-through circuit

5.2 mm 0.205 in spacing



ZS4-D2-S



5.2 mm 0.205 in spacing

Description

- Save space: connect one complete circuit on a single block featuring disconnect and feed-through for the return circuit in just 5.2 mm 0.205 in spacing,
- Same profile as ZS4-D... double deck terminal blocks: convenient cabling process, aligned jumpers, markers and common end section.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck 1 disconnect circuit and 1 feed-through circuit	Grey <input type="checkbox"/>	ZS4-D2-S	1SNK505315R0000	50	15.90

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.413 in
	Flexible with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Gauge	0.22 ... 2.5 mm ²	24 ... 14 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Disconnect circuit					
Rated current / Rated cross section		25 A / 4 mm ²	27 A / 10 AWG		
Feed-through circuit					
Rated current / Rated cross section		29 A / 4 mm ²	27 A / 10 AWG		
Rated short-time withstand current (1s)		480 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00
2 End sections 2.55 mm 0.100 in	Dark grey <input type="checkbox"/>	ES4-D2	1SNK505960R0000	20	4.10
3 Jumper bars 2 poles	Orange <input type="checkbox"/>	JB5-2	1SNK905302R0000	50	1.30
		JB5-3	1SNK905303R0000	50	2.00
		JB5-4	1SNK905304R0000	50	2.70
		JB5-5	1SNK905305R0000	50	3.50
		JB5-10	1SNK905310R0000	30	7.10
		JB5-50	1SNK905350R0000	10	36.00
4 Test adapters For test plugs DIA 2 mm 0.079 in	Dark grey <input type="checkbox"/>	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
5 Shield connectors For test plugs DIA 4 mm 0.157 in		SHB	1SNK900602R0000	20	4.90
6 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZS4-D2-S-T screw clamp terminal blocks

Double deck with 1 disconnect circuit with test socket screws and 1 feed-through circuit - 5.2 mm 0.205 in spacing



ZS4-D2-S-T



5.2 mm 0.205 in spacing

Description

– Find the same functionalities as ZS4-D2-S, upgraded with the two built-in test socket screws meant to ease your signal testing during commissioning and maintenance.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck 1 disconnect circuit with 2 test socket screws and 1 feed-through circuit	Grey <input type="checkbox"/>	ZS4-D2-S-T2	1SNK505316R0000	50	16.20

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	 TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG		
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	 11 mm 0.413 in
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Gauge		A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	 Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG		
with twin ferrule		0.22 ... 1.5 mm ²	24 ... 16 AWG		
Disconnect circuit				Torque	 0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated current / Rated cross section		25 A / 4 mm ²	27 A / 10 AWG		
Feed-through circuit					
Rated current / Rated cross section		29 A / 4 mm ²	27 A / 10 AWG		
Rated short-time withstand current (1s)		480 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Recommendation for best usage: in horizontal assemblies, disconnect terminal blocks should be mounted with fixed foot on top (power side) so that the disconnect knife does not partially close through gravity. Furthermore, as specified per IEC 60947-7-1, disconnect terminal blocks are intended to be used for temporary disconnection at zero potential and at no load.

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00	
2 End sections	Dark grey <input type="checkbox"/>	ES4-D2	1SNK505960R0000	20	4.10	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB5-2	1SNK905302R0000	50	1.30
		3 poles	JB5-3	1SNK905303R0000	50	2.00
		4 poles	JB5-4	1SNK905304R0000	50	2.70
		5 poles	JB5-5	1SNK905305R0000	50	3.50
		10 poles	JB5-10	1SNK905310R0000	30	7.10
4 Test adapters	Dark grey <input type="checkbox"/>	50 poles	JB5-50	1SNK905350R0000	10	36.00
		For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
			SHB	1SNK900602R0000	20	4.90
5 Shield connectors						
6 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.




All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

ZS4-D2-SF1 screw clamp terminal blocks


Double deck with 1 fuse circuit and 1 feed-through circuit

8 mm 0.315 in spacing



1SNK161096V0014

ZS4-D2-SF1



8 mm 0.315 in spacing

Description

- Save space: connect one complete circuit on a single block featuring fuse and feed-through for the return circuit,
- Protect your circuit with either 5X20 or 5X25 fuse (fuse not supplied with the terminal blocks),
- High performances product: compliant with IEC 60947-7-3 standard and jumper channel for the feed-through circuit.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck 1 fuse circuit and 1 feed-through circuit	Grey, dark grey	ZS4-D2-SF1	1SNK508425R0000	50	27.50

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.433 in
	Flexible with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	Gauge	A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible with twin ferrule	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Disconnect circuit				
Rated current / Rated cross section		6.3 A / 4 mm ²	12 A / 10 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Feed-through circuit					
Rated current / Rated cross section		32 A / 4 mm ²	30 A / 10 AWG		
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	1.6 W
			Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops 10 mm 0.394 in	Dark grey	BAZH1	1SNK900102R0000	20	24.00	
2 End sections 2.5 mm 0.098 in	Dark grey	ES4-D2-SF1	1SNK508911R0000	20	5.00	
3 Jumper bars	Orange	2 poles	JB8-2	1SNK908302R0000	50	2.70
		3 poles	JB8-3	1SNK908303R0000	50	4.10
		4 poles	JB8-4	1SNK908304R0000	50	5.60
		5 poles	JB8-5	1SNK908305R0000	40	7.00
		10 poles	JB8-10	1SNK908310R0000	20	14.20
4 Lateral jumper bars 10 poles		PC81-10	1SNA173523R1100	10	5.00	
5 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
6 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5	1SNK900200R0000	10	5.20
		End module, 5.2 mm 0.205 in	TC5-R1	1SNK900201R0000	10	5.20
7 Spacers 2.8 mm 0.110 in	Dark grey	ES-TC8	1SNK900104R0000	10	1.40	
8 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Universal wire markers holder	Grey	UMH	1SNK900061R0000	10	0.20
Blank marker	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Technical data valid for copper conductors only.


ZS4-D2-SF1-R screw clamp terminal blocks

Double deck with 1 fuse circuit with blown fuse indicator and 1 feed-through circuit - 8 mm 0.315 in spacing



1SNK161097V0014

ZS4-D2-SF1-R



8 mm 0.315 in spacing

Description

- Find the same functionalities as ZS4-D2-SF1, upgraded with our integrated blown fuse indicator (with leakage current < 0.5 mA),
- Only one part number needed to fit AC / DC 24 V up to 110 V.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Double deck 1 fuse circuit with blown fuse indicator 24 ... 110 V AC / DC and 1 feed-through circuit 1 fuse circuit with blown fuse indicator 115 ... 250 V AC / DC and 1 feed-through circuit	Grey, dark grey	ZS4-D2-SF1-R1	1SNK508423R0000	50	29.40
		ZS4-D2-SF1-R3	1SNK508424R0000	50	29.40

Main technical data


Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 6 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.433 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
2 conductors per clamp	Gauge	A3-B3		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Rigid - Solid / Stranded	0.2 ... 2.5 mm ²	24 ... 14 AWG		
	Flexible with twin ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG		
Disconnect circuit				Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated current / Rated cross section		6.3 A / 4 mm ²	12 A / 10 AWG		
Feed-through circuit					
Rated current / Rated cross section		32 A / 4 mm ²	30 A / 10 AWG		
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

Separate arrangement		Assembly composed of 1 fuse terminal block in between non fuse terminal blocks	Overload and short-circuit protection	2.5 W
			Exclusive short-circuit protection	4 W
Compound arrangement		Assembly composed of 5 fuse terminal blocks	Overload and short-circuit protection	1.6 W
			Exclusive short-circuit protection	4 W

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

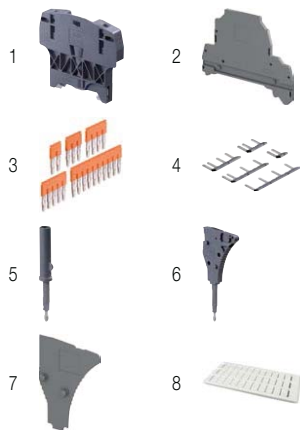

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAZH1	1SNK900102R0000	20	24.00	
2 End sections	Dark grey	ES4-D2-SF1	1SNK508911R0000	20	5.00	
3 Jumper bars	Orange	2 poles	JB8-2	1SNK908302R0000	50	2.70
		3 poles	JB8-3	1SNK908303R0000	50	4.10
		4 poles	JB8-4	1SNK908304R0000	50	5.60
		5 poles	JB8-5	1SNK908305R0000	40	7.00
		10 poles	JB8-10	1SNK908310R0000	20	14.20
4 Lateral jumper bars		10 poles	PC81-10	1SNA173523R1100	10	5.00
5 Test adapters	Dark grey	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
			TC5	1SNK900200R0000	10	5.20
6 Test connectors	Dark grey	5.2 mm 0.205 in spacing	TC5-R1	1SNK900201R0000	10	5.20
		End module, 5.2 mm 0.205 in	ES-TC8	1SNK900104R0000	10	1.40
7 Spacers	Dark grey					
8 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
		MC812PA	1SNK169999R0000	20	14.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops.


Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

Technical data valid for copper conductors only.

ZS4-T3 screw clamp terminal blocks

Triple deck with 3 feed-through circuits - 5.2 mm 0.205 in spacing



Description

Save space: 3 independent circuits in just 5.2 mm 0.205 in spacing,

- Fit many applications: space constraints, multiple signals distribution, sensors distribution, thanks to the jumper channels available on each deck.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Triple deck 3 feed-through circuits	Grey <input type="checkbox"/>	ZS4-T3	1SNK505212R0000	25	24.40

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 12 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.413 in
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 14 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Gauge	A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	Flexible with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		32 A / 4 mm ²	20 A / 12 AWG		
Rated short-time withstand current (1s)		480 A			
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		



ZS4-T3



5.2 mm 0.205 in spacing

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00
2 End sections 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	ES4-T3	1SNK505961R0000	20	4.20
3 Jumper bars 2 poles	Orange <input type="checkbox"/>	JB5-2	1SNK905302R0000	50	1.30
		JB5-3	1SNK905303R0000	50	2.00
		JB5-4	1SNK905304R0000	50	2.70
		JB5-5	1SNK905305R0000	50	3.50
		JB5-10	1SNK905310R0000	30	7.10
		JB5-50	1SNK905350R0000	10	36.00
4 Test adapters For test plugs DIA 2 mm 0.079 in For test plugs DIA 4 mm 0.157 in	Dark grey <input type="checkbox"/>	TP2	1SNK900203R0000	20	1.70
		TP4	1SNK900205R0000	20	2.40
5 Terminal block markers Blank card Universal wire markers holder Blank marker	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41790	1SNK041790R0512	1960	0.23

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

ZS4-T3-R1 screw clamp terminal blocks

Triple deck with 3 feed-through circuits - 6 mm 0.236 in spacing



ZS4-T3-R1



6 mm 0.236 in spacing

Description

Unique triple deck solution combining increased connecting capacity (up to 4 mm² with ferrule) and jumper channel available on each deck,

- Fit many applications: space constraints, multiple signals distribution, sensors distribution,
- Closed terminal block: no end section needed, optimized rigidity.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Triple deck Closed block with 3 feed-through circuits	Grey <input type="checkbox"/>	ZS4-T3-R1	1SNK506213R0000	25	28.30

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.22 ... 4 mm ²	24 ... 12 AWG	Wire stripping length	11 mm 0.413 in
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 12 AWG		
	Gauge	A3-B3			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.2 ... 1.5 mm ²	24 ... 16 AWG		
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		32 A / 4 mm ²	30 A / 10 AWG		
Rated short-time withstand current (1s)		480 A		Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input checked="" type="checkbox"/>	BAZH1	1SNK900102R0000	20	24.00	
2 Jumper bars	Orange <input checked="" type="checkbox"/>	2 poles	JB6-2	1SNK906302R0000	50	1.30
		3 poles	JB6-3	1SNK906303R0000	50	2.10
		4 poles	JB6-4	1SNK906304R0000	50	2.90
		5 poles	JB6-5	1SNK906305R0000	50	3.60
		10 poles	JB6-10	1SNK906310R0000	20	7.40
3 Test adapters	Dark grey <input checked="" type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
4 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.




All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

SNK series, terminal blocks

Screw clamp technology


Test & measurement

3

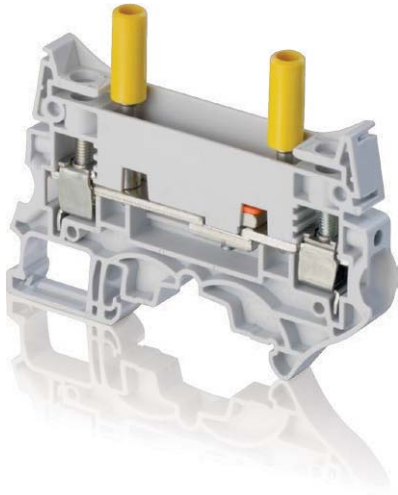

Secure your measurement operations

The new ZS10-ST test & measurement terminal blocks benefit from our long experience in the energy applications and from the SNK features: performances, ergonomics, common accessories and marking.



High performances

- 10 mm² 6 AWG
- 6 mm² 10 AWG with ferrule
- 50 A (IEC) 53 A (UL)
- Worldwide certifications



RoHS



Rely on our smart design

Insulated short circuit bridges:
SC-JB8


Insulated captive test sockets:
AJS9
6 colors
compatible with standard
DIA. 4 mm test plugs
(IEC 60010-031)

Circuit separators: CS
For visual separation between
CT & PT circuits

Protecting cover kits: KCO

New ground terminal block:
ZS10-PE-R1

Lateral jumper bar: PC8
For CT or PT commoning

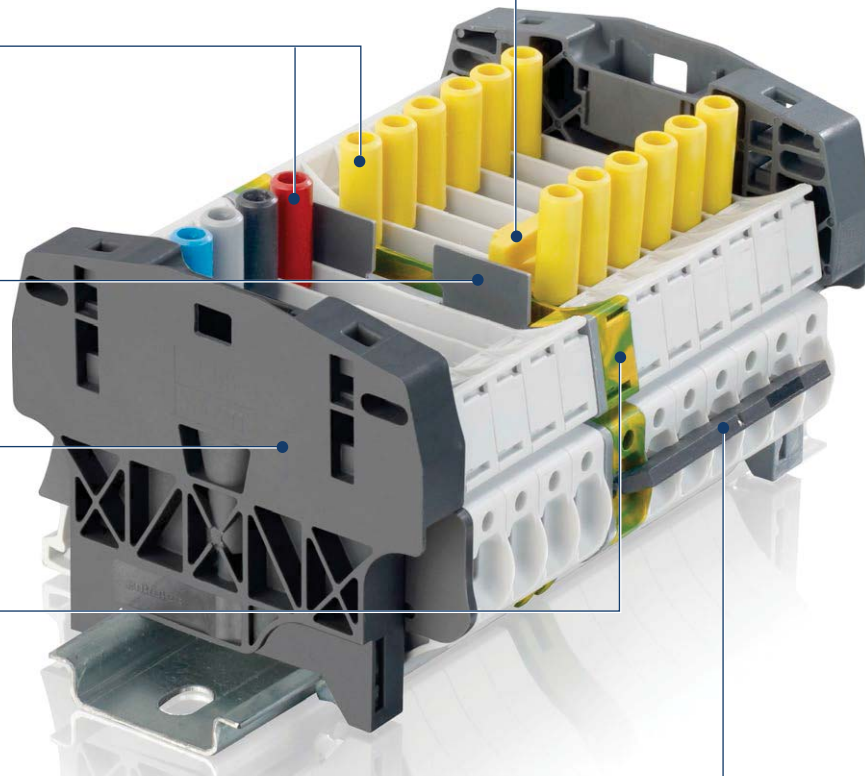

1SNK160057S0201



Assembly with protecting cover



Drilling and centering guide



Seal with cable tie



Convenient removal with screwdriver



Guarantee access only to authorized operators

cover can be permanently sealed with a seal or cable tie.

Centering drilling guide for seal or cable tie.


The cover is specially designed to ease its mounting or removal:

- Hook shape on each side for convenient removal with screwdriver

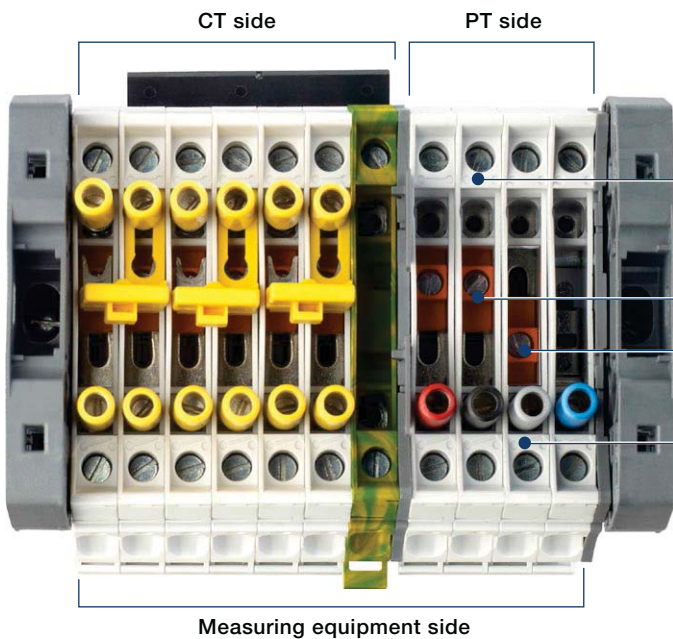

sliding link status: closed

Disconnect sliding link status:
Open and close symbols help to visualize the sliding link position



sliding link status: opened



1



2



3

Short-circuit CT circuits safely and conveniently


- 1 Fully operated by screwdriver (DIA 3.5 mm)
- 2 Short-circuited position secured thanks to AJS9 test sockets tightening
- 3 Adapted hook shape maintain the bridge on terminal block in the non connected position

1SNK16005750201

SNK series, terminal blocks


Test & measurement

Typical schematic for measuring devices




Common point on the transformers

3

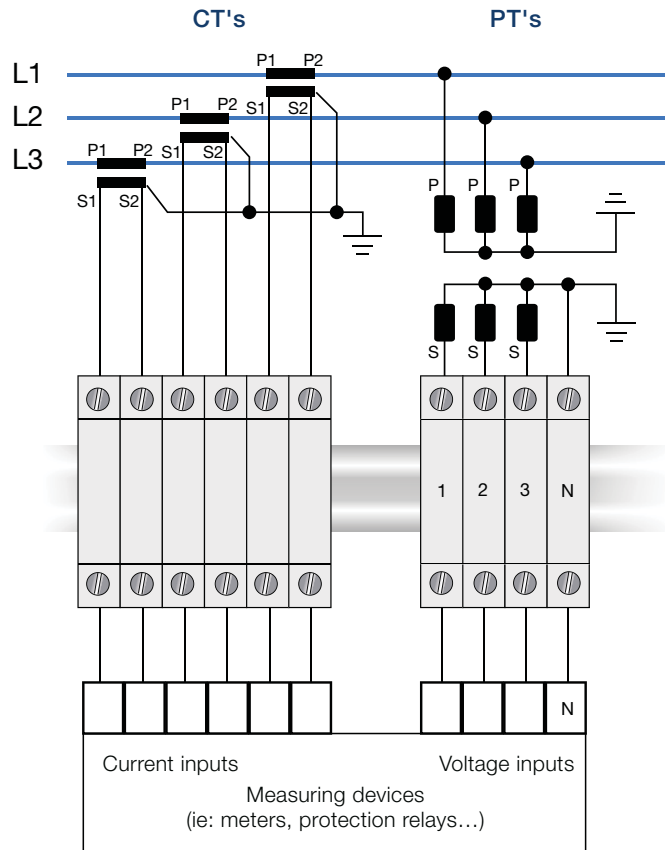


Bill of material optimized

Bill of material with convenient customization (test sockets, feed-through terminals...)

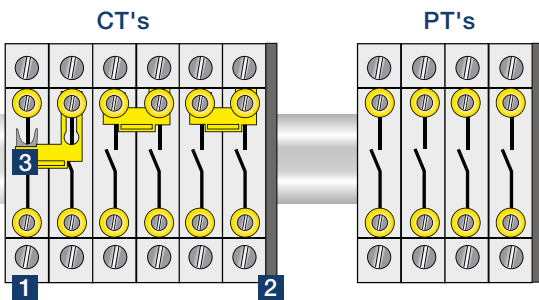

Description	Type	Order code	Qty needed	
			CT's	PT's
1 Terminal block	ZS10-ST-T4	1SNK508311R0000	6	4
2 End section	ES10-ST	1SNK508910R0000	1	1
3 Short-circuit bridges	SC-JB8-2	1SNK900652R0000	3	0

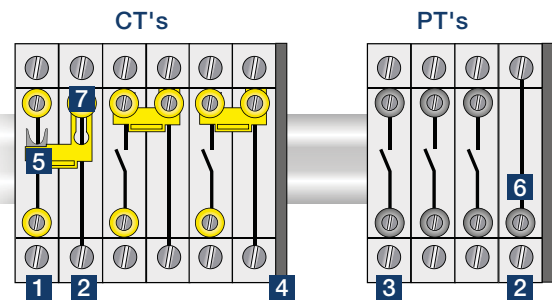


Description	Type	Order code	Qty needed	
			CT's	PT's
1 Terminal block	ZS10-ST-T4	1SNK508311R0000	3	0
2 Terminal block	ZS10-R1	1SNK508011R0000	3	1
3 Terminal block	ZS10-ST-1	1SNK508312R0000	0	3
4 End section	ES10-ST	1SNK508910R0000	1	1
5 Short-circuit bridges	SC-JB8-2	1SNK900652R0000	3	0
6 Test socket	AL4-M3	1SNA206721R0100	0	1
7 Insulated test socket	AJS9	1SNA179726R0200	3	0


SNK series, terminal blocks

Test & measurement

Typical schematic for measuring devices




Common point on the terminal block assembly

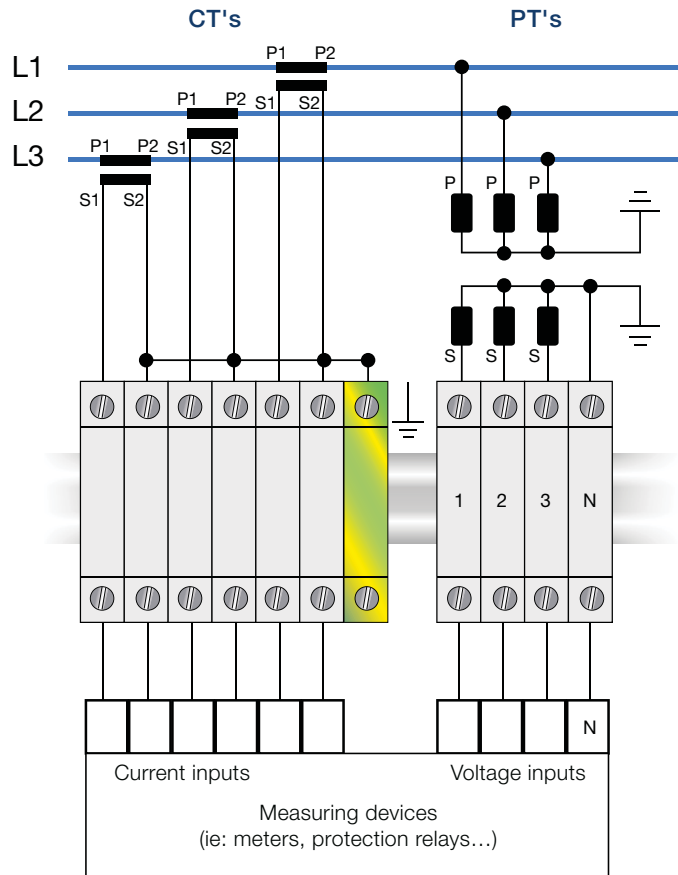


3

Bill of material optimized

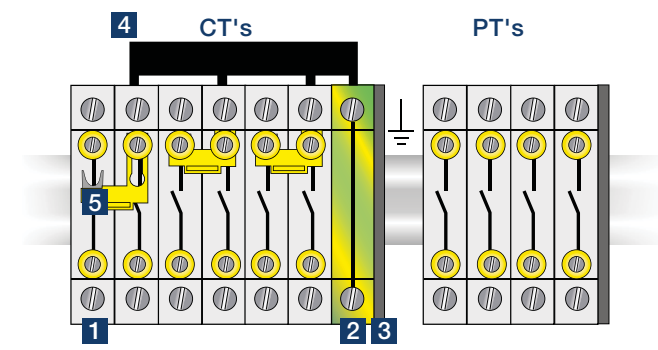

Description	Type	Order code	Qty needed	
			CT's	PT's
1 Terminal block	ZS10-ST-T4	1SNK508311R0000	6	4
2 Terminal block	ZS10-PE-R1	1SNK508151R0000	1	0
3 End section	ES10-ST	1SNK508910R0000	1	1
4 Lateral jumper bars	PC8-R1	1SNA400711R0600	1	0
5 Short-circuit bridges	SC-JB8-2	1SNK900652R0000	3	0

Bill of material with convenient customization (test sockets, feed-through terminals...)

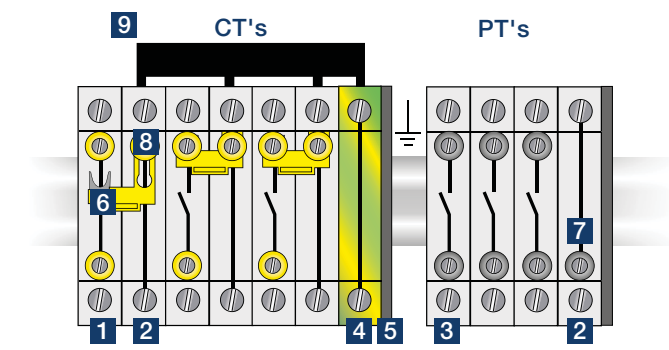

Description	Type	Order code	Qty needed	
			CT's	PT's
1 Terminal block	ZS10-ST-T4	1SNK508311R0000	3	0
2 Terminal block	ZS10-R1	1SNK508011R0000	3	1
3 Terminal block	ZS10-ST-1	1SNK508312R0000	0	3
4 Terminal block	ZS10-PE-R1	1SNK508151R0000	1	0
5 End section	ES10-ST	1SNK508910R0000	1	1
6 Short-circuit bridges	SC-JB8-2	1SNK900652R0000	3	0
7 Test socket	AL4-M3	1SNA206721R0100	0	1
8 Insulated test socket	AJS9	1SNA179726R0200	3	0
9 Lateral jumper bars	PC8-R1	1SNA400711R0600	1	0


1SNK160058S0201

ZS10-ST screw clamp terminal blocks

Test disconnect with sliding link - 8 mm 0.315 in spacing




10 mm²
6 AWG



1SNK161065P0014

ZS10-ST



8 mm 0.315 in spacing

Description

- Secure your disconnect operations in control circuits with the robust sliding link operated with a screwdriver,
- Customize ZS10-ST with colored test sockets in order to identify conveniently each phase of the Current Transformer or Potential Transformers secondary circuits,
- Fully compatible with the ZS10-ST-T4 accessories.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Grey <input type="checkbox"/>	ZS10-ST	1SNK508310R0000	25	24.80

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 10 mm ²		Wire stripping length	13 mm 0.512 in
	with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG	Screw clamp Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
	Gauge	A5-B5		Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG	Disconnect device Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.5 ... 4 mm ²			
	with twin ferrule	0.5 ... 4 mm ²	20 ... 12 AWG	Torque	0.4 ... 0.6 N.m 3.5 ... 5.3 lb.in
Rated current / Rated cross section		50 A / 10 mm ²	53 A / 6 AWG		
Rated short-time withstand current (1s)		1200 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey <input type="checkbox"/>	ES10-ST	1SNK508910R0000	20	3.5	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB8-2-R1	1SNK908902R0000	10	7.6
		3 poles	JB8-3-R1	1SNK908903R0000	10	11.6
		4 poles	JB8-4-R1	1SNK908904R0000	10	15.5
		5 poles	JB8-5-R1	1SNK908905R0000	10	19.4
		10 poles	JB8-10-R1	1SNK908910R0000	10	39.00
4 Circuit separators	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.44	
5 Test sockets	Yellow <input type="checkbox"/>	AJS9	1SNA179726R0200	25	3.60	
	Black <input type="checkbox"/>	AJS9-BK	1SNA206680R1500	25	3.60	
	Green <input type="checkbox"/>	AJS9-GN	1SNA206681R0200	25	3.60	
	Grey <input type="checkbox"/>	AJS9-GR	1SNA206682R0300	25	3.60	
	Blue <input type="checkbox"/>	AJS9-BL	1SNA206683R0400	25	3.60	
	Red <input type="checkbox"/>	AJS9-RD	1SNA206720R1400	25	3.60	
6 Terminal block markers		AL4-M3	1SNA206721R0100	50	1.10	
	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	
		MC812PA	1SNK169999R0000	20	14.00	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

Screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey <input type="checkbox"/>	ZS10-R1	1SNK508011R0000	25	20.90
Ground	Green-yellow <input type="checkbox"/>	ZS10-PE-R1	1SNK508151R0000	25	28.40

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.



ZS10-R1 ZS10-PE-R1


ZS10-ST-1 screw clamp terminal blocks

Test disconnect with sliding link for Potential Transformer circuits

8 mm 0.315 in spacing



ZS10-ST-1



8 mm 0.315 in spacing

Description

Test terminal blocks especially designed for Potential Transformers circuits:

- low profile voltage measurement thanks to the two compact built-in test sockets compatible with DIA 4 mm 0.157 in test plugs,
- Installed with our aligned feed-through and ground terminal blocks, you benefit of a complete and compact solution for your PT circuits.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect With 2 test sockets DIA 4 mm 0.157 in	Grey <input type="checkbox"/>	ZS10-ST-1	1SNK508312R0000	25	27.00

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 10 mm ²		Wire stripping length	13 mm 0.512 in
	with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG	Screw clamp Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
Gauge		A5-B5		Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG	Disconnect device Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.5 ... 4 mm ²			
with twin ferrule		0.5 ... 4 mm ²	20 ... 12 AWG	Torque	0.4 ... 0.6 N.m 3.5 ... 5.3 lb.in
Rated current / Rated cross section		50 A / 10 mm ²	53 A / 6 AWG		
Rated short-time withstand current (1s)		1200 A			
Rated voltage		630 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP10	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00
2 End sections 2 mm 0.079 in	Dark grey <input type="checkbox"/>	ES10-ST	1SNK508910R0000	20	3.5
3 Lateral jumper bars 10 poles	Black <input type="checkbox"/>	PC8-10	1SNA163313R2400	10	14.00
		PC8-R1	1SNA400711R0600	10	6.60
		PC8-R2	1SNA400712R0700	10	7.80
		PC8-R3	1SNA400713R0000	10	9.00
		PC8-R4	1SNA400724R0300	10	4.50
		PC8-R5	1SNA400842R0000	10	6.72
		PC8-R6	1SNA400843R0000	10	3.1
4 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.44
5 Protecting cover kits	Dark grey <input type="checkbox"/>	KCO	1SNK900624R0000	1	47.80
6 Protecting covers 1 m 39.4 in length	Transparent <input type="checkbox"/>	CO	1SNK900604R0000	1	300.00
7 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27
	Blank card		MC812PA	1SNK169999R0000	20

Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Profile aligned with ZS10-ST...	Grey <input type="checkbox"/>	ZS10-R1	1SNK508011R0000	25	20.90
Ground Profile aligned with ZS10-ST...	Green-yellow <input type="checkbox"/>	ZS10-PE-R1	1SNK508151R0000	25	28.40

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

Technical data valid for copper conductors only.



ZS10-R1




ZS10-PE-R1


ZS10-ST-T4 screw clamp terminal blocks

Test disconnect with sliding link for Current Transformer circuits


8 mm 0.315 in spacing



10 mm²
6 AWG



ZS10-ST-T4



8 mm 0.315 in spacing

Description

Test terminal blocks especially designed for Current Transformers circuits:

- easy and safe current measurement thanks to the two insulated built-in test sockets compatible with IP20 DIA 4 mm 0.157 in test plugs (per IEC60101-031),
- convenient short-circuit operations with the SC-JB insulated sliding bridges.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Disconnect With two yellow test sockets DIA 4 mm 0.157 in	Grey	<input type="checkbox"/> ZS10-ST-T4	1SNK508311R0000	25	31.90

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG	Wire stripping length	13 mm 0.512 in
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG	Screw clamp Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Gauge	A5-B5			
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG	Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
	Flexible with twin ferrule	0.5 ... 4 mm ²	20 ... 12 AWG		
Rated current / Rated cross section		50 A / 10 mm ²	53 A / 6 AWG	Disconnect device Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated short-time withstand current (1s)		1200 A		Torque	0.4 ... 0.6 N.m 3.5 ... 5.3 lb.in
Rated voltage		630 V	300 V	Test socket Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
Impulse withstand voltage		8000 V		Torque	0.4 ... 0.6 N.m 3.5 ... 5.3 lb.in
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 10 mm	Dark grey	BAM3	1SNK900001R0000	50	14.00
2 End sections 2 mm	Dark grey	ES10-ST	1SNK508910R0000	20	3.5
3 Lateral jumper bars 10 poles	Black	PC8-10	1SNA163313R2400	10	14.00
		PC8-R1	1SNA400711R0600	10	6.60
		PC8-R2	1SNA400712R0700	10	7.80
		PC8-R3	1SNA400713R0000	10	9.00
		PC8-R4	1SNA400724R0300	10	4.50
		PC8-R5	1SNA400842R0000	10	6.72
4 Circuit separators 3 mm	Dark grey	CS-R3	1SNK900107R0000	20	6.44
	Dark grey	KCO	1SNK900624R0000	1	47.80
5 Protecting cover kits	Dark grey	KCO	1SNK900624R0000	1	47.80
6 Protecting covers 1 m 39.4 in length	Transparent	CO	1SNK900604R0000	1	300.00
7 Short circuit bridges	Yellow	SC-JB8-2	1SNK900652R0000	25	2.00
		SC-JB8-3	1SNK900653R0000	25	3.4
		SC-JB8-4	1SNK900654R0000	25	4.7
8 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00
	Grey	UMH	1SNK900611R0000	10	0.20
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27
			MC812PA	1SNK169999R0000	20

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

Screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through Profile aligned with ZS10-ST...	Grey	<input type="checkbox"/> ZS10-R1	1SNK508011R0000	25	20.90
Ground Profile aligned with ZS10-ST...	Green-yellow	<input type="checkbox"/> ZS10-PE-R1	1SNK508151R0000	25	28.40


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.




ZS10-R1 ZS10-PE-R1

ZS10-R1 screw clamp terminal blocks

Feed-through - 8 mm 0.315 in spacing



ZS10-R1



8 mm 0.315 in spacing

Description

- With the same profile as the ZS10-ST..., the feed-through ZS10-R1 allows you to fully implement the electrical drawing of your CT or PT circuits,
- Fully compatible with the ZS10-ST... accessories.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Profile aligned with ZS10-ST..	Grey <input type="checkbox"/>	ZS10-R1	1SNK508011R0000	25	20.90


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 10 mm ²		Wire stripping length	13 mm 0.512 in
	with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG		
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
Gauge		A5-B5		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
2 conductors per clamp	Rigid - Solid / Stranded	0.5 ... 4 mm ²	20 ... 12 AWG		
	Flexible	0.5 ... 4 mm ²			
with twin ferrule		0.5 ... 4 mm ²	20 ... 12 AWG	Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Rated current / Rated cross section		57 A / 10 mm ²	62 A / 6 AWG		
Rated short-time withstand current (1s)		1200 A			
Short Circuit Current Rating (with specific conditions)					
Rated voltage		630 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Accessories





Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey <input type="checkbox"/>	ES10-ST	1SNK508910R0000	20	3.5	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles	JB8-2-R1	1SNK908902R0000	10	7.6
		3 poles	JB8-3-R1	1SNK908903R0000	10	11.6
		4 poles	JB8-4-R1	1SNK908904R0000	10	15.5
		5 poles	JB8-5-R1	1SNK908905R0000	10	19.4
		10 poles	JB8-10-R1	1SNK908910R0000	10	39.00
		4 Lateral jumper bars	Black <input type="checkbox"/>	10 poles	PC8-10	1SNA163313R2400
4/6 poles	PC8-R1			1SNA400711R0600	10	6.60
4/8 poles	PC8-R2			1SNA400712R0700	10	7.80
4/10 poles	PC8-R3			1SNA400713R0800	10	9.00
3/4 poles	PC8-R4			1SNA400724R0300	10	4.50
4/7 poles	PC8-R5			1SNA400842R0000	10	6.72
2/3 poles	PC8-R6			1SNA400843R0000	10	3.1
5 Circuit separators	Dark grey <input type="checkbox"/>			CS-R3	1SNK900107R0000	20
6 Terminal block markers	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	
	White <input type="checkbox"/>	MC812PA	1SNK169999R0000	20	14.00	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

ZS10-PE-R1 screw clamp terminal blocks

Ground - 8 mm 0.315 in spacing



ZS10-PE-R1



8 mm 0.315 in spacing

Description

- With the same profile as the ZS10-ST..., the ground ZS10-PE-R1 allows you to fully implement the electrical drawing of your CT or PT circuits,
- Fully compatible with the ZS10-ST... accessories,
- Short-circuit performances above the requirements of IEC 60947-7-2 terminal block standard,
- Secured snap on or remove from the rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with ZS10-ST...	Green-yellow	ZS10-PE-R1	1SNK508151R0000	25	28.40


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 10 mm ²	24 ... 6 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible	0.5 ... 10 mm ²	24 ... 6 AWG	Wire stripping length	13 mm 0.512 in
	with non insulated ferrule	0.5 ... 10 mm ²	24 ... 8 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.5 ... 6 mm ²	24 ... 10 AWG		
Gauge		A5-B5		Torque	1.3 N.m ± 0.3 11.5 lb.in ± 2.65
Rated cross section		10 mm ²	6 AWG		
Rated short-time withstand current (1s)		1200 A	1596 A		
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>




Accessories




Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 End stops	Dark grey	BAM3	1SNK900001R0000	50	14.00	
2 End sections	Dark grey	ES10-ST	1SNK508910R0000	20	3.5	
3 Jumper bars	Orange	2 poles	JB8-2-R1	1SNK908902R0000	10	7.6
		3 poles	JB8-3-R1	1SNK908903R0000	10	11.6
		4 poles	JB8-4-R1	1SNK908904R0000	10	15.5
		5 poles	JB8-5-R1	1SNK908905R0000	10	19.4
		10 poles	JB8-10-R1	1SNK908910R0000	10	39.00
		4 Lateral jumper bars	Black	10 poles	PC8-10	1SNA163313R2400
4/6 poles	PC8-R1			1SNA400711R0600	10	6.60
4/8 poles	PC8-R2			1SNA400712R0700	10	7.80
4/10 poles	PC8-R3			1SNA400713R0000	10	9.00
3/4 poles	PC8-R4			1SNA400724R0300	10	4.50
4/7 poles	PC8-R5			1SNA400842R0000	10	6.72
2/3 poles	PC8-R6			1SNA400843R0000	10	3.1
5 Circuit separators	Dark grey	CS-R3	1SNK900107R0000	20	6.44	
6 Terminal block markers	White	MC812	1SNK160000R0000	22	10.00	
	Grey	UMH	1SNK900611R0000	10	0.20	
	White	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	
	White	MC812PA	1SNK169999R0000	20	14.00	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

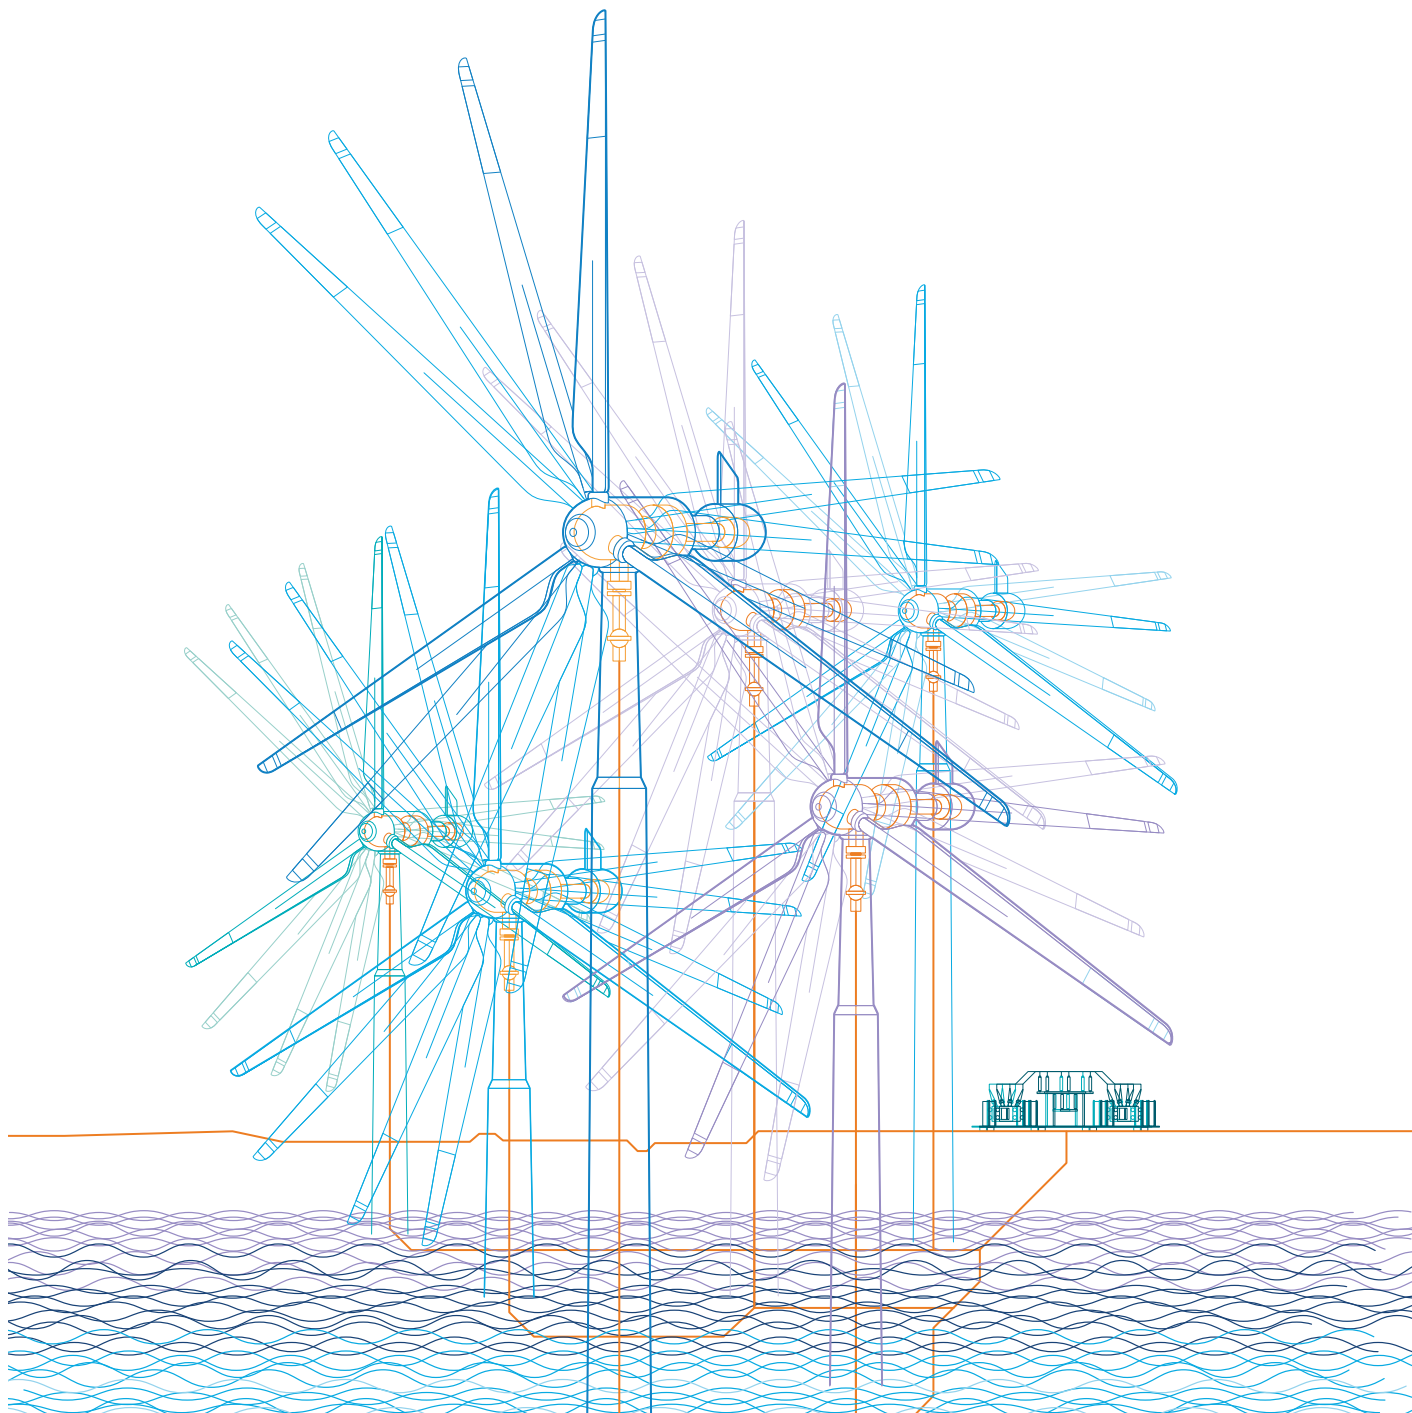

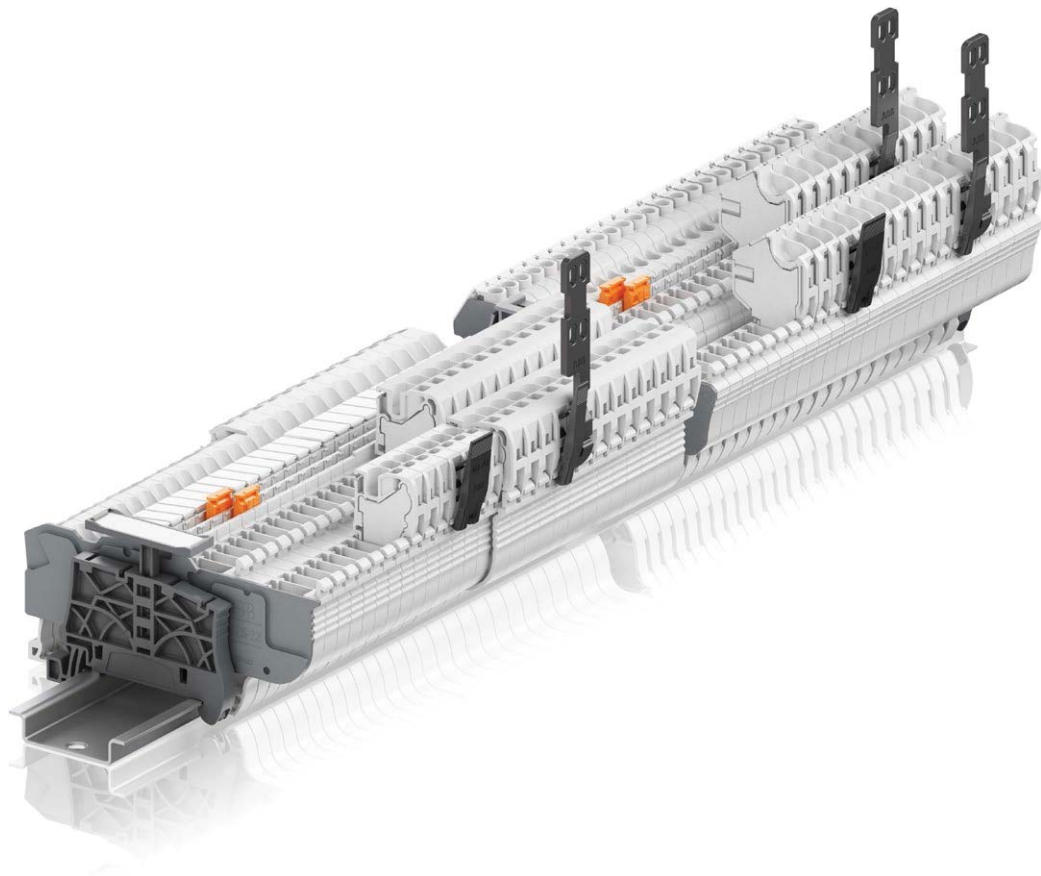

SNK series, terminal blocks

Pluggable technology



Technologies presentation	134
Overview	138

PI-Spring - Feed-through

2.5 mm ² / 12 AWG	ZDK2.5-22	140
	CDK2.5	141
4 mm ² / 10 AWG	ZDK4-22	142
	CDK4	143

Screw - Feed-through

4 mm ² / 10 AWG	ZDS4-22	144
	CDS4	145
	ZDS4-22-R1	146
	CDK4-R1	147

SNK series, terminal blocks

Pluggable technology



PI-Spring/Pluggable



Screw clamp/Pluggable

Smart Connections

Reliable in harsh conditions

Combine the benefits of our smart connections with the flexibility of the pluggable technology.

Qualified for worldwide applications such as marine or railways, withstanding the most severe vibration and shock tests.



Smart Logistics


Cost effective solutions

Create your own assemblies without tooling:

- Easily snap together multiple plugs
- Eliminate stock of pre-configured plugs.

Reduce your stock of unitary plugs:

- With only 2 plug variants needed.

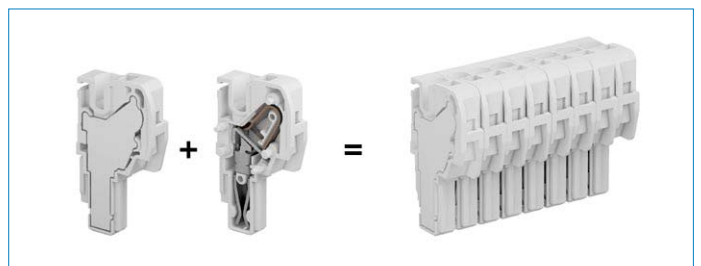

Only two plug variants are required to compose harnesses up to 15 poles.

Smart Design


Safety and protection

Eliminate connection errors with coding pegs:


- Simply insert the pegs to create a coding sequence.

Secure your wiring against accidental tearing:

- Automatic locking function
- Lock safely 2 to 8 plugs with only one locking device.




Convenient coding pegs.

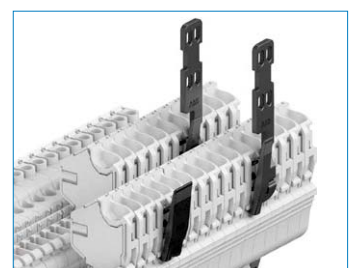



Locking devices available as well equipped with cable clamp.

Pluggable technology allows to increase productivity and secure the installation.



Serialize plugs harnesses

Instead of one to one wiring, the wires are combined in one single plug harness. Production and testing of harnesses can be serialized and outsourced.

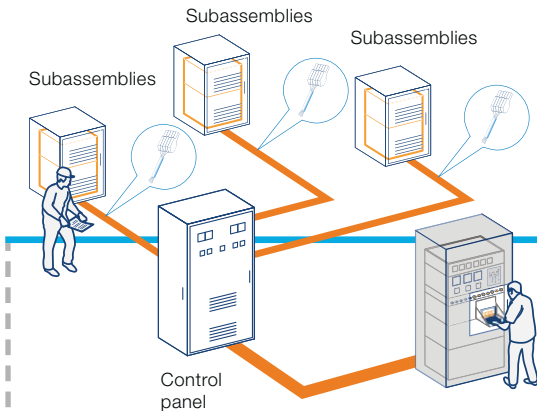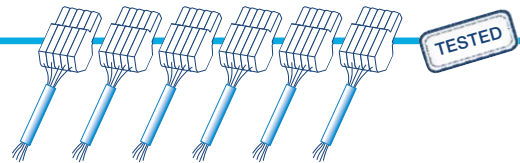


Mounting time reduced by 90%

Reduce the mounting and testing time of the whole equipment by connecting subassemblies with pluggable terminal blocks and harnesses. Ease the factory commissioning.

Disconnect for transportation

Easily disconnect the harnesses if needed for convenient transportation of big equipment.

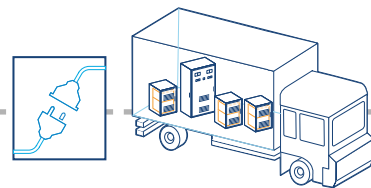

Quickly secure on-site reconnection

Secure on-site installation: Final reconnection is done in few quick steps and fully secured thanks to error-free coding system. Facilitate final commissioning.

Switchgear panels

Elevators

Industry

Rolling stocks

HVAC


Marine

SNK series, terminal blocks



Pluggable technology

Range overview from 2.5 to 4 mm²

PI-Spring/Pluggable

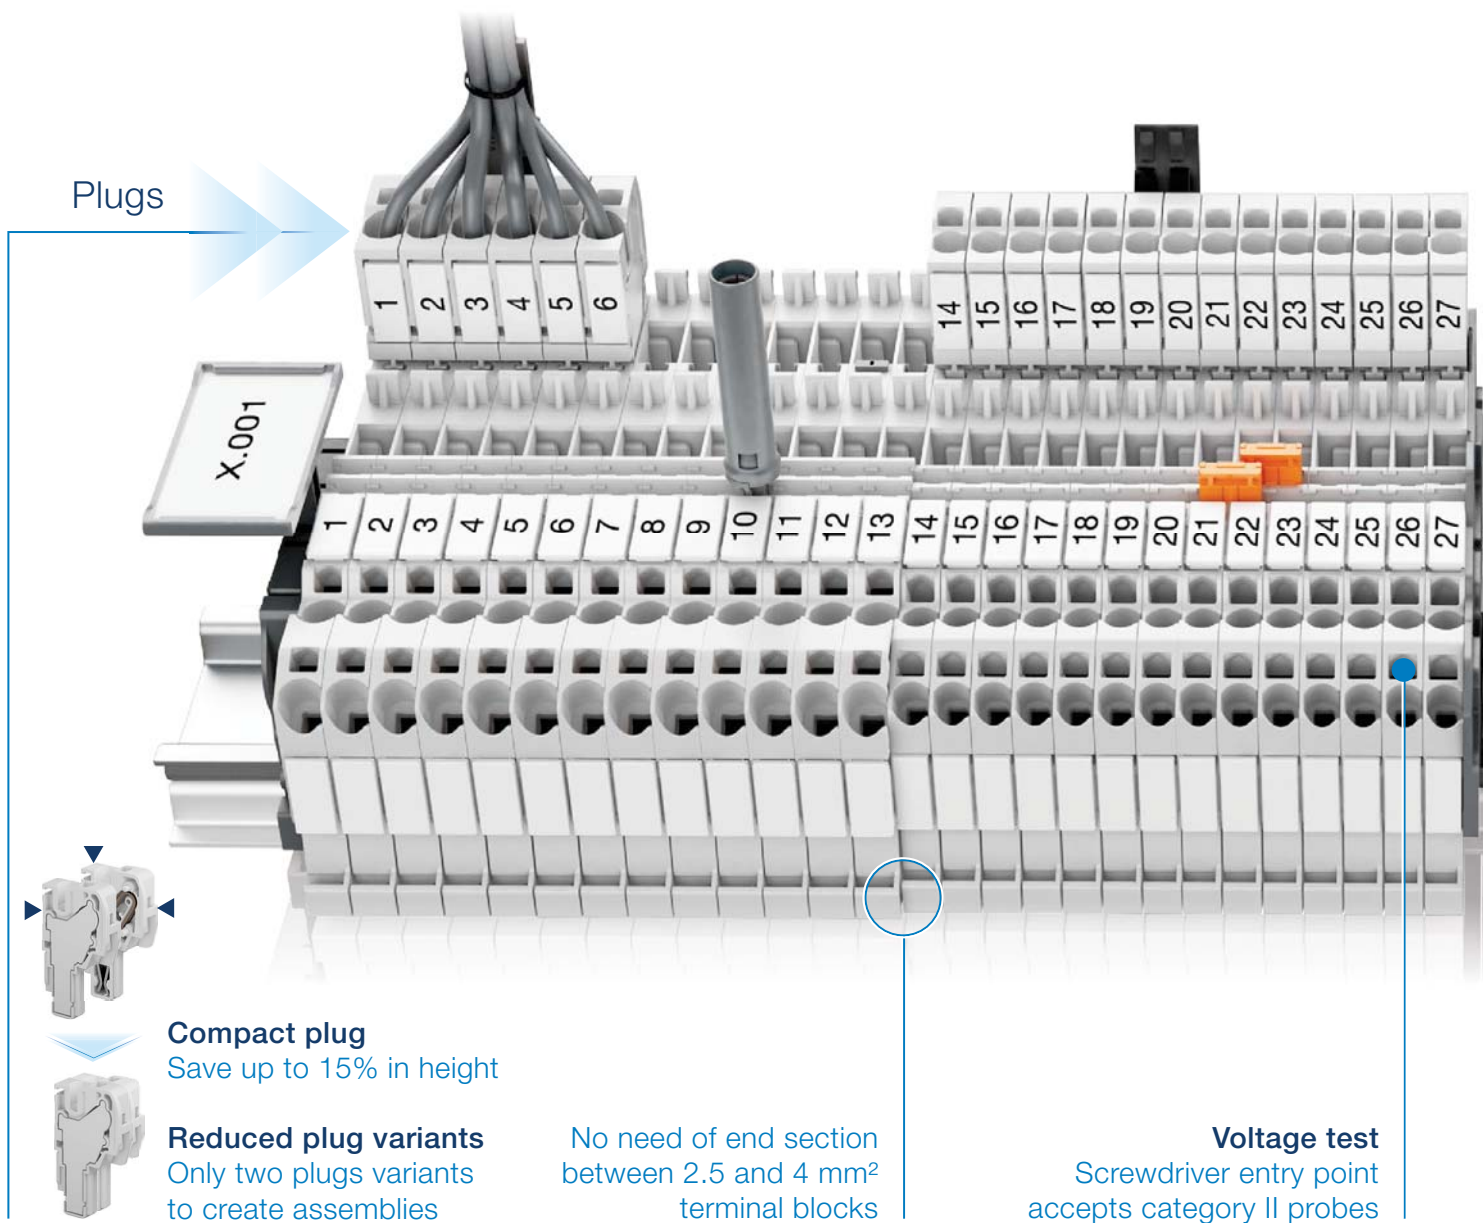

Screw clamp/Pluggable

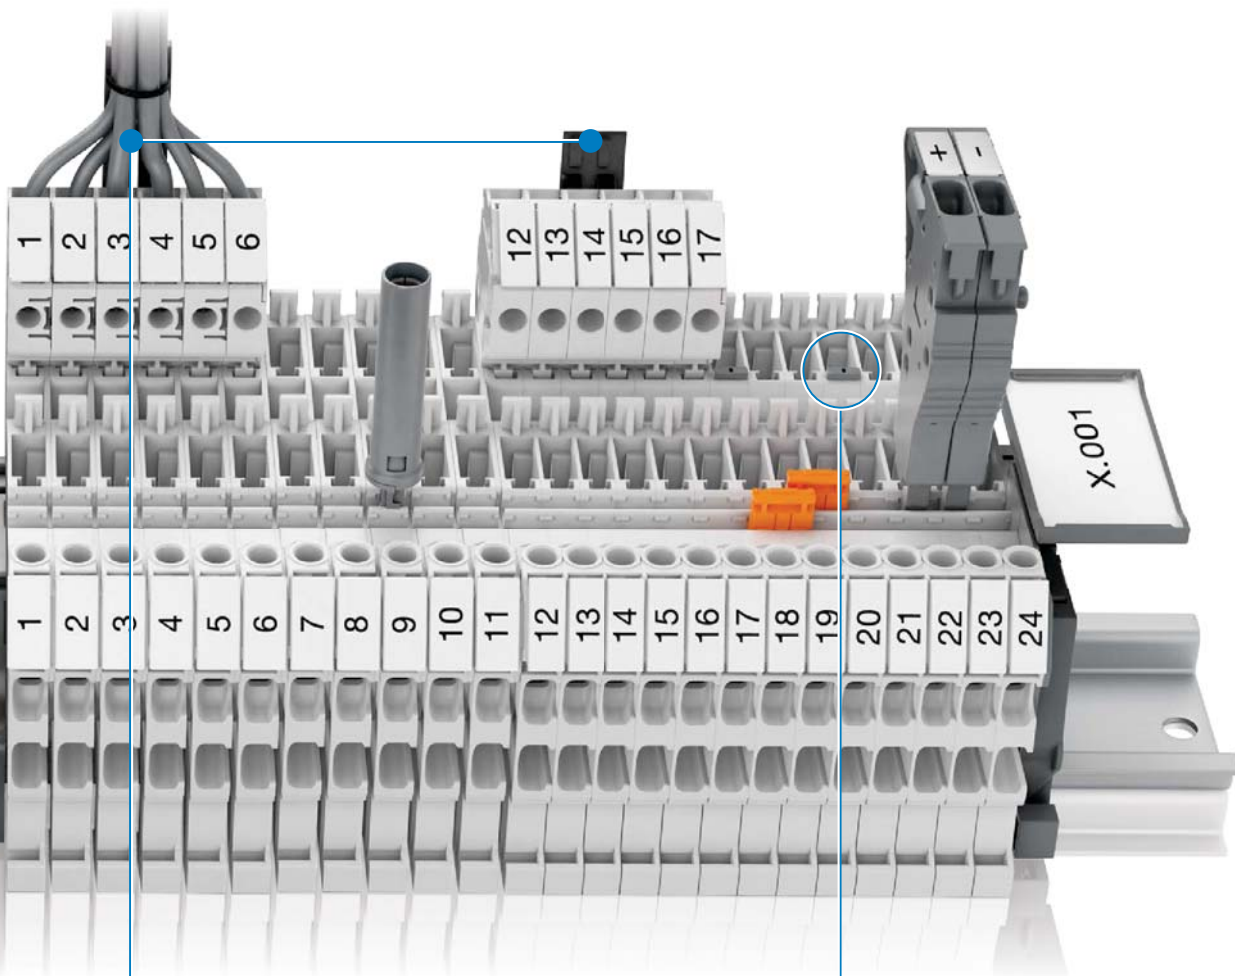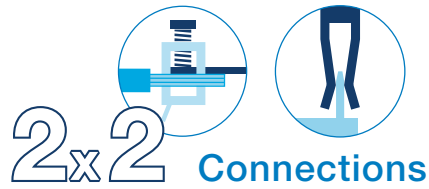

Locking devices
Secure wiring
against accidental
pulling



**Convenient
coding pegs**
Guarantee error free
plugs insertion

SNK series, terminal blocks

Pluggable

PI-Spring technology



Feed-through

Female plugs

Closed female plugs

Section				
2.5 mm ²	12 AWG	ZDK2.5-22	CDK2.5	CDK2.5-E
4 mm ²	10 AWG	ZDK4-22	CDK4	CDK4-E




Screw clamp technology








Feed-through

Female plugs

Closed female plugs


Section				
4 mm ²	10 AWG	ZDS4-22	CDS4	CDS4-E
		ZDS4-22-R1		CDS4-R1

 Clamp -
  Channels for jumpering or testing -
  Test socket -
  Blown-fuse indicator

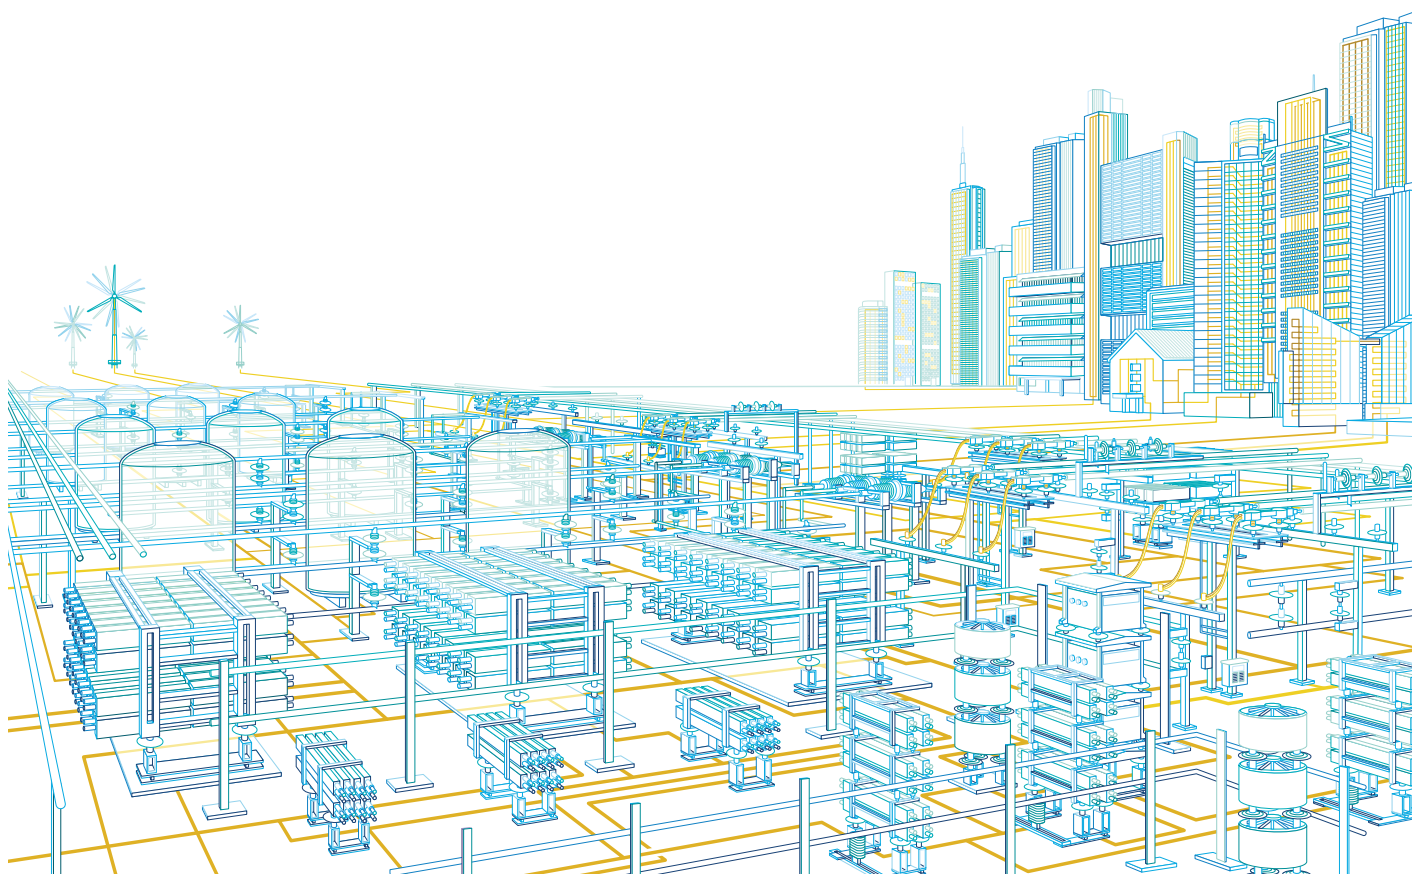


ZDK2.5-22 pluggable terminal blocks

PI-Spring - Feed-through - 5.2 mm 0.205 in spacing



ZDK2.5-22



5.2 mm 0.205 in spacing

Description

- Increase your productivity with pluggable terminal blocks: pre-produced plug harnesses save time and preparation with easily installed "plug and play" sub-assemblies, reduced transportation panels preparation and final installation, easily connect sub-assemblies together,
- Simplify and secure your installation: in site faulty connection errors are eliminated, prior connection testing is eased and reliable, test connectors (TC5) withstanding 10 000 operations are compatible for convenient testing.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through 4 connections	Grey <input type="checkbox"/>	ZDK2.5-22	1SNK805010R0000	50	9.6



Main technical data

Connecting capacity	IEC	UL - CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ² 26 ... 12 AWG
	Flexible	0.22 ... 2.5 mm ²
	with non insulated ferrule	0.22 ... 2.5 mm ² 26 ... 14 AWG
	with insulated ferrule	0.22 ... 2.5 mm ² 26 ... 14 AWG
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ² 26 ... 20 AWG
Rated current / Rated cross section		24 A / 2.5 mm ² 22 A / 12 AWG
Rated short-time withstand current (1s)		300 A
Rated voltage		1000 V 600 V
Impulse withstand voltage		8000 V
Protection		IP20 NEMA 1

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.433 in
Tool (for flexible conductor without ferrule)		Flat screwdriver Ø 3.5 mm Ø 0.138 in

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



CDK2.5 CDK2.5-E

Female plugs

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Female plugs 1 pole	Grey <input type="checkbox"/>	CDK2.5	1SNK805712R0000	50	2.8
Female plugs without outer nubs - Closed		CDK2.5-E	1SNK805713R0000	50	2.8

15 poles max.



Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce)	
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00	
2 End sections 2.2 mm 0.087 in	Dark grey <input type="checkbox"/>	EDK2.5-22	1SNK805910R0000	20	3.15	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles 32 A 30 A	JB5-2	1SNK905302R0000	50	1.30
		3 poles 32 A 30 A	JB5-3	1SNK905303R0000	50	2.00
		4 poles 32 A 30 A	JB5-4	1SNK905304R0000	50	2.70
		5 poles 32 A 30 A	JB5-5	1SNK905305R0000	50	3.50
		10 poles 32 A 30 A	JB5-10	1SNK905310R0000	30	7.10
		50 poles 32 A 30 A	JB5-50	1SNK905350R0000	10	36.00
4 Cross spacing jumpers 32 A 30 A	Orange <input type="checkbox"/>	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40	
6 Test adapters	Dark grey <input type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5	1SNK900200R0000	10	5.20	
		TC5-R1	1SNK900201R0000	10	5.20	
8 Coding pegs	Dark grey <input type="checkbox"/>	COP-ZD	1SNK900636R0000	10	3.57	
9 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.


CDK2.5 female plugs

PI-Spring - 5.2 mm 0.205 in spacing



CDK2.5

CDK2.5-E



5.2 mm 0.205 in spacing

Description

- Create your own female plug assemblies without any special tools: easily snap together multiple plugs for optimal ergonomics and quick assembly,
- Increase your flexibility: eliminate stock of pre-configured female plugs, easily add an extra plug in case of needed modification,
- Reduce your stock of unitary plugs up to 30%: only two plug variants are required to compose your own subsets of plugs from 2 to 15 poles.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Female plugs	Grey <input type="checkbox"/>	CDK2.5	1SNK805712R0000	50	2.8
Female plugs without outer nubs - Closed		CDK2.5-E	1SNK805713R0000	50	2.8


Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule	0.2 ... 4 mm ² 0.22 ... 2.5 mm ² 0.22 ... 2.5 mm ² 0.22 ... 2.5 mm ²	26 ... 12 AWG 26 ... 14 AWG 26 ... 14 AWG
2 conductors per clamp	Flexible with twin ferrule	0.22 ... 0.5 mm ²	26 ... 20 AWG
Rated current / Rated cross section	24 A / 2.5 mm ²	22 A / 12 AWG	
Rated short-time withstand current (1s)	300 A		
Rated voltage	1000 V	600 V	
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Mounting instructions

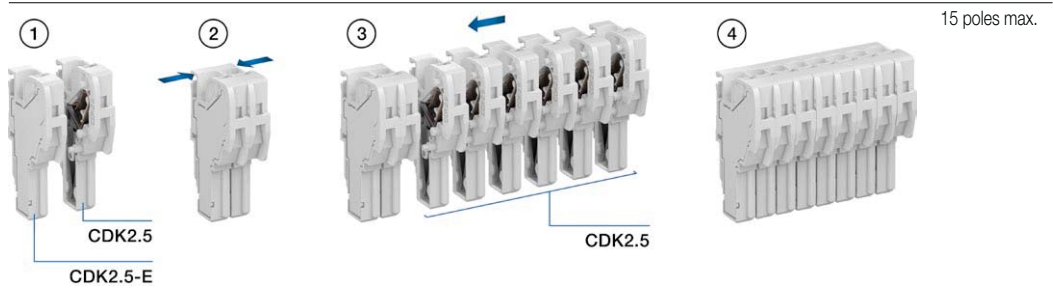

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g		
1 Locking devices	Black <input checked="" type="checkbox"/>	VR-ZD	1SNK900637R0000	50	6.5		
		VR-ZD-R1	1SNK900638R0000	50	1.04		
2 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00		
		MC512PA	1SNK149999R0000	20	10.00		
	White <input type="checkbox"/>	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
		Blank marker	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23
Blank strip label	White <input type="checkbox"/>	MG-CPMFA 43196	1SNB043196R0012	350	2.56		

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.
Technical data valid for copper conductors only.

ZDK4-22 pluggable terminal blocks

PI-Spring - Feed-through - 6 mm 0.236 in spacing




4 mm²
10 AWG



1SNK162094V0014

ZDK4-22



6 mm 0.236 in spacing

Description

- Increase your productivity with pluggable terminal blocks: pre-produced plugs harnesses save time and preparation with easily installed "plug and play" sub-assemblies,
- Simplify and secure your installation: in site faulty connection errors are eliminated, prior connection testing is eased and reliable, test connectors (TC5-R1 + ES-TC6) withstanding 10000 operations are compatible for convenient testing.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through 4 connections	Grey <input type="checkbox"/>	ZDK4-22	1SNK806010R0000	50	14.3


Main technical data

Connecting capacity		IEC	UL - CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5 ... 6 mm ²	26 ... 10 AWG
	Flexible	0.5 ... 4 mm ²	
	with non insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG
	with insulated ferrule	0.5 ... 4 mm ²	26 ... 12 AWG
2 conductors per clamp	Flexible with twin ferrule	0.5 ... 1 mm ²	26 ... 18 AWG
Rated current / Rated cross section		30 A / 4 mm ²	30 A / 10 AWG
Rated short-time withstand current (1s)		480 A	
Rated voltage		1000 V	600 V
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		12.5 mm 0.492 in
Tool (for flexible conductor without ferrule)		Flat screwdriver Ø 3.5 mm Ø 0.138 in

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



CDK4

CDK4-E

Female plugs

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Female plugs 1 pole	Grey <input type="checkbox"/>	CDK4	1SNK806712R0000	50	3.8
Female plugs without outer nubs - Closed		CDK4-E	1SNK806713R0000	50	4.5

15 poles max.

Accessories





Description	Color	Type	Order code	Pkg qty	Weight (1 pce)	
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00	
2 End sections 2.2 mm 0.087 in	Dark grey <input type="checkbox"/>	EDK2.5-22	1SNK805910R0000	20	3.15	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles 41 A 30 A	JB6-2	1SNK906302R0000	50	1.30
		3 poles 41 A 30 A	JB6-3	1SNK906303R0000	50	2.10
		4 poles 41 A 30 A	JB6-4	1SNK906304R0000	50	2.90
		5 poles 41 A 30 A	JB6-5	1SNK906305R0000	50	3.60
		10 poles 41 A 30 A	JB6-10	1SNK906310R0000	20	7.40
		50 poles 41 A 30 A	JB6-50	1SNK906350R0000	10	38.10
4 Cross spacing jumpers 32 A 30 A	Orange <input type="checkbox"/>	JB85-3	1SNK900603R0000	10	2.80	
5 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40	
6 Test adapters	Dark grey <input type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
7 Test connectors 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900201R0000	10	5.20	
8 Spacers 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900105R0000	10	0.80	
9 Coding pegs	Dark grey <input type="checkbox"/>	COP-ZD	1SNK900636R0000	10	3.57	
10 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

CDK4 female plugs

PI-Spring - 6 mm 0.236 in spacing



6 mm 0.236 in spacing

Description

- Create your own female plug assemblies without any special tools: easily snap together multiple plugs for optimal ergonomics and quick assembly,
- Increase your flexibility: eliminate stock of pre-configured female plugs, easily add an extra plug in case of needed modification,
- Reduce your stock of unitary plugs up to 30%: only two plug variants are required to compose your own subsets of plugs from 2 to 15 poles.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Female plugs	Grey <input type="checkbox"/>	CDK4	1SNK806712R0000	50	3.8
Female plugs without outer nubs - Closed		CDK4-E	1SNK806713R0000	50	4.5



Main technical data

Connecting capacity	IEC	UL - CSA	Mounting instructions
1 conductor per clamp	Rigid - Solid / Stranded Flexible with non insulated ferrule with insulated ferrule	0.5 ... 6 mm ² 0.5 ... 4 mm ² 26 ... 10 AWG 26 ... 12 AWG 26 ... 12 AWG	Rail Wire stripping length 12.5 mm 0.492 in
2 conductors per clamp	Flexible with twin ferrule	0.5 ... 1 mm ² 26 ... 18 AWG	Tool (for flexible conductor without ferrule) Flat screwdriver Ø 3.5 mm Ø 0.138 in
Rated current / Rated cross section	30 A / 4 mm ²	30 A / 10 AWG	
Rated short-time withstand current (1s)	480 A		
Rated voltage	1000 V	600 V	
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Mounting instructions

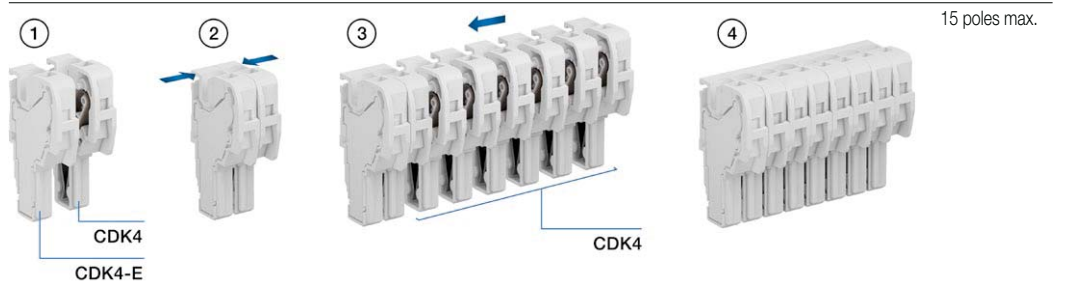

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g	
1 Locking devices	Black <input checked="" type="checkbox"/>	VR-ZD	1SNK900637R0000	50	6.5	
		VR-ZD-R1	1SNK900638R0000	50	1.04	
2 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00	
		MC612PA	1SNK159999R0000	20	11.00	
	White <input type="checkbox"/>	Universal wire markers holder	Grey <input type="checkbox"/> UMH	1SNK900611R0000	10	0.20
		Blank strip label	White <input type="checkbox"/> MG-CPMFA 43196	1SNB043196R0012	350	2.56
Blank marker	MG-CPM-13 41791	1SNB041791R0612	1680	0.27		

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZDS4-22 pluggable terminal blocks

Screw clamp - Feed-through - 5.2 mm 0.205 in spacing




4 mm²
10 AWG



1SNK161137V0014

ZDS4-22



5.2 mm 0.205 in spacing

Description

- Increase your productivity with pluggable terminal blocks: pre-produced plug harnesses save time and preparation with easily installed "plug and play" sub-assemblies, reduced transportation panels preparation and final installation, easily connect sub-assemblies together,
- Simplify and secure your installation: in site faulty connection errors are eliminated, prior connection testing is eased and reliable, test connectors (TC5) withstanding 10000 operations are compatible for convenient testing.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through 4 connections	Grey <input type="checkbox"/>	ZDS4-22	1SNK805013R0000	50	10.8

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail	TH 35-7.5, TH 35-15
	Flexible with non insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG	Wire stripping length	10.5 mm 0.413 in
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Gauge	0.22 ... 2.5 mm ²	24 ... 12 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	Flexible with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
	Rated current / Rated cross section	29 A / 4 mm ²	28 A / 10 AWG		
Rated short-time withstand current (1s)		480 A			
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		


The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Female plugs

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Female plugs 1 pole	Grey <input type="checkbox"/>	CDS4	1SNK805714R0000	50	3.9
Female plugs without outer nubs - Closed		CDS4-E	1SNK805715R0000	50	4.1

15 poles max.



CDS4

CDS4-E

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)	
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00	
2 End sections 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	EDS4-22	1SNK805911R0000	20	1.85	
3 Jumper bars	Orange <input type="checkbox"/>	2 poles 32 A 30 A	JB5-2	1SNK905302R0000	50	1.30
		3 poles 32 A 30 A	JB5-3	1SNK905303R0000	50	2.00
		4 poles 32 A 30 A	JB5-4	1SNK905304R0000	50	2.70
		5 poles 32 A 30 A	JB5-5	1SNK905305R0000	50	3.50
		10 poles 32 A 30 A	JB5-10	1SNK905310R0000	30	7.10
		50 poles 32 A 30 A	JB5-50	1SNK905350R0000	10	36.00
4 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40	
5 Test adapters	Dark grey <input type="checkbox"/>	For test plugs DIA 2 mm 0.079 in	TP2	1SNK900203R0000	20	1.70
		For test plugs DIA 4 mm 0.157 in	TP4	1SNK900205R0000	20	2.40
6 Test connectors 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5	1SNK900200R0000	10	5.20	
		TC5-R1	1SNK900201R0000	10	5.20	
		COP-ZD	1SNK900636R0000	10	3.57	
7 Coding pegs	Dark grey <input type="checkbox"/>					
8 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00	
		MC512PA	1SNK149999R0000	20	10.00	
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20	
	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23	




Complete list of accessories is indicated in the terminal block datasheet including end stops.

Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.
Technical data valid for copper conductors only.

CDS4 female plugs

Screw clamp - 5.2 mm 0.205 in spacing



Description

- Create your own female plug assemblies without any special tools: easily snap together multiple plugs for optimal ergonomics and quick assembly,
- Increase your flexibility: eliminate stock of pre-configured female plugs, easily add an extra plug in case of needed modification,
- Reduce your stock of unitary plugs up to 30%: only two plug variants are required to compose your own subsets of plugs from 2 to 15 poles.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Female plugs	Grey <input type="checkbox"/>	CDS4	1SNK805714R0000	50	3.9
Female plugs without outer nubs - Closed		CDS4-E	1SNK805715R0000	50	4.1


Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions		
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Rail		10.5 mm 0.413 in
	Flexible	0.22 ... 4 mm ²	24 ... 10 AWG			
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG	Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in
	with insulated ferrule	0.22 ... 2.5 mm ²	24 ... 12 AWG			
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Torque		0.6 N.m ± 0.1 5.31 lb.in ± 0.885
	Flexible with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG			
Rated current / Rated cross section		29 A / 4 mm ²	28 A / 10 AWG			
Rated short-time withstand current (1s)		480 A				
Rated voltage		800 V	300 V			
Impulse withstand voltage		8000 V				
Protection		IP20	NEMA 1			

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Mounting instructions

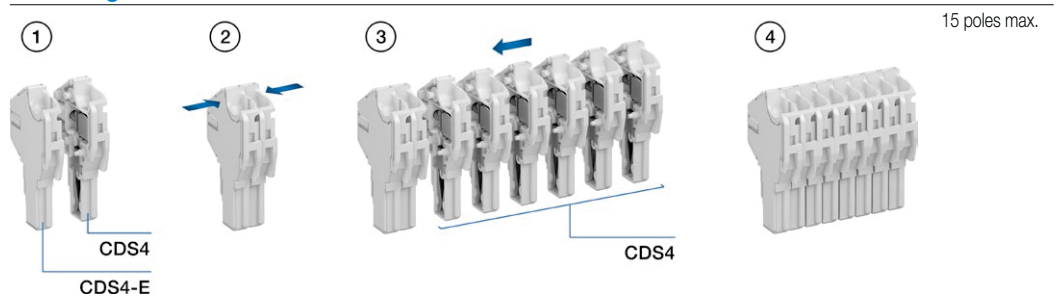

Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g		
1 Locking devices	Black <input type="checkbox"/>	VR-ZD	1SNK900637R0000	50	6.5		
		VR-ZD-R1	1SNK900638R0000	50	1.04		
2 Terminal block markers	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00		
		MC512PA	1SNK149999R0000	20	10.00		
	White <input type="checkbox"/>	Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
		Blank marker	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.23
Blank strip label		MG-CPMFA 43196	1SNB043196R0012	350	2.56		

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.


All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

ZDS4-22-R1 pluggable terminal blocks

Screw clamp - Feed-through - 6 mm 0.236 in spacing



ZDS4-22-R1



6 mm 0.236 in spacing

Description

- Increase your productivity with pluggable terminal blocks: pre-produced plugs harnesses save time and preparation with easily installed "plug and play" sub-assemblies,
- Simplify and secure your installation: in site faulty connection errors are eliminated, prior connection testing is eased and reliable, test connectors (TC5-R1 + ES-TC6) withstanding 10000 operations are compatible for convenient testing.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through 4 connections	Grey <input type="checkbox"/>	ZDS4-22-R1	1SNK806013R0000	40	12.6 g


Main technical data

Connecting capacity		IEC	UL - CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG
	Flexible	0.22 ... 4 mm ²	24 ... 10 AWG
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG
	with insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG
Gauge		A3-B3	
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG
	Flexible	0.22 ... 1.5 mm ²	24 ... 16 AWG
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG
Rated current / Rated cross section		29 A / 4 mm ²	28 A / 10 AWG
Rated short-time withstand current (1s)		480 A	
Rated voltage		800 V	300 V
Impulse withstand voltage		8000 V	
Protection		IP20	NEMA 1

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		10.5 mm 0.413 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in
Torque		0.6 N.m ± 0.1 5.31 lb.in ± 0.885

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



CDS4-R1 CDS4-E

Female plugs

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Female plugs 1 pole	Grey <input type="checkbox"/>	CDS4-R1	1SNK806714R0000	50	4.1 g
Female plugs without outer nubs - Closed		CDS4-E	1SNK805715R0000	50	4.1 g

15 poles max.



Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce)	
1 End stops 10 mm 0.394 in	Dark grey <input type="checkbox"/>	BAM3	1SNK900001R0000	50	14.00 g	
2 Jumper bars	Orange <input type="checkbox"/>	2 poles 41 A 30 A	JB6-2	1SNK906302R0000	50	1.30 g
		3 poles 41 A 30 A	JB6-3	1SNK906303R0000	50	2.10 g
		4 poles 41 A 30 A	JB6-4	1SNK906304R0000	50	2.90 g
		5 poles 41 A 30 A	JB6-5	1SNK906305R0000	50	3.60 g
		10 poles 41 A 30 A	JB6-10	1SNK906310R0000	20	7.40 g
		50 poles 41 A 30 A	JB6-50	1SNK906350R0000	10	38.10 g
3 Circuit separators 3 mm 0.118 in	Dark grey <input type="checkbox"/>	CS-R3	1SNK900107R0000	20	6.40 g	
		TP2	1SNK900203R0000	20	1.70 g	
4 Test adapters	Dark grey <input type="checkbox"/>	TP4	1SNK900205R0000	20	2.40 g	
		For test plugs DIA 2 mm 0.079 in	TP2	1SNK900201R0000	10	5.20 g
5 Test connectors 5.2 mm 0.205 in	Dark grey <input type="checkbox"/>	TC5-R1	1SNK900105R0000	10	0.80 g	
6 Spacers 0.8 mm 0.031 in	Dark grey <input type="checkbox"/>	ES-TC6	1SNK900636R0000	10	3.57 g	
7 Coding pegs	Dark grey <input type="checkbox"/>	COP-ZD	1SNK150000R0000	22	10.00 g	
8 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	20	11.00 g	
	Grey <input type="checkbox"/>	MC612PA	1SNK159999R0000	10	0.20 g	
	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27 g	

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in *italics*. Technical data valid for copper conductors only.

CDS4-R1 female plugs

Screw clamp - 6 mm 0.236 in spacing



Description

- Create your own female plug assemblies without any special tools: easily snap together multiple plugs for optimal ergonomics and quick assembly,
- Increase your flexibility: eliminate stock of pre-configured female plugs, easily add an extra plug in case of needed modification,
- Reduce your stock of unitary plugs up to 30%: only two plug variants are required to compose your own subsets of plugs from 2 to 15 poles.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Female plugs	Grey <input type="checkbox"/>	CDS4-R1	1SNK806714R0000	50	4.1
Female plugs without outer nubs - Closed		CDS4-E	1SNK805715R0000	50	4.1



Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 4 mm ²	24 ... 10 AWG	Wire stripping length	10.5 mm 0.413 in
	Flexible	0.22 ... 4 mm ²	24 ... 10 AWG		
	with non insulated ferrule	0.22 ... 4 mm ²	24 ... 10 AWG		
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²	24 ... 16 AWG	Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	Flexible	0.22 ... 1.5 mm ²	24 ... 16 AWG		
	with twin ferrule	0.22 ... 1.5 mm ²	24 ... 16 AWG		
Rated current / Rated cross section		29 A / 4 mm ²	28 A / 10 AWG	Torque	0.6 N.m ± 0.1 5.31 lb.in ± 0.885
Rated short-time withstand current (1s)		480 A			
Rated voltage		800 V	300 V		
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>



Mounting instructions

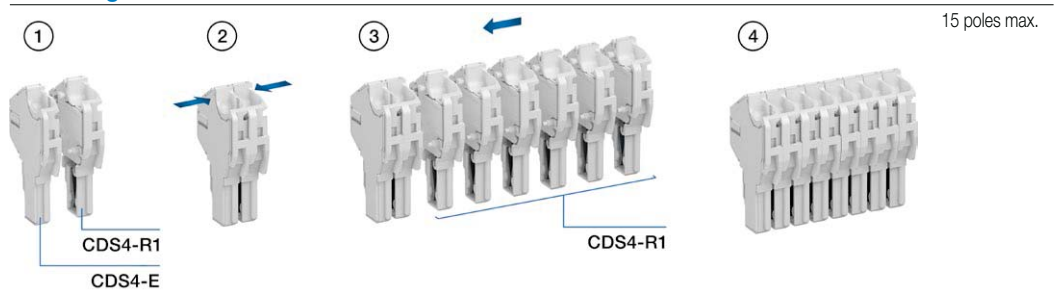


Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 Locking devices	Black <input checked="" type="checkbox"/>	VR-ZD	1SNK900637R0000	50	6.5
		VR-ZD-R1	1SNK900638R0000	50	1.04
2 Terminal block markers	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00
		MC612PA	1SNK159999R0000	20	11.00
	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20
		MG-CPMFA 43196	1SNB043196R0012	350	2.56
Blank marker	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.27

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings: Complete information available in the accessories section of the catalog.

All the technical data for UL/CSA standard and dimensions in inches are in italic. Technical data valid for copper conductors only.

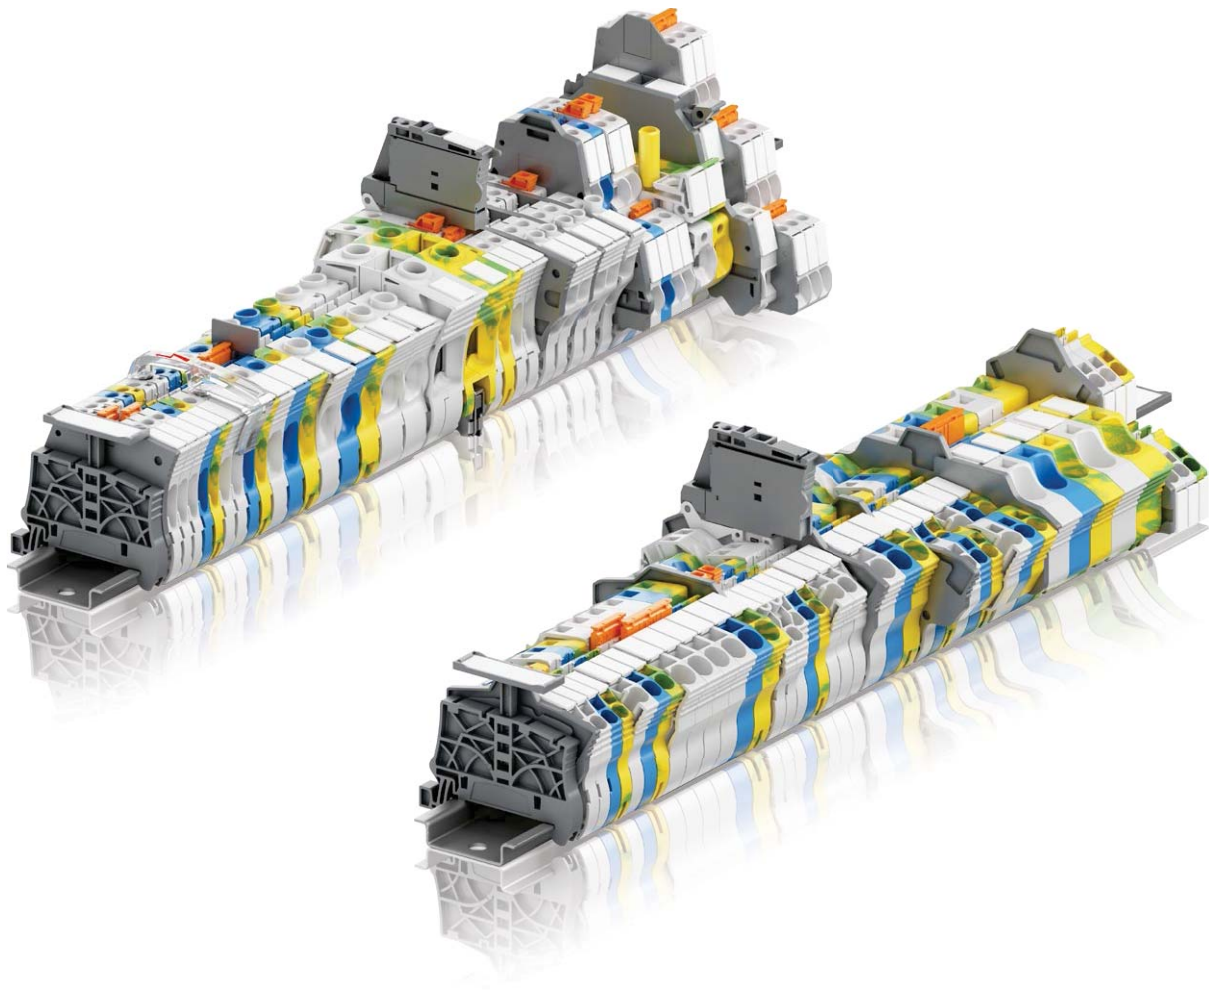

SNK series, terminal block accessories



Common terminal block accessories

Mounting rail	PR	150
Screw end stops	BAM3, BAZH1	153
Screwless end stops	BAZ1	154
Label holders	LH-R1, LH	155
Screwless jumper bars	JB5	156
	JB6	157
	JB8	158
	JB10	159
	JB12	160
Cross spacing jumpers	JB85-3	161
Test adapters	TP2, TP4	162
Test connectors	TC5	163
Component plugs	PG5-R2	164
	PG5, PG5-R1	165
Screwdrivers	TO	166
Crimping tools	PS	166

PI-Spring terminal block accessories

End sections	EK	167
Circuit separators	CS-R2, CS-R3	169
Shield connectors	SHB, SHBP	170

Screw clamp terminal block accessories

End sections	ES	171
Screw jumper bars	JB8	173
	JB16, JB22	174
	JB26	175
Lateral jumper bars	PC8	176
Circuit separator	CS, CS-R1	177
Shield connectors	SHB, SHBS	178
Protecting covers	PL	179
	CO, KCO	180
Short circuit bridges	SC-JB8	181
Test sockets	AJS9	182

Pluggable terminal block accessories


End sections	EDK, EDS	183
Coding pegs	COP	184
Locking devices	VR	184

PR mounting rail

Common terminal block accessories



PR30



2000 mm 78 in spacing

Description

- Prepunched symmetrical mounting rail,
- The oblong holes ease the mounting and allow to use existing and/or numerous fixings,
- Particularly well designed for fixing onto back-plates and for terminal assemblies of small dimensions.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Prepunched rail		PR30	1SNA173220R0500	2	328.00


Please note that for all rails: 1 part number equal 1 meter (39 in). Packing of 2 meters (78 in) minimum. Check that your order quantity is a multiple of 2.

Main technical data


Material	Zinc plating and passivation steel				
Rail					
	IEC	UL - CSA			
Equivalent E-Cu cross section	All the main technical data provided are "manufacturer" values.				
RoHS	RoHS				

Mounting instructions

- in order to guarantee the performances and security of your installation, please ensure the rail and its fixings can withstand the static and dynamic loads of the components mounted on it;
- to prevent the rail from flexing (1 mm 0.039 in rail thickness only), fixing is recommended every 250 mm 9.84 in;
- to prevent any issues during mounting, screw heads used for rail fixing should not protrude from the rail (7,5 mm 0.295 in rail height only).



PR3.Z2



2000 mm 78 in spacing

Description

- Symmetrical mounting rail complying with IEC60715,
- Particularly well designed for fixing onto back-plates and for terminal assemblies of small dimensions.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
		PR3.Z2	1SNA174300R1700	2	

Please note that for all rails: 1 part number equal 1 meter (39 in). Packing of 2 meters (78 in) minimum. Check that your order quantity is a multiple of 2.

Main technical data

Material	Zinc plating and passivation steel				
Rail	TH 35-7.5				
	IEC	UL - CSA			
Equivalent E-Cu cross section	All the main technical data provided are "manufacturer" values.				
	16 mm ²	4 AWG			
RoHS	RoHS				


Mounting instructions

- in order to guarantee the performances and security of your installation, please ensure the rail and its fixings can withstand the static and dynamic loads of the components mounted on it;
- to prevent the rail from flexing (1 mm 0.039 in rail thickness only), fixing is recommended every 250 mm 9.84 in;
- to prevent any issues during mounting, screw heads used for rail fixing should not protrude from the rail (7,5 mm 0.295 in rail height only).

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.



PR mounting rail

Common terminal block accessories



1SNK600078F0000

PR3.G2



2000 mm 78 in spacing

Description

- Symmetrical mounting rail made of galvanised steel, complying with IEC60715,
- Particularly well designed for fixing onto back-plates and for terminal assemblies of small dimensions.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
		PR3.G2	1SNA164800R0300	2	

Please note that for all rails: 1 part number equal 1 meter (39 in). Packing of 2 meters (78 in) minimum. Check that your order quantity is a multiple of 2.

Main technical data

Material	Galvanised steel				
Rail	TH 35-7.5				
	IEC	UL - CSA			
Equivalent E-Cu cross section	16 mm ²	4 AWG			

All the main technical data provided are "manufacturer" values.

RoHS
RoHS


Mounting instructions

- in order to guarantee the performances and security of your installation, please ensure the rail and its fixings can withstand the static and dynamic loads of the components mounted on it;
- to prevent the rail from flexing (1 mm 0.039 in rail thickness only), fixing is recommended every 250 mm 9.84 in;
- to prevent any issues during mounting, screw heads used for rail fixing should not protrude from the rail (7,5 mm 0.295 in rail height only).



1SNK600074F0000

PR50

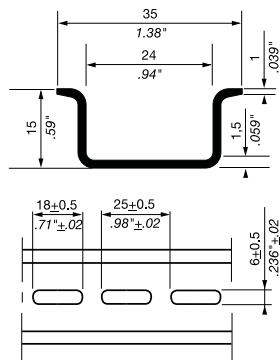

2000 mm 78 in spacing

Description

- Prepunched symmetrical mounting rail,
- The oblong holes ease the mounting and allow to use existing and/or numerous fixings.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Prepunched rail		PR50	1SNA178529R0400	2	1288.00

Please note that for all rails: 1 part number equal 1 meter (39 in). Packing of 2 meters (78 in) minimum. Check that your order quantity is a multiple of 2.

Main technical data

Material	Zinc plating and passivation steel				
Rail					
	IEC	UL - CSA			
Equivalent E-Cu cross section					

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Mounting instructions

- in order to guarantee the performances and security of your installation, please ensure the rail and its fixings can withstand the static and dynamic loads of the components mounted on it;
- to prevent the rail from flexing, fixing is recommended every 500 mm 19.7 in;
- in order to increase the accessibility of your terminal assembly, we recommend the use of our rail offset brackets EM45 (order code 1SNA008521R2600) for a 45° orientation of the rail.

All the technical data for UL/CSA standard and dimensions in inches are in italic.


PR mounting rail

Common terminal block accessories




1SNK00075F0000

PR5



5



2000 mm 78 in spacing

Description

Symmetrical mounting rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
		PR5	1SNA168700R2200	2	

Please note that for all rails: 1 part number equal 1 meter (39 in). Packing of 2 meters (78 in) minimum. Check that your order quantity is a multiple of 2.

Main technical data

Material	Zinc plating and passivation steel				
Rail					
	IEC	UL - CSA			
Equivalent E-Cu cross section	All the main technical data provided are "manufacturer" values.				
RoHS	RoHS				


Mounting instructions

- in order to guarantee the performances and security of your installation, please ensure the rail and its fixings can withstand the static and dynamic loads of the components mounted on it;
- to prevent the rail from flexing, fixing is recommended every 500 mm 19.7 in;
- in order to increase the accessibility of your terminal assembly, we recommend the use of our rail offset brackets EM45 (order code 1SNA008521R2600) for a 45° orientation of the rail.



1SNK00076F0000

PR4



2000 mm 78 in spacing

Description

- Symmetrical mounting rail complying with IEC60715,
- The rigidity of the rail is maximised by the 2.3 mm 0.090 in thickness of the rail, and by its solid, non slotted construction,
- PR4 TH 35-15 is the most rigid mounting rail solution and it can support any electrical devices.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Recommended for SNK ground terminal blocks up to 35 mm ² 2 AWG		PR4	1SNA168500R1200	2	915.00

Please note that for all rails: 1 part number equal 1 meter (39 in). Packing of 2 meters (78 in) minimum. Check that your order quantity is a multiple of 2.

Main technical data

Material	Zinc plating and passivation steel				
Rail	TH 35-15				
	IEC	UL - CSA			
Equivalent E-Cu cross section	50 mm ² 0 AWG				
	All the main technical data provided are "manufacturer" values.				
RoHS	RoHS				

Mounting instructions

- in order to guarantee the performances and security of your installation, please ensure the rail and its fixings can withstand the static and dynamic loads of the components mounted on it;
- to prevent the rail from flexing, fixing is recommended every 700 mm 27.6 in;
- in order to increase the accessibility of your terminal assembly, we recommend the use of our rail offset brackets EM45 (order code 1SNA008521R2600) for a 45° orientation of the rail.


All the technical data for UL/CSA standard and dimensions in inches are in italic.

Screw end stops

Common terminal block accessories



BAM3




10 mm 0.394 in spacing

Mounting instructions



BAZH1



10 mm 0.394 in spacing

BAM3 screw end stops

Description

- Give efficient support to the SNK terminal blocks assemblies thanks to the BAM3 double gripping rail contact,
- Ease the assemblies identification with the BAM3 marking location compatible with all SNK markers and labels.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
10 mm 0.394 in spacing	Dark grey	BAM3	1SNK900001R0000	50	13.80

Main technical data

Material specifications	Insulating material	Polyamide	Rail		TH 35-7.5, TH 35-15
Flammability	V0		Tool		Flat screwdriver Ø 5.5 mm Ø 0.217 in
NF F 16 101	I2F2		Torque		1.3 N.m ± 0.1 11.44 lb.in ± 0.88
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C -67 ... +230 °F			
	Storage	-55 ... +110 °C -67 ... +230 °F			
	Installing	-5 ... +40 °C 23 ... +104 °F			

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Blank card	In polycarbonate	White <input type="checkbox"/>	MC812	22	10.00
	In polyamide		MC812PA	20	14.00
Label holder	10 mm 0.394 in width	Dark grey <input checked="" type="checkbox"/>	LH	50	0.60
	19.5 mm 0.768 in width		LH-R1	50	1.08
Universal wire markers holder	5.2 mm 0.205 in spacing	Grey <input type="checkbox"/>	UMH	10	0.20
Self adhesive strip	For 8 mm 0.315 in spacing terminal blocks	White <input type="checkbox"/>	SAT8	5	6.00

BAZH1 screw end stops

Description

- Give efficient support to the SNK double deck or power terminal blocks assemblies thanks to the BAZH1 double gripping rail contact,
- Ease the assemblies identification with label holders.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
10 mm 0.394 in spacing	Dark grey	BAZH1	1SNK900102R0000	20	23.90

Main technical data

Material specifications	Insulating material	Polyamide	Rail		TH 35-7.5, TH 35-15
Flammability	V0		Tool		Flat screwdriver Ø 5.5 mm Ø 0.217 in
NF F 16 101	I2F2		Torque		1.3 N.m ± 0.1 11.44 lb.in ± 0.88
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C -67 ... +230 °F			
	Storage	-55 ... +110 °C -67 ... +230 °F			
	Installing	-5 ... +40 °C 23 ... +104 °F			

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Label holder	10 mm 0.394 in width	Dark grey <input checked="" type="checkbox"/>	LH	50	0.60
	19.5 mm 0.768 in width		LH-R1	50	1.08

All the technical data for UL/CSA standard and dimensions in inches are in italic.


Screwless end stops

Common terminal block accessories



1SNK1600600014

BAZ1



5.2 mm 0.205 in spacing

BAZ1 screwless end stops

Description

- Reduce the size of your terminal block assemblies with the screwless reduced spacing BAZ1 end stop,
- Ease the assemblies identification with various markers and label holders.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
5.2 mm 0.205 in spacing	Dark grey <input checked="" type="checkbox"/>	BAZ1	1SNK900002R0000	50	5.30

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	23 ... +104 °F

Mounting instructions

Rail		TH 35-7,5, TH 35-15
Tool		
Torque		

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Blank card	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
Label holder	Dark grey <input checked="" type="checkbox"/>	LH	1SNK900605R0000	50	0.60
		LH-R1	1SNK900607R0000	50	1.08
Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Label holders

Common terminal block accessories



1SNK160019R0014

LH-R1
19.5 mm 0.768 in spacing

Mounting instructions



LH-R1 label holders

Description

- Easily identify your terminal blocks assembly with white or yellow labels,
- Adjustable in height for best visibility,
- Compatible with all SNK end stops.

Ordering details

Description	Color	Type	Order code	Pkg	Weight
19.5 mm 0.768 in width	Dark grey <input checked="" type="checkbox"/>	LH-R1	1SNK900607R0000	50 qty	1.08 (1 pce) g

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	23 ... +104 °F

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Accessories

Description	Color	Type	Order code	Pkg	Weight
Label For LH-R1 label holder	White <input type="checkbox"/>	MCLH-R1	1SNK900631R0000	25 qty	10.00 (1 pce) g
	Yellow <input checked="" type="checkbox"/>	MCLH-R1-YL	1SNK900634R0000	25	10.00



1SNK160020R0014

LH
10 mm 0.394 in spacing

LH label holders

Description

- Easily identify your terminal blocks assembly with white or yellow labels,
- Adjustable in height for best visibility,
- Compatible with all SNK end stops.

Ordering details

Description	Color	Type	Order code	Pkg	Weight
10 mm 0.394 in width	Dark grey <input checked="" type="checkbox"/>	LH	1SNK900605R0000	50 qty	0.60 (1 pce) g

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	23 ... +104 °F

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Accessories

Description	Color	Type	Order code	Pkg	Weight
Label For LH label holder	White <input type="checkbox"/>	MCLH	1SNK900630R0000	25 qty	10.00 (1 pce) g
	Yellow <input checked="" type="checkbox"/>	MCLH-YL	1SNK900633R0000	25	10.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.

JB5 screwless jumper bars

Common terminal block accessories



1SNK160143F0014

JB5

5.2 mm 0.205 in spacing

5

Description

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for alternated jumpering between terminal blocks,
- Insulated,
- Positive locking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
5.2 mm 0.205 in spacing	Orange	JB5-2	1SNK905302R0000	50	1.30
		JB5-3	1SNK905303R0000	50	2.00
		JB5-4	1SNK905304R0000	50	2.70
		JB5-5	1SNK905305R0000	50	3.50
		JB5-10	1SNK905310R0000	30	7.10
		JB5-50	1SNK905350R0000	10	36.10

Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F3		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
		IEC	UL - CSA	Ex e
Rated current		32 A	30 A	
Rated voltage	Standard use	1000 V	600 V	Please consult our dedicated certificates
	Cut extremities	800 V	300 V	
	Cut poles	400 V	300 V	
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


All the main technical data provided are "manufacturer" values.

RoHS									
------	--	--	--	--	--	--	--	--	--

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Circuit separators	Dark grey	CS	1SNK900101R0000	20	0.20

Mounting instructions

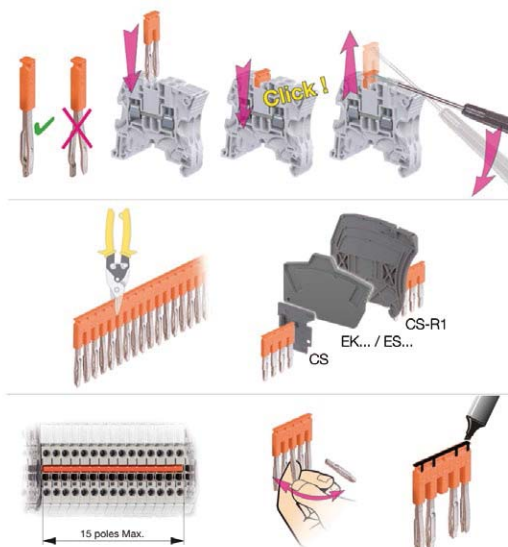

Additional accessories must be installed on the cut side of the jumper bar with cut extremities:

	Feed-through	Double-deck	Others
ZS	CS	ES...	CS-R1
ZK		EK...	

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

JB6 screwless jumper bars

Common terminal block accessories



1SNK160143P014

JB6

6 mm 0.236 in spacing

Description

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for alternated jumpering between terminal blocks,
- Insulated,
- Positive locking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
6 mm 0.236 in spacing	Orange	JB6-2	1SNK906302R0000	50	1.30
		JB6-3	1SNK906303R0000	50	2.10
		JB6-4	1SNK906304R0000	50	2.90
		JB6-5	1SNK906305R0000	50	3.60
		JB6-10	1SNK906310R0000	20	7.40
		JB6-50	1SNK906350R0000	10	38.10

Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F3		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	

	IEC	UL - CSA	Ex e
Rated current	41 A	30 A	
Rated voltage	Standard use	1000 V	630 V
	Cut extremities	800 V	400 V
	Cut poles	400 V	300 V
Impulse withstand voltage	8000 V		Consult us
Protection	IP20	NEMA 1	

All the main technical data provided are "manufacturer" values.

RoHS																			
RoHS																			

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Circuit separators	Dark grey	CS	1SNK900101R0000	20	0.20

Mounting instructions



Additional accessories must be installed on the cut side of the jumper bar with cut extremities:

	Feed-through	Double-deck	Others
ZS	CS	ES...	CS-R1
ZK		EK...	

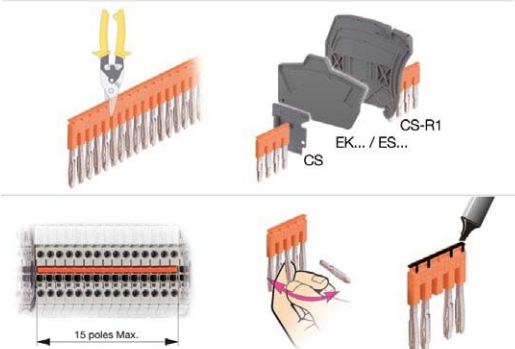

All the technical data for UL/CSA standard and dimensions in inches are in italic.

JB8 screwless jumper bars

Common terminal block accessories



1SNK160148R0014

JB8

8 mm 0.315 in spacing

Description

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for alternated jumpering between terminal blocks,
- Insulated,
- Positive locking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
8 mm 0.315 in spacing	Orange	JB8-2	1SNK908302R0000	50	2.70
		JB8-3	1SNK908303R0000	50	4.10
		JB8-4	1SNK908304R0000	50	5.60
		JB8-5	1SNK908305R0000	40	7.00
		JB8-10	1SNK908310R0000	20	14.20

Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
Ambient temperature min/max	NF F 16 101	I2F3		
	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
Rated current		IEC 57 A	UL - CSA 42 A	Ex e
Rated voltage	Standard use	1000 V	600 V	Please consult our dedicated certificates
	Cut extremities	800 V	300 V	
	Cut poles	400 V	300 V	
Impulse withstand voltage		6000 V		
Protection		IP20	NEMA 1	


All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Circuit separators	Dark grey	CS	1SNK900101R0000	20	0.20

Mounting instructions

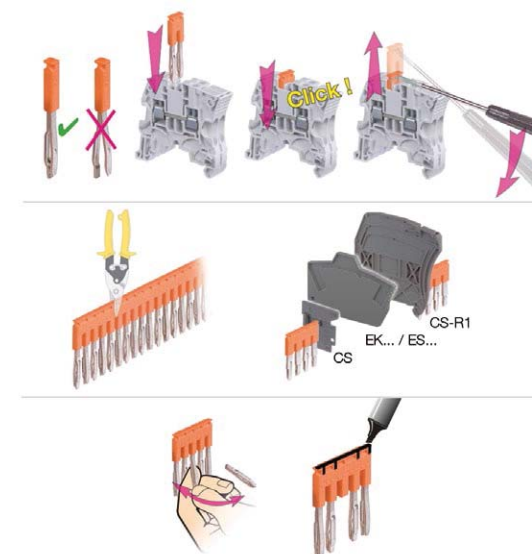

Additional accessories must be installed on the cut side of the jumper bar with cut extremities:

	Feed-through	Double-deck	Others
ZS	CS	ES...	CS-R1
ZK		EK...	

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

JB10 screwless jumper bars

Common terminal block accessories



1SNK160146F0014

JB10

10 mm 0.394 in spacing

Description

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for alternated jumpering between terminal blocks,
- Insulated,
- Positive locking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
10 mm 0.394 in spacing	Orange	JB10-2	1SNK910302R0000	50	4.60
		JB10-3	1SNK910303R0000	50	7.10
		JB10-4	1SNK910304R0000	40	9.40
		JB10-5	1SNK910305R0000	30	12.00
		JB10-10	1SNK910310R0000	20	24.00

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
Ambient temperature min/max	NF F 16 101	I2F3	
	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	-23 ... +104 °F

	IEC	UL - CSA	Ex e
Rated current	76 A	42 A	
Rated voltage	Standard use	1000 V	600 V
	Cut extremities	800 V	300 V
	Cut poles	400 V	300 V
Impulse withstand voltage	6000 V		
Protection	IP20	NEMA 1	

All the main technical data provided are "manufacturer" values.

RoHS									
------	--	--	--	--	--	--	--	--	--



Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Circuit separators	Dark grey	CS	1SNK900101R0000	20	0.20

Mounting instructions



Additional accessories must be installed on the cut side of the jumper bar with cut extremities:

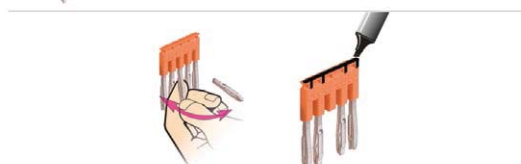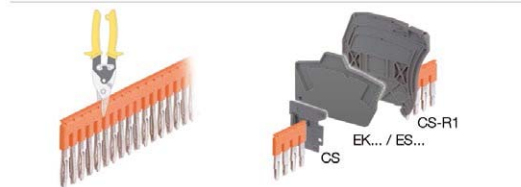

	Feed-through	Double-deck	Others
ZS	CS	ES...	CS-R1
ZK		EK...	

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

JB12 screwless jumper bars

Common terminal block accessories



1SNK160239W0014

JB12

12 mm 0.472 in Spacing

Description

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Insulated,
- Positive locking.

Ordering Details

Description	Color	Type	Order Code	Pkg qty	Weight (1 pce) g
12 mm 0.472 in spacing 2 poles 3 poles 5 poles	Orange ■	JB12-2	1SNK912302R0000	50	4.86
		JB12-3	1SNK912303R0000	50	7.55
		JB12-5	1SNK912305R0000	20	12.93


Main Technical Data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F2		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	23 ... +104 °F	
		IEC	UL - CSA	Ex e
Rated current		76 A	67 A	
Rated voltage	Standard use	1000 V	600 V	Please consult our dedicated certificates
	Cut extremities	800 V	300 V	
	Cut poles	400 V	300 V	
Impulse withstand voltage		6000 V		
Protection		IP20	NEMA 1	

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Mounting instructions

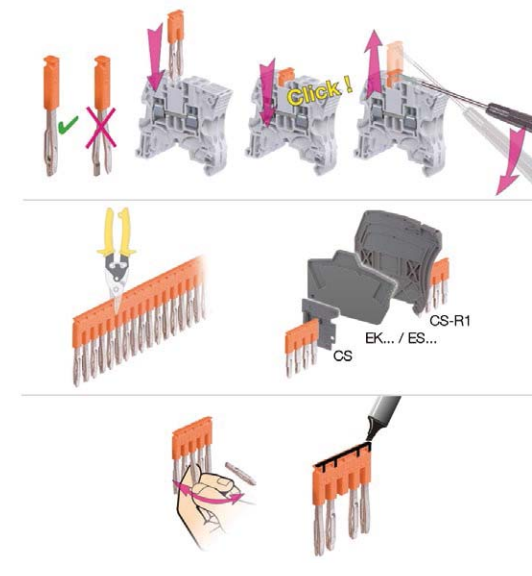

Additional accessories must be installed on the cut side of the jumper bar with cut extremities:

	Feed-through	Double-deck	Others
ZS	CS	ES...	CS-R1
ZK		EK...	

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Cross spacing jumpers

Common terminal block accessories



JB85-3
8 mm 0.315 in spacing

JB85-3 cross spacing jumpers

Description

Allows power distribution between terminal blocks with different spacing.
Standard JB5-3, JB6-3 and JB8-3 jumpers bar can be used as well as cross spacing jumpers (see selection table on mounting instructions below).

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Cross spacing jumpers 3 poles	Orange	JB85-3	1SNK900603R0000	10	2.80

Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
Ambient temperature min/max	NF F 16 101	I2F3		
	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
		IEC	UL - CSA	Ex e
Rated current		76 A	67 A	
Rated voltage	Standard use	1000 V	600 V	Please consult our dedicated certificates
	Cut extremities	800 V	300 V	
	Cut poles	630 V	300 V	
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

All the main technical data provided are "manufacturer" values.

RoHS
RoHS


Mounting Instructions

Cross spacing jumper selection between A and B terminal blocks with different spacing.

	B: 5.2 mm	6 mm	8 mm
A			
6 mm	JB5.3	-	-
8 mm	JB85.3	JB85.3	-
10 mm	JB85.3	JB85.3	JB8.3
12 mm	JB85.3	JB6.3	-

Yellow cell: for ZS and ZK terminal blocks

Blue cell: for ZS terminal blocks only

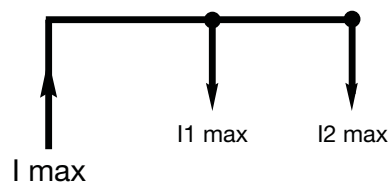

$$I1 \text{ max} + I2 \text{ max} \leq I \text{ max}$$

$$I \text{ max} \leq I \text{ rated Terminal Block}$$

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Test adapters

Common terminal block accessories



TP

7.6 mm 0.299 in spacing

Mounting instructions



5

TP2 test adapters

Description

- Insulated test adapter that enables individual voltage control,
- Direct plug-in solution into the jumpers channels,
- Compatible with standard isolated or non isolated test plugs DIA 2 mm 0.079 in and 2.3 mm 0.090 in,
- Withstand more than 10000 operations according to ABB test standards.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
For test plugs DIA 2 mm 0.079 in	Dark grey ■	TP2	1SNK900203R0000	20	1.73

Main technical data


Material specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F2		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
		IEC	UL - CSA	Ex e
Rated current		10 A		
Rated voltage	Standard use	1000 V	600 V	Not authorized
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	
All the main technical data provided are "manufacturer" values.				
	RoHS			
	RoHS			



TP4

7.6 mm 0.299 in spacing

Mounting instructions



TP4 test adapters

Description

- Isolated test adapter that enables individual voltage control,
- Direct plug-in solution into the jumpers channels,
- Compatible with standard isolated or non isolated test plugs DIA 4 mm 0.160 in,
- Withstand more than 10000 operations according to ABB test standards.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
For test plugs DIA 4 mm 0.160 in	Dark grey ■	TP4	1SNK900205R0000	20	2.41

Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F2		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
		IEC	UL - CSA	Ex e
Rated current		16 A		
Rated voltage	Standard use	1000 V	600 V	Not authorized
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	
All the main technical data provided are "manufacturer" values.				
	RoHS			
	RoHS			




All the technical data for UL/CSA standard and dimensions in inches are in italic.

TC5 test connectors

Common terminal block accessories



5.2 mm 0.205 in spacing



PT-3

Description

Ease the testing of terminal block assemblies:

- Make your own test connector assembly with our modular solution mixing various spacings,
- Direct plug-in solution into the jumpers channels,
- Withstand more than 10000 operations according to ABB test standards.

Main technical data

Connecting capacity		IEC	UL - CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded	0.2 ... 1.5 mm ²		Rail	
	Flexible with non insulated ferrule	0.22 ... 1.5 mm ²			
	Flexible with insulated ferrule	0.22 ... 1.5 mm ²		Wire stripping length	8 mm 0.315 in
Gauge	A1-B1				
2 conductors per clamp	Rigid - Solid / Stranded	0.2 ... 0.75 mm ²		Tool	
	Flexible with twin ferrule	0.22 ... 0.75 mm ²			
	Gauge	16 A / 1.5 mm ²		Torque	0.5 N.m ± 0.1 3.43 lb.in ± 0.885
Rated current / Rated cross section	16 A / 1.5 mm ²				
Rated short-time withstand current (1s)		180 A			
Rated voltage		1000 V			
Impulse withstand voltage		8000 V			
Protection		IP20	NEMA 1		

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards. All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.ABB.com>

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature	Service	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	-23 ... +104 °F

All the main technical data provided are "manufacturer" values.

RoHS	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS

Ordering details

Test connectors for 5.2 mm 0.205 in spacing terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Test connectors 5.2 mm 0.205 in spacing	Dark grey	TC5	1SNK900200R0000	10	5.23
End module, 5.2 mm 0.205 in		TC5-R1	1SNK900201R0000	10	5.23

Ordering details

Test connectors for 6 mm 0.236 in spacing terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Test connectors 5.2 mm 0.205 in spacing	Dark grey	TC5-R1	1SNK900201R0000	10	5.23
Spacers 0.8 mm 0.031 in spacing		ES-TC6	1SNK900105R0000	10	0.80

Ordering details

Test connectors for 8 mm 0.315 in spacing terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Test connectors 5.2 mm 0.205 in spacing	Dark grey	TC5	1SNK900200R0000	10	5.23
End module, 5.2 mm 0.205 in		TC5-R1	1SNK900201R0000	10	5.23
Spacers 2.8 mm 0.110 in spacing		ES-TC8	1SNK900104R0000	10	1.35


Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Cable clamps	Dark grey	PT-3	1SNK900625R0000	20	1.00
Blank card	White	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
Universal wire markers holder	Grey	UMH	1SNK900611R0000	10	0.20

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.
Technical data valid for copper conductors only.

PG5-R2 component plugs


Common terminal block accessories



PG5-R2

9.95 mm 0.392 in spacing

Mounting instructions



Open the PG5-R2 with a flat screwdriver
DIA . 3.5 mm 0.138 in;

Use a soldering iron to fix your component;

Close the PG5-R2;

Plug-in in the terminal blocks jumper
channels.

1 - Component installed in parallel with
two circuits

Description

- Component holder compatible with 5.2 mm 0.205 in spacing ZS4 feed-through terminal blocks,
- Fit components 16 x 16 x 8.5 mm 0.630 x 0.630 x 0.335 in (not supplied with plug) such as resistors, diodes, varistors,
- Direct plug-in into the terminal blocks jumper channels,
- Maximum dissipated power: 2 W.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Components insertion between 2 blocks	Dark grey <input checked="" type="checkbox"/>	PG5-R2	1SNK900403R0000	20	8.01

Main technical data

Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	-23 ... +104 °F		
		IEC	UL - CSA		
Rated current					
Rated voltage		250 V			
Impulse withstand voltage		4000 V			
Protection		IP20	NEMA 1		
All the main technical data provided are "manufacturer" values.					
	RoHS				
	RoHS				


Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Blank card	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		MC512PA	1SNK149999R0000	20	10.00
Universal wire markers holder	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Component plugs

Common terminal block accessories



PG5

5.2 mm 0.205 in spacing

Mounting instructions



Direct plug-in in disconnect with plug terminal block

1 - Component installed in series with circuit

PG5 component plugs

Description

- Ease the components installation (components not supplied with plug) with our quick plug-in mounting system which avoids soldering process,
- Accept 8.8 x 3.2 mm 0.346 x 0.125 in components such as resistors, diodes or subminiature fuses (fully encapsulated),
- Maximum dissipative power: 1 W.

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Components in series with circuit	Dark grey <input checked="" type="checkbox"/>	PG5	1SNK900401R0000	20	3.45

Main technical data

Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	-23 ... +104 °F		
		IEC	UL - CSA		
Rated current					
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		
All the main technical data provided are "manufacturer" values.					
	RoHS				
	RoHS				

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Blank card	In polycarbonate	White <input type="checkbox"/>	MC512	22	9.00
	In polyamide		MC512PA	20	10.00
Universal wire markers holder 5.2 mm 0.205 in spacing	Grey <input checked="" type="checkbox"/>	UMH	1SNK900611R0000	10	0.20



PG5-R1

5.2 mm 0.205 in spacing

Mounting instructions



PG5-R1 totally inserted: closed circuit;
PG5-R1 inserted in central position: open circuit, plug secured in isolated central position

PG5-R1 disconnect plugs

Description

Allow disconnect function when associated with the disconnect with plug terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Equipped with linking bar	Orange <input checked="" type="checkbox"/>	PG5-R1	1SNK900402R0000	20	3.45

Main technical data

Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F3			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	-23 ... +104 °F		
		IEC	UL - CSA		
Rated current		18 A	20 A		
Rated voltage		400 V	150 V		
Impulse withstand voltage		6000 V			
Protection		IP20	NEMA 1		
All the main technical data provided are "manufacturer" values.					
	RoHS				
	RoHS				

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Blank card	In polycarbonate	White <input type="checkbox"/>	MC512	22	9.00
	In polyamide		MC512PA	20	10.00
Universal wire markers holder 5.2 mm 0.205 in spacing	Grey <input checked="" type="checkbox"/>	UMH	1SNK900611R0000	10	0.20

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

TO screwdrivers

PS crimping tools

Common terminal block accessories



1SNK160242R0014

TO

Description

Flat head screwdriver.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
screwdriver 3.5 x 50 mm 0.138 x 1.97 <i>in</i>		TO3.5-50	1SNK900640R0000	12	21.60
screwdriver 4 x 100 mm 0.157 x 3.94 <i>in</i>		TO4-100	1SNK900641R0000	12	42.00
screwdriver 5.5 x 125 mm 0.216 x 4.92 <i>in</i>		TO5.5-125	1SNK900642R0000	12	75.50
screwdriver 6.5 x 150 mm 0.256 x 5.90 <i>in</i>		TO6.5-150	1SNK900643R0000	12	121.00
Insulated screwdriver 3.5 x 100 mm 0.138 x 3.94 <i>in</i>		TO3.5-100-INS	1SNK900644R0000	12	37.00

5



1SNK160123R0014

PS-3

Description

- Crimp flexible conductors equipped with ferrules from 0.08 to 10 mm² 28 AWG to 7 AWG,
- Semi-automatic crimping tool.


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
180 mm 7.09 <i>in</i> length		PS-3	1SNK900650R0000	1	380.00

All the technical data for UL/CSA standard and dimensions in inches are in *italic*.

End sections

PI-Spring terminal block accessories



1SNK160233V0014

EK2.5


EK2.5 end sections

Description

- Unique dark grey color that fits all terminal blocks colours and ease the identification of circuits within your terminal block assemblies,
- Compatible with ZK2.5, ZK2.5-PE, ZK4, ZK4-PE, ZK6 and ZK6-PE PI-Spring terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2 mm 0.079 in spacing	Dark grey	EK2.5	1SNK705910R0000	20	1.80



1SNK160234V0014

EK2.5-3P


EK2.5-3P end sections

Description

- Unique dark grey color that fits all terminal blocks colours and ease the identification of circuits within your terminal block assemblies,
- Compatible with ZK2.5-3P, ZK2.5-PE-3P, ZK4-3P, ZK4-PE-3P, ZK2.5-S..., ZK2.5-SP and ZK2.5-SF... PI-Spring terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2 mm 0.079 in spacing	Dark grey	EK2.5-3P	1SNK705911R0000	20	2.40



1SNK160235V0014

EK2.5-4P

EK2.5-4P end sections

Description

- Unique dark grey color that fits all terminal blocks colours and ease the identification of circuits within your terminal block assemblies,
- Compatible with ZK2.5-4P, ZK2.5-PE-4P, ZK4-4P and ZK4-PE-4P PI-Spring terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2 mm 0.079 in spacing	Dark grey	EK2.5-4P	1SNK705912R0000	20	2.70

Main technical data


Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	23 ... +104 °F		

All the main technical data provided are "manufacturer" values.

	RoHS				
	RoHS				

All the technical data for UL/CSA standard and dimensions in inches are in italic.

End sections PI-Spring terminal block accessories



1SNK160237F0014

EK2.5-D2 end sections

Description


– Compatible with ZK2.5-D2, ZK2.5-D2-PE, ZK2.5-D1 and ZK2.5-D1-PE PI-Spring terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2 mm 0.079 in spacing	Dark grey 	EK2.5-D2	1SNK705960R0000	20	3.40

EK2.5-D2

5



1SNK160238F0014

EK6 end sections


Description

– Compatible with ZK6-3P and ZK6-PE-3P PI-Spring terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2 mm 0.079 in spacing	Dark grey 	EK6-3P	1SNK708911R0000	20	2.80

EK6



1SNK160238F0014

EK10 end sections

Description

– Compatible with ZK10, ZK10-PE, ZK16 and ZK16-PE PI-Spring terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2 mm 0.079 in spacing	Dark grey 	EK10	1SNK710910R0000	20	3.30

EK10

Main technical data

Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 +110 °C	-67 +230 °F		
	Storage	-55 +110 °C	-67 +230 °F		
	Installing	-5 +40 °C	-23 +104 °F		

All the main technical data provided are "manufacturer" values.

RoHS																			
RoHS																			

All the technical data for UL/CSA standard and dimensions in inches are in italic.


Circuit separators

PI-Spring terminal block accessories



1SNK160240V0014

CS-R2



3 mm 0.118 in spacing

CS-R2 circuit separators

Description

- Ease the visual identification of the several circuits within your terminal block assemblies,
- Compatible with PI-spring feed-through and ground terminal blocks up to 8 mm spacing,
- Mounting on DIN3-TH35 rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
3 mm 0.118 in spacing	Dark grey	CS-R2	1SNK900106R0000	20	3.80

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	23 ... +104 °F

All the main technical data provided are "manufacturer" values.


RoHS
RoHS

5



1SNK160241V0014

CS-R3



3 mm 0.118 in spacing

CS-R3 circuit separators

Description

- Ease the visual identification of the several circuits within your terminal block assemblies,
- Compatible with all simple deck PI-spring terminal blocks,
- Mounting on DIN3-TH35 rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
3 mm 0.118 in spacing	Dark grey	CS-R3	1SNK900107R0000	20	6.40

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	23 ... +104 °F

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

All the technical data for UL/CSA standard and dimensions in inches are in italic.


Shield connectors

PI-Spring terminal block accessories



1SNK160067R0014

SHBP/SHB



SHBP/SHB shield connectors for PI-Spring terminal blocks

Description

- Ensure the continuity of your shield connection,
- Various connection solutions available: RILS cable ties, soldering, quick-connect.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Compatible with ZK2.5 and ZK2.5-S terminal blocks		SHBP	1SNK900601R0000	20	4.10
Compatible with ZK double deck terminal blocks		SHB	1SNK900602R0000	20	4.90

Main technical data

Material specifications	Insulating material				
	Flammability				
	NF F 16 101				
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	-23 ... +104 °F		
SHBP	IEC	UL - CSA	Ex e		
Rated voltage	100 V		50 V		
All the main technical data provided are "manufacturer" values.					
	RoHS				
	RoHS				

Accessories for screw clamp and PI-Spring terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Cable ties	For SNK shield connector	RILS	1SNK900627R0000	10	0.30

Mounting instructions



- SHBS is directly fixed on the terminal block,
 - SHB is fixed on the ES4-D2 end section,
 - SHBP is directly fixed on the terminal block,
- Connect the cable shielding on the shielding connector with:
- RILS cable ties,
 - quick-connect (the shield connector needs to be prepared),
 - soldering iron.

All the technical data for UL/CSA standard and dimensions in inches are in italic.

End sections

Screw clamp terminal block accessories



1SNK161019F0014

ES4

ES4 end sections

Description

- Unique dark grey color that fits all terminal blocks colours and ease the identification of circuits within your terminal block assemblies,
- Compatible with feed-through, ground and disconnect screw clamp terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2.2 mm 0.087 in spacing	Dark grey	ES4	1SNK505910R0000	20	2.20



1SNK160229V0014

ES6-3S

ES6-3S end sections

Description

Compatible with ZS6-3S and ZS6-3S-PE terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2.2 mm 0.087 in spacing	Dark grey	ES6-3S	1SNK505912R0000	20	2.50



1SNK160230V0014

ES6-4S

ES6-4S end sections

Description

Compatible with ZS6-4S, ZS6-4S-PE, ZS6-S-4S-T2 and ZS4-PE-R2 terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2.2 mm 0.087 in spacing	Dark grey	ES6-4S	1SNK505911R0000	20	3.10



1SNK161012F0014

ES4-D2

ES4-D2 end sections

Description

- Unique dark grey color that fits all terminal blocks colours and ease the identification of circuits within your terminal block assemblies,
- Compatible with double deck screw clamp terminal blocks

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2.55 mm 0.100 in spacing	Dark grey	ES4-D2	1SNK505960R0000	20	4.10

Main technical data

Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	23 ... +104 °F		


All the main technical data provided are "manufacturer" values.

	RoHS				
	RoHS				

All the technical data for UL/CSA standard and dimensions in inches are in italic.

End sections

Screw clamp terminal block accessories



1SNK160225V0014

ES4-T3

ES4-T3 end sections

Description

Compatible with ZS4-T3 terminal block.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
0.8 mm 0.031 in spacing	Dark grey	ES4-T3	1SNK505961R0000	20	4.20



1SNK161026R0014

ES4-SF


ES4-SF end sections

Description

Compatible with fuse ZS4-SF1... and disconnect screw clamp terminal blocks ZS4-S-R3.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1.5 mm 0.059 in spacing	Dark grey	ES4-SF	1SNK508960R0000	20	1.80



1SNK160231F0014

ES4-D2-SF1

ES4-D2-SF1 end sections

Description

Compatible with ZS4-D2-SF1... terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2.5 mm 0.098 in spacing	Dark grey	ES4-D2-SF1	1SNK508911R0000	20	5.00



1SNK161072F0014

ES10-ST

ES10-ST end sections

Description

- Unique dark grey color that fits all test disconnect terminal blocks ZS10-ST... and ease the identification of circuits within your terminal block assemblies,
- Also compatible with ZS10-R1 and ZS10-PE-R1.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2 mm 0.079 in spacing	Dark grey	ES10-ST	1SNK508910R0000	20	3.50

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Circuit separators 0 mm 0 in spacing	Dark grey	CS	1SNK900101R0000	20	0.20

Main technical data

Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 +110 °C	-67 +230 °F		
	Storage	-55 +110 °C	-67 +230 °F		
	Installing	-5 +40 °C	-23 +104 °F		

All the main technical data provided are "manufacturer" values.

	RoHS		Gost R		
--	------	--	--------	--	--

All the technical data for UL/CSA standard and dimensions in inches are in italic.

1SNK16006250201

JB8 screw jumper bars


Screw clamp terminal block accessories



JB8

8 mm 0.315 in spacing

Mounting instructions

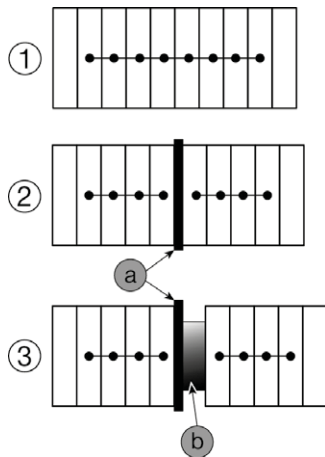

- 1 - Rated voltage: 160 V (IEC) /
Not authorized (UL)
 - 2 - Rated voltage: 320 V (IEC) /
Not authorized (UL)
 - 3 - Rated voltage: 1000 V (IEC) / 300 V (UL)
- a - End section ES10-ST
b - End stop BAZ1

JB8 jumper bars

Description

Insulated jumper bar with screw mounting.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
8 mm 0.315 in spacing	Orange	JB8-2-R1	1SNK908902R0000	10	7.6
		JB8-3-R1	1SNK908903R0000	10	11.6
		JB8-4-R1	1SNK908904R0000	10	15.5
		JB8-5-R1	1SNK908905R0000	10	19.4
		JB8-10-R1	1SNK908910R0000	10	39

Main technical data

Material specifications	Insulating material	Polyamide		Rail	
	Flammability	V0		Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in
	NF F 16 101	I2F3		Torque	0.7 N.m ± 0.1 6.2 lb.in ± 0.88
	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
Ambient temperature min/max	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	23 ... +104 °F		
Rated current		IEC 50 A	UL - CSA 51 A	Ex e	
Rated voltage	Standard use	160 V			
	Alternated poles			Not authorized	
Impulse withstand voltage					
Protection		IP20	NEMA 1		
All the main technical data provided are "manufacturer" values.					
	RoHS				

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Screw jumper bars

Screw clamp terminal block accessories



JB16

16 mm 0.630 in spacing

Mounting instructions



With flat pliers, cut out the partitions on the terminal block insulating body. Be careful to not cut out the jumpered terminal blocks partitions at both ends of the assembly in order to maintain the IP20, Nema1 protection and insulation,

Install the jumper bar with the recommended tool and torque.

JB16 jumper bars

Description

Insulated jumper bar with screw mounting.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
16 mm 0.630 in spacing	Orange	JB16-2	1SNK916302R0000	10	10.20
2 poles		JB16-3	1SNK916303R0000	10	16.00
3 poles		JB16-4	1SNK916304R0000	10	21.80
4 poles		JB16-5	1SNK916305R0000	10	27.60
5 poles		JB16-10	1SNK916310R0000	10	56.60
10 poles					

Main Technical Data

Material Specifications	Insulating material	Flammability	NF F 16 101	Service IEC 60068-2-1	Ambient temperature min/max	Storage	Installing	Rail	Tool	Torque
	Polyamide	V0	I2F3	-55 ... +110 °C	-67 ... +230 °F	-55 ... +110 °C	-67 ... +230 °F		Flat screwdriver	1.2 N.m ± 0.1
				-5 ... +40 °C	-23 ... +104 °F				Ø 5.5 mm	10.6 lb.in ± 0.885
									Ø 0.217 in	

Mounting instructions

Rated current	Rated voltage	IEC	UL - CSA	Ex e
125 A	Standard use	1000 V	600 V	630 V
	Alternated poles			Not authorized
		8000 V		
		IP20	NEMA 1	

All the main technical data provided are "manufacturer" values.



JB22

22 mm 0.866 in spacing

Mounting instructions



With flat pliers, cut out the partitions on the terminal block insulating body. Be careful to not cut out the jumpered terminal blocks partitions at both ends of the assembly in order to maintain the IP20, Nema1 protection and insulation,

Install the jumper bar with the recommended tool and torque.

JB22 jumper bars

Description

Screw jumper bars.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
22 mm 0.866 in spacing		JB22-2	1SNK922302R0000	5	27.00
2 poles		JB22-3	1SNK922303R0000	5	43.30
3 poles		JB22-5	1SNK922305R0000	5	76.10
5 poles		JB22-10	1SNK922310R0000	5	157.40
10 poles					

Main Technical Data

Material Specifications	Insulating material	Flammability	NF F 16 101	Service IEC 60068-2-1	Ambient temperature min/max	Storage	Installing	Rail	Tool	Torque
				-55 ... +110 °C	-67 ... +230 °F	-55 ... +110 °C	-67 ... +230 °F		Allen key	2 N.m ± 0.4
				-5 ... +40 °C	-23 ... +104 °F				Ø 4 mm	17.7 lb.in ± 3.54
									Ø 0.157 in	

Mounting instructions

Rated current	Rated voltage	IEC	UL - CSA	Ex e
192 A	Standard use	1000 V	175 A 600 V	630 V
	Alternated poles			Not authorized
		8000 V		
			NEMA 1	

All the main technical data provided are "manufacturer" values.

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Screw jumper bars


Screw clamp terminal block accessories



JB26

26 mm 1.024 in spacing

Mounting instructions



- With flat pliers, cut out the partitions on the terminal block insulating body. Be careful not to cut out the jumpered terminal blocks partitions at both ends of the assembly in order to maintain the IP20, Nema1 protection and insulation,
- Install the jumper bar with the recommended tool and torque.

JB26 jumper bars

Description

Screw jumper bars.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
26 mm 1.02 in spacing		JB26-2	1SNK926302R0000	5	41.20
		JB26-3	1SNK926303R0000	5	65.70
		JB26-5	1SNK926305R0000	5	115.70
		JB26-10	1SNK926310R0000	5	241.50

Main Technical Data

Material Specifications	Insulating material		Flammability		NF F 16 101	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F			
	Storage	-55 ... +110 °C	-67 ... +230 °F			
	Installing	-5 ... +40 °C	-23 ... +104 °F			

Mounting instructions

Rail			
Tool		Allen key	Ø 4 mm
			Ø 0.157 in
Torque		2 N.m ± 0.4	17.7 lb.in ± 3.54

	IEC	UL - CSA	Ex e
Rated current	232 A	230 A	
Rated voltage	Standard use	1000 V	600 V
	Alternated poles		
Impulse withstand voltage	8000 V		
Protection		NEMA 1	

All the main technical data provided are "manufacturer" values.

RoHS																			
RoHS																			

All the technical data for UL/CSA standard and dimensions in inches are in italic.

PC8 lateral jumper bars

Screw clamp terminal block accessories




1SNK160112F0014

PC8

8 mm 0.315 in spacing

Mounting instructions for ZS10-ST...

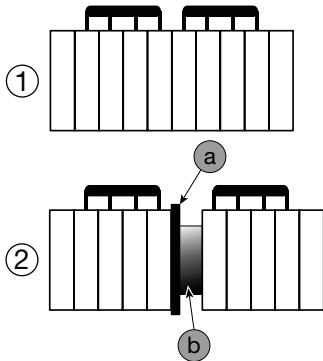

1 - Rated voltage: 630 V (IEC) / 150 V (UL)

2 - Rated voltage: 630 V (IEC) / 300 V (UL)

a - End section ES10-ST

b - End stop BAZ1

Description

IP20 comb jumper bars:

- Direct insertion in the screw clamp before tightening the screws, above the eventual conductor,
- Available in pre-cut poles for test disconnect terminal blocks applications.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
PC8 lateral jumper bars					
8 mm 0.315 in spacing	Black ■	2 poles	PC8-2	1SNA116538R1700	3.00
		3 poles	PC8-3	1SNA116539R1000	4.00
		4 poles	PC8-4	1SNA116540R2500	6.00
		10 poles	PC8-10	1SNA163313R2400	14.00
PC8 lateral jumper bars pre-cut poles					
8 mm 0.315 in spacing	Black ■	4/6 poles	PC8-R1	1SNA400711R0600	6.60
		4/8 poles	PC8-R2	1SNA400712R0700	7.84
		4/10 poles	PC8-R3	1SNA400713R0000	9.00
		3/4 poles	PC8-R4	1SNA400724R0300	4.50
		4/7 poles	PC8-R5	1SNA400842R0000	6.72
		2/3 poles	PC8-R6	1SNA400843R0000	3.1

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F3	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	-23 ... +104 °F

All the main technical data provided are "manufacturer" values.

RoHS																			
RoHS																			

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Circuit separators

Screw clamp terminal block accessories



CS
0 mm *O* in spacing

Mounting instructions



CS circuit separators

Description

- The CS circuit separator avoids the derating of terminal blocks when cut jumper bars JB are used,
- Compatible with feed-through terminal blocks up to 16 mm² 4 AWG,
- Without spacing loss.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
0 mm <i>O</i> in spacing	Dark grey <input checked="" type="checkbox"/>	CS	1SNK900101R0000	20	0.20

Main technical data


Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	-23 ... +104 °F		

All the main technical data provided are "manufacturer" values.

RoHS	RoHS				
------	------	--	--	--	--



CS-R1



3 mm *O.118* in spacing

Mounting instructions



CS-R1 circuit separators

Description

- Ease the visual identification of the several circuits within your terminal block assemblies,
- Compatible with feed-through terminal blocks up to 35 mm² 0 AWG,
- Intermediate cover holder for CO protective cover,
- Mounting on DIN3-TH35 rail.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
3 mm <i>O.118</i> in spacing	Dark grey <input checked="" type="checkbox"/>	CS-R1	1SNK900103R0000	20	5.20

Main technical data

Material specifications	Insulating material	Polyamide			
	Flammability	V0			
	NF F 16 101	I2F2			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F		
	Storage	-55 ... +110 °C	-67 ... +230 °F		
	Installing	-5 ... +40 °C	-23 ... +104 °F		

All the main technical data provided are "manufacturer" values.

RoHS	RoHS				
------	------	--	--	--	--

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Blank card	In polycarbonate	White <input type="checkbox"/>	MC512	22	9.00
	In polyamide		MC512PA	20	10.00
Universal wire markers holder	5.2 mm <i>0.205</i> in spacing	Grey <input type="checkbox"/>	UMH	10	0.20

All the technical data for UL/CSA standard and dimensions in inches are in italic.

Shield connectors

Screw clamp terminal block accessories



1SNK160149F0014

SHBS/SHB

SHBS/SHB shield connectors

Description


- Ensure the continuity of your shield connection,
- Various connection solutions available: RILS cable ties, soldering, quick-connect.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Compatible with ZS feed-through terminal blocks		SHBS	1SNK900600R0000	20	3.50
Compatible with ZS double deck terminal blocks		SHB	1SNK900602R0000	20	4.90

Main technical data

Material specifications	Insulating material			
	Flammability			
	NF F 16 101			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
SHBS	IEC	UL - CSA	Ex e	
Rated voltage	320 V		125 V	
All the main technical data provided are "manufacturer" values.				
	RoHS			
	RoHS			



5

Accessories for screw clamp and PI-Spring screwless terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Cable ties		RILS	1SNK900627R0000	10	0.30

Mounting instructions



- SHBS is directly fixed on the terminal block,
 - SHB is fixed on the ES4-D2 end section,
 - SHBP is directly fixed on the terminal block,
- Connect the cable shielding on the shielding connector with:
- RILS cable ties,
 - quick-connect (the shield connector needs to be prepared),
 - soldering iron.

All the technical data for UL/CSA standard and dimensions in inches are in italic.


Protecting covers

Screw clamp terminal block accessories



1SNK160110F0014

CO



CO protecting covers

Description

- Restrict access to your assembly with the protecting cover CO installed with KCO mounting kit (2 end stops, 2 sealing accessories),
- Compatible with SNK feed-through terminal blocks up to 35 mm² 0 AWG.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 m 39.4 in length	Transparent <input checked="" type="checkbox"/>	CO	1SNK900604R0000	1	300.00

Main technical data

Material specifications	Insulating material	PVC	
	Flammability	V0	
	NF F 16 101		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +80 °C	-67 ... +176 °F
	Storage	-55 ... +80 °C	-67 ... +176 °F
	Installing	-5 ... +40 °C	-23 ... +104 °F

All the main technical data provided are "manufacturer" values.

RoHS

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Protecting cover kits	Dark grey <input checked="" type="checkbox"/>	KCO	1SNK900624R0000	1	47.80
Label	White <input type="checkbox"/>	PAM43020	1SNA235106R2600	20	27.80

Mounting instructions



Restrict access to the circuit by sealing the cover:

- Drill on the CO center line at 5 mm 0.197 in from the extremity with 5 mm 0.197 in diameter drill,
- Pass the sealing collar through the CO and KCO holes.



1SNK160114F0014

KCO

KCO protecting cover kits

Description

Mount your protecting cover with the KCO versatile mounting kit (2 end stops, 2 sealing accessories):

- Maintain the cover,
- Reliably seal the access to the terminal assembly if needed,
- Use it as well as an end stop.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Mounting kit for cover CO	Dark grey <input checked="" type="checkbox"/>	KCO	1SNK900624R0000	1	47.80

Main technical data


Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	23 ... +104 °F

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Tool		Flat screwdriver Ø 4 mm
Torque		Ø 0.157 in

All the main technical data provided are "manufacturer" values.

RoHS



All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

Test sockets

Screw clamp terminal block accessories



1SNC16046ZF0014

AJS9

6.4 mm 0.252 in spacing

AJS9 test sockets

Description

- Insulated test sockets,
- Six colors available for circuit identification,
- Compatible with standard DIA 4 mm 0.157 in test plugs:
 - insulated (according to IEC 60101-031)
 - not insulated (with mobile protection).

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
For test plug DIA 4 mm 0.157 in	Yellow	AJS9	1SNA179726R0200	25	3.60
	Black	AJS9-BK	1SNA206680R1500	25	3.60
	Green	AJS9-GN	1SNA206681R0200	25	3.60
	Grey	AJS9-GR	1SNA206682R0300	25	3.60
	Blue	AJS9-BL	1SNA206683R0400	25	3.60
	Red	AJS9-RD	1SNA206720R1400	25	3.60
	White	AJS9-WH	1SNA206765R0000	25	3.60

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F3	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	23 ... +104 °F

Mounting instructions

Rail		
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in
Torque		0.4 - 0.6 N.m 3.5 - 5.3 lb.in

All the main technical data provided are "manufacturer" values.

RoHS									
RoHS									

All the technical data for UL/CSA standard and dimensions in inches are in italic.


End sections

Pluggable terminal block accessories



1SNK160301V0014

EDK2.5-22



EDK2.5-22 end sections

Description

– Compatible with ZDK2.5-22 and ZDK4-22 pluggable terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
2.2 mm 0.087 in spacing	Dark grey	EDK2.5-22	1SNK805910R0000	20	3.15

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °C
	Storage	-55 ... +110 °C	-67 ... +230 °C
	Installing	-5 ... +40 °C	-23 ... +104 °C


All the main technical data provided are "manufacturer" values.

RoHS
RoHS



1SNK160302V0014

EDS4-22



EDS4-22 end sections

Description

– Compatible with ZDS4-22 pluggable terminal block.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
0.8 mm 0.031 in spacing	Dark grey	EDS4-22	1SNK805911R0000	20	1.85

Main technical data

Material specifications	Insulating material	Polyamide	
	Flammability	V0	
	NF F 16 101	I2F2	
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °C
	Storage	-55 ... +110 °C	-67 ... +230 °C
	Installing	-5 ... +40 °C	-23 ... +104 °C

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.

Coding pegs - Locking devices

Pluggable terminal block accessories



1SNK160298V0014

COP

COP coding pegs

Description

– The coding pegs prevent plugs from being inserted into the wrong circuit.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
	Dark grey	COP-ZD	1SNK900636R0000	10	3.57


Main technical data

Material specifications	Insulating material	Polyamide	
Flammability	V0		
NF F 16 101	I2F2		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °C
Storage	-55 ... +110 °C	-67 ... +230 °C	
Installing	-5 ... +40 °C	-23 ... +104 °C	

All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Mounting instructions

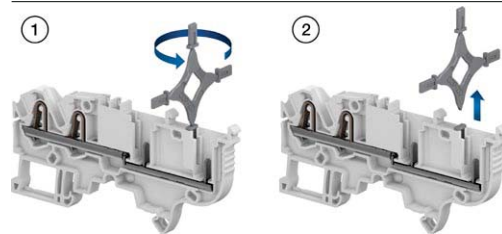

1SNK160315V0014

VR

9.4 mm 0.370 in spacing

VR locking devices

Description

- Automatic locking provides excellent plug protection in case of accidental pulling,
- Lock safely one or two CDK or CDS plugs on ZDK and ZDS pluggable terminal blocks,
- Install one VR... up to 8 poles plugs assembly and two VR... up to 15 poles assembly,
- Organize and secure the wires with the locking version VR-ZD-R1.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
9.4 mm 0.370 in spacing	Black	VR-ZD	1SNK900637R0000	50	6.5
		VR-ZD-R1	1SNK900638R0000	50	1.04


Main technical data

Material specifications	Insulating material	Polyacetal	
Flammability	HB		
NF F 16 101			
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °C
Storage	-55 ... +110 °C	-67 ... +230 °C	
Installing	-5 ... +40 °C	-23 ... +104 °C	


All the main technical data provided are "manufacturer" values.

RoHS
RoHS

Mounting instructions

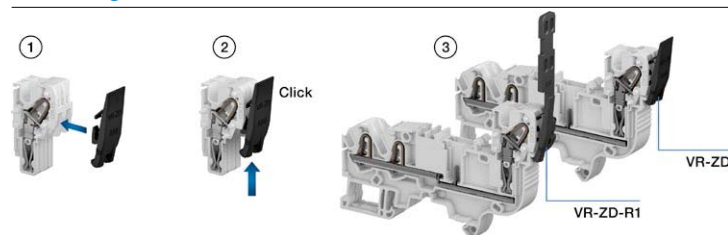


All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.

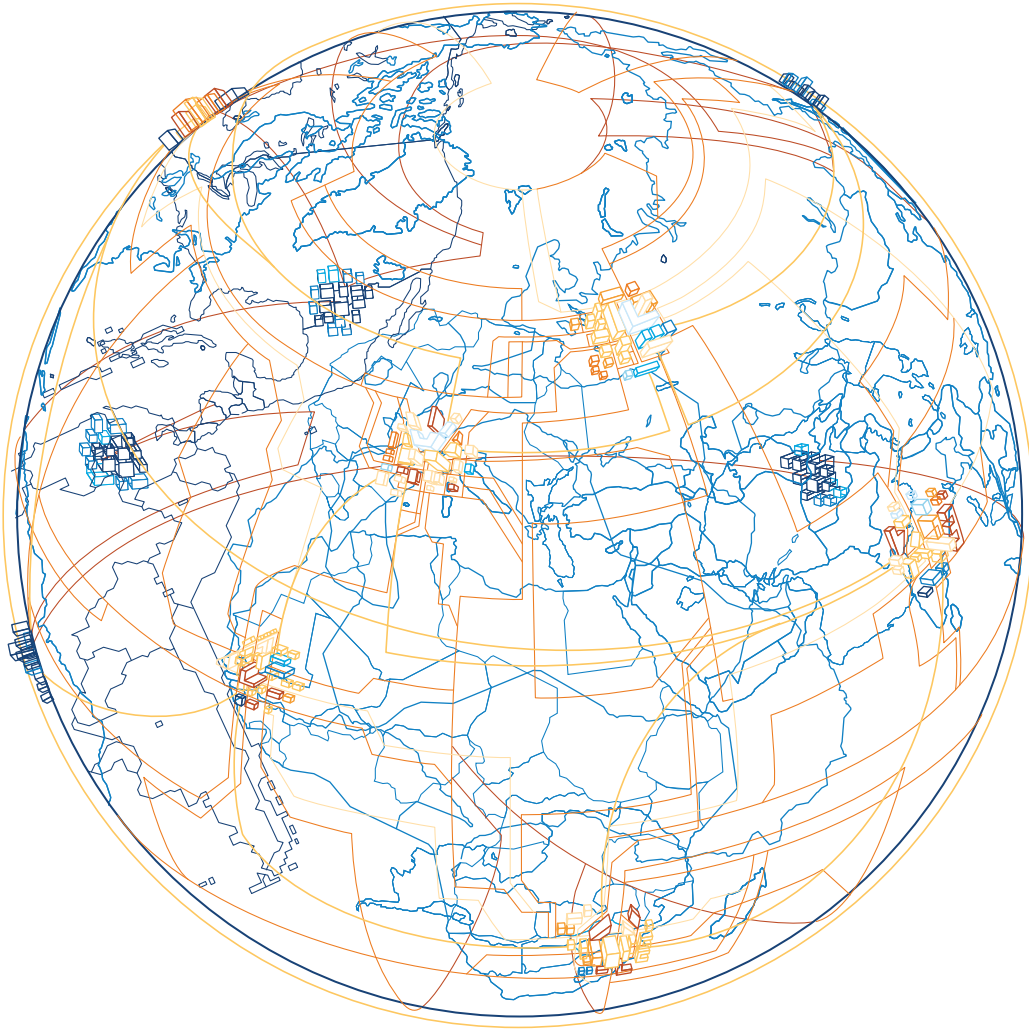



SNK series, marking solutions



Selection guide	188
HTP500 thermal transfer printer	190
MG3 thermal transfer printer	192
AMS 500 and AMS 250 plotter	194

Terminal block markers

5.2 mm 0.205 in spacing

MC512, MG-CPM-13	Blank card in polycarbonate	196
MC512PA	Blank card in polyamide	197
	Pre-printed marker card for horizontal terminal block assembly	198
	Pre-printed marker card for vertical terminal block assembly	200

6 mm 0.236 in spacing

MC612, MG-CPM-13	Blank card in polycarbonate	202
MC612PA	Blank card in polyamide	203
	Pre-printed marker card for horizontal terminal block assembly	204
	Pre-printed marker card for vertical terminal block assembly	206

8 mm 0.315 in spacing

MC812, MC812PA	Blank card	208
MC812PA	Pre-printed marker card for horizontal terminal block assembly	209
	Pre-printed marker card for vertical terminal block assembly	211

Markers

UMH	Universal wire markers holder	213
MG2-TDMO	Clip-on blank wire marker	213
MCLH	Label	214

Marking systems

HTP500	Thermal transfer printer	215
MG3	Thermal transfer printer	216
AMS	Plotter	217

Marking systems

Selection guide

For high volume
terminal blocks applications



6	Marking systems	HTP500-V2
	Technology	Thermal transfer
	Printing mode	Manual / Auto (up to 64 cards)
	Printing speed	High
	Printing quality	300 x 600 dpi
	1 ribbon or ink cartridge printing capacity	~ 60 000, RC510 markers (5 x 10 mm markers)
	Printing color available (monochrome)	Black / Red
	Terminal block markers material	Polycarbonate
	Terminal block markers	
	SNK series terminal blocks blank markers polyamide	–
	SNK series terminal blocks blank markers polycarbonate	MC
	SNK series terminal blocks blank markers PVC	–
	End stop markers	2 marker types
	Other terminal blocks manufacturers blank markers	3 manufacturers
	Wires and cables markers	2 marker types
	Components and equipment markers	4 marker types

For versatile applications



For basic marking applications



MG3	AMS 500	AMS 250
Thermal transfer	Plotter	
Manual	Manual	
Medium	Low	
300 x 600 dpi	300 x 300 dpi	
~ 160 000, MG-CPM (5 x 10 mm markers)	~ 230 000 markers (with 3 characters per markers)	
Black / Red / Blue / Green / White	Black	
Polycarbonate	Polyamide	
–	MC...PA	
MG-CPM	–	
MG-CPMF	–	
2 marker types	4 marker types	
15 manufacturers	5 manufacturers	
4 marker types	1 marker type	
9 marker types	9 marker types	

HTP500 thermal transfer printer

The best solution to print high volume of terminal block markers



6

The fast and high resolution printing marking system

Time saving

The 64-card feeder enables a serial print run to be started without human intervention. The printing process is very fast, able to print up to 8500 markers per hour.

Immediate use

Thanks to the thermal transfer technology, there is no drying time. Once printed, you can directly install your markers on your electrical installation.

Clean printing every time

Before each print, the special cleaning ribbon automatically cleans the marking card thus ensuring the best print quality for your markers. You can also run automatic cleaning mode on the HTP500 from the digital screen.

Low maintenance

The printing and feeding areas are easy to access allowing the ribbon to be changed in only a few seconds. The ribbon cartridge keeps your hands clean while you are replacing it.



64 cards feeder



Easy ribbon replacement



Special cleaning cassette easy to remove



Digital screen interface

The smart options you need

HTP500 software


The software for the HTP500 is compatible with all Windows fonts and lets you import images and data in various formats (.csv, .glv, etc.) so you can fully customize your printouts.

Limited number of support plates

With only 3 support plates, the HTP500 simplifies your everyday printing tasks.

Comprehensive digital screen interface

Choose your language directly on the printer interface.

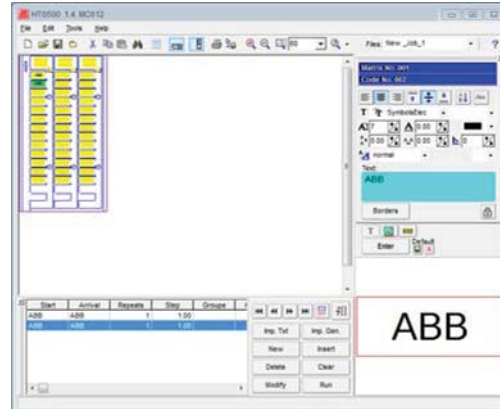

Technical features

- Resolution: 300 dpi
- Length: 418 mm
- Width: 235 mm
- Height: 210 mm
- Weight: 9.5 kg.

Computer configuration required

- Microsoft® Windows® XP, Windows Vista or Windows 7*
- USB connection
- CD player or Internet connection.

* Except Windows 7 64 bits.

MG3 thermal transfer printer

The versatile, compact and robust marking system

MARKINGenius® MG3 is a high resolution printer based on thermal transfer technology for producing high quality identification and labelling for terminal blocks, cables and all equipment mounted in electrical panels.

Compact, ergonomic, clean and quiet, MARKINGenius® MG3 may be conveniently located in an office or workshop or easily transported in the field.

Thermal transfer technology uses heat to transfer characters or symbols onto a plastic marker through an ink ribbon. Besides the excellent printing quality, there is no drying time and the markers are instantly usable. With the MG3 thermal transfer printer, forget about drying times and clogged print head problems.



6

Combined simplicity, performance and make savings

Facilitate your printing process

Compact design (382 x 230 x 230 mm) facilitates use in workshops or in the field.

Easy to install and use: comprehensive quick-start kit. Intuitive software with easy data import and entry.

Versatile: many different media available: plastic markers, stickers, labels etc.

Save time and consumables

Gain time with a short printing process:

12 seconds cycle. Carriage loading and unloading operation is fast and simple.


Economic: up to 300 000 markers with one ribbon. Partially printed marker card may be reused to avoid wastage.

No drying time: printed markers are immediately ready to use.

Experience quality

High Quality printing: 300 x 600 dpi for image or graphic printing.

Robust: all moving parts are in metal.



High quality printing



Short printing cycle of 12 seconds



Economic: up to 300 000 markers with one ribbon



Many media types available for printing


MG3 thermal transfer printer

Components of the kit

The MG3 printer is delivered with a comprehensive set of accessories for getting started quickly

Kit (Order code: 1SNB419001R0000) including:

- 1 Thermal transfer printer
- 1 Software CD
- 1 Power supply cable
- 1 USB cable
- 1 Installation, operating, maintenance and user documentation
- 1 Protective cover
- 1 Ribbon take up spool
- 1 MG2-QTB support plate for terminal block markers (MG-CPM-01, 02, 03, 04, 07)
- 1 MG2-PWC support plate for wire and cable markers (MG-TPM)
- 1 MG2-PLT support plate for wire and cable markers (MG-TPMF) and various labels and signs
- 1 MG2-ETB Support plate for SNK series terminal block markers (MG-CPM-13)
- 1 MG2-ETR Black printing ribbon.

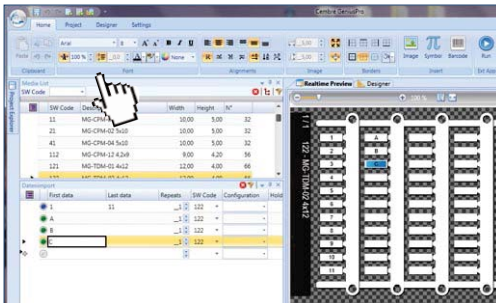

Genius Pro software

The Genius Pro software application benefits from long experience in the field and requires the operator to have only basic skills in order to use it. It is application-oriented and provides fast and easy data entry including a dynamic full-size media preview giving an accurate representation of the current job.

Features / characteristics:

- More than ten types of counter such as *.txt, *.cad, *.dbf, *.xls can be imported
- AutoCAD, Elcad, Spac and Excel import
- MATRIX, ACS and Simplo conversion

- Optimised printing of media for cables, terminal blocks, control gear, connectors, push buttons, components, panels and self-adhesive labels
- Specially developed proprietary Genius font and also Windows fonts
- Designs customised media
- Vector, drawing and clip art printing
- Free upgrades for each new release
- Microsoft® Windows® XP, Windows Vista®, Windows 2000 SP4®, Windows 7®.

AMS 500 and AMS 250 plotter

The universal standard for printing jobs



AMS 500

Universal printing plotter

Compatible with all original manufacturer terminal block markers (polyamide), it can also print other identification supports such as: wire and cable markers, push buttons, panels...

This plotter offers a large working area, hosting up to 4 different support plates for one plot job.

Error detection mode

The A3 panel automatically recognises the support plate and avoids the need to select marking elements, it also warns the user when the support is wrongly installed.

Dry out protection system

Pens are prevented from drying out thanks to AMS 500 integrated pen station.

AMS 250

Compact


This A4 plotter is smaller than AMS 500 and is more suited to a cluttered environment.




Automatic installation

The installation program starts automatically. The computer just needs to be rebooted after it has finished and printing can start.

What you see is what you get !

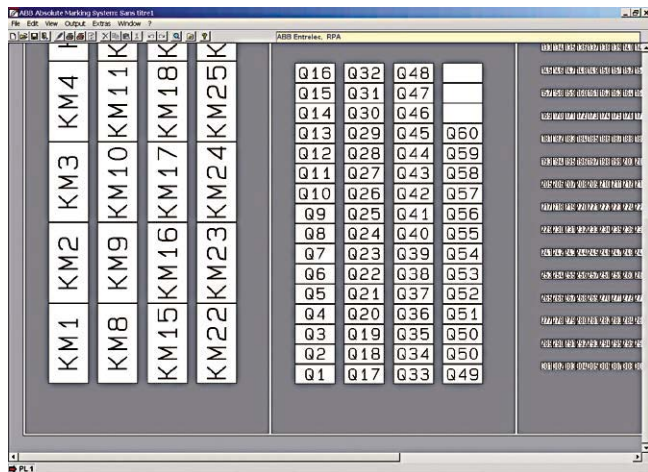

User friendly
Microsoft® Windows® software

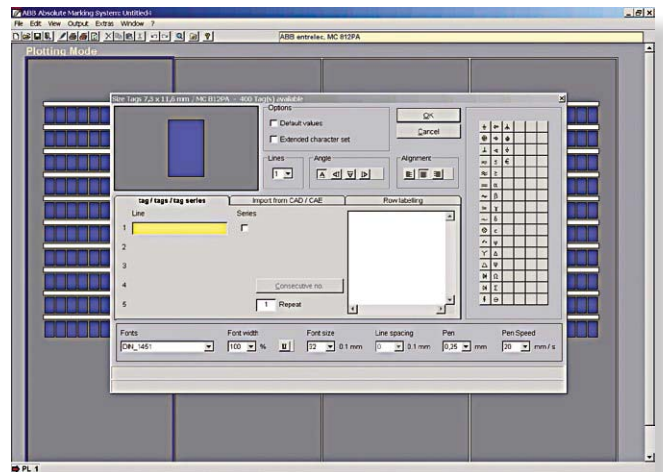

Time saving: data import function
from CAD, TXT and Excel® files



New special ink disposable plotter pens ED-R

- Disposable pens ED-R almost never clog, they are ideal for use in particularly dry environments.
- These pens are filled with the permanent ink ED, most suitable for marking various plastic surfaces.
- The ED ink should only be used on plastic material. Do not clean or touch with aggressive fluids.
- For applications outside of the control panel the ink P 2.0 is more suitable and durable.

Terminal block markers

Blank card in polycarbonate - 5.2 mm 0.205 in spacing



MC512



HTP500-V2 KIT

MC512 terminal block markers

Description

- MC512 marker card in polycarbonate for high marking quality, durability and speed when marked with the HTP500 printer,
- Excellent marking durability in the most severe environments,
- Improved marking visibility thanks to the increased marking surface +20% (12 mm 0.472 in).

Main technical data

Material	Flammability	Maximum printed digits				Dimensions	
		mm		inches			
Polycarbonate	V0	Horizontal	3	Vertical	8	4.8 x 12	0.189 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
Blank card	45	White <input type="checkbox"/>	MC512	1SNK140000R0000	22	9.00
		Yellow <input type="checkbox"/>	MC512-YL	1SNK140004R0000	22	9.00


Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Thermal transfer printer	HTP500-V2 KIT	1SNA235700R1500	1	16000.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Marking support plate for MC and RCTT marker cards (HTP500)	HTP500-PL2	1SNA235705R0600	1	291.00

6



MG-CPM-13



MG3 KIT

MG-CPM-13 terminal block markers

Description

- MG-CPM-13 41790 and 41740 markers are used for marking 5.2 mm 0.205 in spacing SNK terminal blocks,
- Provide an elevate mechanical robustness, high dimensional stability and are halogen free,
- Single application on terminal block,
- 35 cards per packing

Main technical data

Material	Flammability	Maximum printed digits				Dimensions	
		mm		inches			
Polycarbonate	V2	Horizontal	3	Vertical	8	4.8 x 12	0.196 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg marker	Weight (1 pce) g
Blank card	56	White <input type="checkbox"/>	MG-CPM-13 41790	1SNB041790R0512	1960	0.232
		Yellow <input type="checkbox"/>	MG-CPM 13 41740	1SNB041740R0512	1960	0.232

Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Thermal transfer printer	MG3 KIT	1SNB419001R0000	1	12600.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Support plate for MG-CPM-13	MG2-ETB 991016	1SNB991016R0000	1	100.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.

1SNK160003S0201 - Rev. A

Terminal block markers

Blank card in polyamide - 5.2 mm 0.205 in spacing



MC512PA



AMS 500

MC512PA terminal block markers

Description

- MC512PA marker card in polyamide to be marked on AMS 500 marking table for medium scale volumes and standard industrial applications,
- Terminal blocks are directly independent after strip mounting,
- Improved marking visibility thanks to the increased marking surface +20% (12 mm 0.472 in).

Main technical data

Material	Flammability	Maximum printed digits		Dimensions	
		Horizontal	Vertical	mm	inches
Polyamide	V2	3	8	4.8 x 12	0.189 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
Blank card	100	White <input type="checkbox"/>	MC512PA	1SNK149999R0000	20	10.00

Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
AMS plotter	KIT MAO AMS 500	1SNA360000R2400	1	12600.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Marking support plate for MC PA marker cards (3 MC PA marker cards per plate)	SPRC 30-3	1SNA360039R1700	1	300.00

MC512PA terminal block markers

Pre-printed marker card for horizontal terminal block assembly



MC512PA



5.2 mm 0.205 in spacing

Description

Save printing time with our large pre-printed cards offer with pre-printed numbers, letters or symbols.

Main technical data

Material	Flammability	Dimensions	
		mm	inches
Polyamide	V2	4.8 x 12	0.189 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
0->9 (x10)	100	White	MC512PA	1SNK140091R0000	1	10.00
1->10 (x10)	100	White	MC512PA	1SNK140011R0000	1	10.00
11->20 (x10)	100	White	MC512PA	1SNK140021R0000	1	10.00
21->30 (x10)	100	White	MC512PA	1SNK140031R0000	1	10.00
31->40 (x10)	100	White	MC512PA	1SNK140041R0000	1	10.00
41->50 (x10)	100	White	MC512PA	1SNK140051R0000	1	10.00
51->60 (x10)	100	White	MC512PA	1SNK140061R0000	1	10.00
61->70 (x10)	100	White	MC512PA	1SNK140071R0000	1	10.00
71->80 (x10)	100	White	MC512PA	1SNK140081R0000	1	10.00
81->90 (x10)	100	White	MC512PA	1SNK140083R0000	1	10.00
91->100 (x10)	100	White	MC512PA	1SNK140101R0000	1	10.00
101->110 (x10)	100	White	MC512PA	1SNK140111R0000	1	10.00
111->120 (x10)	100	White	MC512PA	1SNK140121R0000	1	10.00
121->130 (x10)	100	White	MC512PA	1SNK140131R0000	1	10.00
131->140 (x10)	100	White	MC512PA	1SNK140141R0000	1	10.00
141->150 (x10)	100	White	MC512PA	1SNK140151R0000	1	10.00
151->160 (x10)	100	White	MC512PA	1SNK140161R0000	1	10.00
161->170 (x10)	100	White	MC512PA	1SNK140171R0000	1	10.00
171->180 (x10)	100	White	MC512PA	1SNK140181R0000	1	10.00
181->190 (x10)	100	White	MC512PA	1SNK140191R0000	1	10.00
191->200 (x10)	100	White	MC512PA	1SNK140201R0000	1	10.00
1->100	100	White	MC512PA	1SNK145011R0000	1	10.00
101->200	100	White	MC512PA	1SNK145021R0000	1	10.00
201->300	100	White	MC512PA	1SNK145031R0000	1	10.00
301->400	100	White	MC512PA	1SNK145041R0000	1	10.00
401->500	100	White	MC512PA	1SNK145051R0000	1	10.00
501->600	100	White	MC512PA	1SNK145061R0000	1	10.00
601->700	100	White	MC512PA	1SNK145071R0000	1	10.00
701->800	100	White	MC512PA	1SNK145081R0000	1	10.00
801->900	100	White	MC512PA	1SNK145091R0000	1	10.00
A (x100)	100	White	MC512PA	1SNK146011R0000	1	10.00
B (x100)	100	White	MC512PA	1SNK146021R0000	1	10.00
C (x100)	100	White	MC512PA	1SNK146031R0000	1	10.00
D (x100)	100	White	MC512PA	1SNK146041R0000	1	10.00
E (x100)	100	White	MC512PA	1SNK146051R0000	1	10.00
F (x100)	100	White	MC512PA	1SNK146061R0000	1	10.00
G (x100)	100	White	MC512PA	1SNK146071R0000	1	10.00
H (x100)	100	White	MC512PA	1SNK146081R0000	1	10.00
I (x100)	100	White	MC512PA	1SNK146091R0000	1	10.00
J (x100)	100	White	MC512PA	1SNK146101R0000	1	10.00
K (x100)	100	White	MC512PA	1SNK146111R0000	1	10.00
L (x100)	100	White	MC512PA	1SNK146121R0000	1	10.00
M (x100)	100	White	MC512PA	1SNK146131R0000	1	10.00
N (x100)	100	White	MC512PA	1SNK146141R0000	1	10.00
O (x100)	100	White	MC512PA	1SNK146151R0000	1	10.00
P (x100)	100	White	MC512PA	1SNK146161R0000	1	10.00
Q (x100)	100	White	MC512PA	1SNK146171R0000	1	10.00
R (x100)	100	White	MC512PA	1SNK146181R0000	1	10.00
S (x100)	100	White	MC512PA	1SNK146191R0000	1	10.00
T (x100)	100	White	MC512PA	1SNK146201R0000	1	10.00
U (x100)	100	White	MC512PA	1SNK146211R0000	1	10.00
V (x100)	100	White	MC512PA	1SNK146221R0000	1	10.00
W (x100)	100	White	MC512PA	1SNK146231R0000	1	10.00
X (x100)	100	White	MC512PA	1SNK146241R0000	1	10.00
Y (x100)	100	White	MC512PA	1SNK146251R0000	1	10.00

Continue on next page →

All the technical data for UL/CSA standard and dimensions in inches are in italic.

1SNK16000450201 - Rev. A

MC512PA terminal block markers

Pre-printed marker card for horizontal terminal block assembly



MC512PA



5.2 mm 0.205 in spacing

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
← Continuation of previous page						
Z (x100)	100	White	MC512PA	1SNK146261R0000	1	10.00
0 (x100)	100	White	MC512PA	1SNK147001R0000	1	10.00
1 (x100)	100	White	MC512PA	1SNK147011R0000	1	10.00
2 (x100)	100	White	MC512PA	1SNK147021R0000	1	10.00
3 (x100)	100	White	MC512PA	1SNK147031R0000	1	10.00
4 (x100)	100	White	MC512PA	1SNK147041R0000	1	10.00
5 (x100)	100	White	MC512PA	1SNK147051R0000	1	10.00
6 (x100)	100	White	MC512PA	1SNK147061R0000	1	10.00
7 (x100)	100	White	MC512PA	1SNK147071R0000	1	10.00
8 (x100)	100	White	MC512PA	1SNK147081R0000	1	10.00
9 (x100)	100	White	MC512PA	1SNK147091R0000	1	10.00
+ (x100)	100	White	MC512PA	1SNK148001R0000	1	10.00
- (x100)	100	White	MC512PA	1SNK148011R0000	1	10.00
~ (x100)	100	White	MC512PA	1SNK148021R0000	1	10.00
= (x100)	100	White	MC512PA	1SNK148031R0000	1	10.00
$\frac{\pm}{\pm}$ (x100)	100	White	MC512PA	1SNK148041R0000	1	10.00
L1 (x100)	100	White	MC512PA	1SNK148051R0000	1	10.00
L2 (x100)	100	White	MC512PA	1SNK148061R0000	1	10.00
L3 (x100)	100	White	MC512PA	1SNK148071R0000	1	10.00
PE (x100)	100	White	MC512PA	1SNK148091R0000	1	10.00
U1 (x100)	100	White	MC512PA	1SNK148101R0000	1	10.00
U2 (x100)	100	White	MC512PA	1SNK148111R0000	1	10.00
U3 (x100)	100	White	MC512PA	1SNK148121R0000	1	10.00
V1 (x100)	100	White	MC512PA	1SNK148131R0000	1	10.00
V2 (x100)	100	White	MC512PA	1SNK148141R0000	1	10.00
V3 (x100)	100	White	MC512PA	1SNK148151R0000	1	10.00
W1 (x100)	100	White	MC512PA	1SNK148161R0000	1	10.00
W2 (x100)	100	White	MC512PA	1SNK148171R0000	1	10.00
W3 (x100)	100	White	MC512PA	1SNK148181R0000	1	10.00
L1-L2-L3-N-PE (x20)	100	White	MC512PA	1SNK149001R0000	1	10.00
U1-U2-U3-V1-V2-V3-W1-W2-W3 (x10) + U1 (x10)	100	White	MC512PA	1SNK149011R0000	1	10.00

MC512PA terminal block markers

Pre-printed marker card for vertical terminal block assembly



MC512PA



5.2 mm 0.205 in spacing

Description

Save printing time with our large pre-printed cards offer with pre-printed numbers, letters or symbols.

Main technical data

Material	Flammability	Dimensions	
		mm	inches
Polyamide	V2	4.8 x 12	0.189 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
0->9 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140092R0000	1	10.00
1->10 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140012R0000	1	10.00
11->20 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140022R0000	1	10.00
21->30 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140032R0000	1	10.00
31->40 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140042R0000	1	10.00
41->50 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140052R0000	1	10.00
51->60 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140062R0000	1	10.00
61->70 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140072R0000	1	10.00
71->80 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140082R0000	1	10.00
81->90 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140084R0000	1	10.00
91->100 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140102R0000	1	10.00
101->110 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140112R0000	1	10.00
111->120 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140122R0000	1	10.00
121->130 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140132R0000	1	10.00
131->140 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140142R0000	1	10.00
141->150 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140152R0000	1	10.00
151->160 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140162R0000	1	10.00
161->170 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140172R0000	1	10.00
171->180 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140182R0000	1	10.00
181->190 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140192R0000	1	10.00
191->200 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK140202R0000	1	10.00
1->100	100	White <input type="checkbox"/>	MC512PA	1SNK145012R0000	1	10.00
101->200	100	White <input type="checkbox"/>	MC512PA	1SNK145022R0000	1	10.00
201->300	100	White <input type="checkbox"/>	MC512PA	1SNK145032R0000	1	10.00
301->400	100	White <input type="checkbox"/>	MC512PA	1SNK145042R0000	1	10.00
401->500	100	White <input type="checkbox"/>	MC512PA	1SNK145052R0000	1	10.00
501->600	100	White <input type="checkbox"/>	MC512PA	1SNK145062R0000	1	10.00
601->700	100	White <input type="checkbox"/>	MC512PA	1SNK145072R0000	1	10.00
701->800	100	White <input type="checkbox"/>	MC512PA	1SNK145082R0000	1	10.00
801->900	100	White <input type="checkbox"/>	MC512PA	1SNK145092R0000	1	10.00
901->1000	100	White <input type="checkbox"/>	MC512PA	1SNK145102R0000	1	10.00
A (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146012R0000	1	10.00
B (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146022R0000	1	10.00
C (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146032R0000	1	10.00
D (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146042R0000	1	10.00
E (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146052R0000	1	10.00
F (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146062R0000	1	10.00
G (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146072R0000	1	10.00
H (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146082R0000	1	10.00
I (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146092R0000	1	10.00
J (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146102R0000	1	10.00
K (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146112R0000	1	10.00
L (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146122R0000	1	10.00
M (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146132R0000	1	10.00
N (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146142R0000	1	10.00
O (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146152R0000	1	10.00
P (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146162R0000	1	10.00
Q (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146172R0000	1	10.00
R (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146182R0000	1	10.00
S (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146192R0000	1	10.00
T (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146202R0000	1	10.00
U (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146212R0000	1	10.00
V (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146222R0000	1	10.00

Continue on next page →

All the technical data for UL/CSA standard and dimensions in inches are in italic.

MC512PA terminal block markers

Pre-printed marker card for vertical terminal block assembly



MC512PA



5.2 mm 0.205 in spacing

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
← Continuation of previous page						
W (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146232R0000	1	10.00
X (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146242R0000	1	10.00
Y (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146252R0000	1	10.00
Z (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK146262R0000	1	10.00
0 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147002R0000	1	10.00
1 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147012R0000	1	10.00
2 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147022R0000	1	10.00
3 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147032R0000	1	10.00
4 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147042R0000	1	10.00
5 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147052R0000	1	10.00
6 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147062R0000	1	10.00
7 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147072R0000	1	10.00
8 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147082R0000	1	10.00
9 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK147092R0000	1	10.00
+ (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148002R0000	1	10.00
- (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148012R0000	1	10.00
~ (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148022R0000	1	10.00
= (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148032R0000	1	10.00
≠ (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148042R0000	1	10.00
L1 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148052R0000	1	10.00
L2 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148062R0000	1	10.00
L3 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148072R0000	1	10.00
PE (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148092R0000	1	10.00
U1 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148102R0000	1	10.00
U2 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148112R0000	1	10.00
U3 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148122R0000	1	10.00
V1 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148132R0000	1	10.00
V2 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148142R0000	1	10.00
V3 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148152R0000	1	10.00
W1 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148162R0000	1	10.00
W2 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148172R0000	1	10.00
W3 (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148182R0000	1	10.00
+24V (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148192R0000	1	10.00
+48V (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148202R0000	1	10.00
-24V (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148212R0000	1	10.00
-48V (x100)	100	White <input type="checkbox"/>	MC512PA	1SNK148222R0000	1	10.00
L1-L2-L3-N-PE (x20)	100	White <input type="checkbox"/>	MC512PA	1SNK149002R0000	1	10.00
U1-U2-U3-V1-V2-V3-W1-W2-W3 (x10) + U1 (x10)	100	White <input type="checkbox"/>	MC512PA	1SNK149012R0000	1	10.00

Terminal block markers

Blank card in polycarbonate - 6 mm 0.236 in spacing



MC612



HTP500-V2 KIT

MC612 terminal block markers

Description

- MC612 marker card in polycarbonate for high marking quality, durability and speed when marked with the HTP500 printer,
- Excellent marking durability in the most severe environments,
- Improved marking visibility thanks to the increased marking surface +20% (12 mm 0.472 in).

Main technical data

Material	Flammability	Maximum printed digits				Dimensions	
		mm		inches			
Polycarbonate	V0	Horizontal	3	Vertical	8	5.6 x 12	0.220 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
Blank card	39	White <input type="checkbox"/>	MC612	1SNK150000R0000	22	10.00
		Yellow <input checked="" type="checkbox"/>	MC612-YL	1SNK150004R0000	22	10.00


Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Thermal transfer printer	HTP500-V2 KIT	1SNA235700R1500	1	16000.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Marking support plate for MC and RCTT marker cards (HTP500)	HTP500-PL2	1SNA235705R0600	1	291.00

6



MG-CPM-13



MG3 KIT

MG-CPM-13 terminal block markers

Description

- MG-CPM-13 41791 and 41741 markers are used for marking 6 mm 0.236 in spacing SNK terminal blocks,
- Provide an elevate mechanical robustness, high dimensional stability and are halogen free,
- Single application on terminal block,
- 35 cards per packing.

Main technical data

Material	Flammability	Maximum printed digits				Dimensions	
		mm		inches			
Polycarbonate	V0	Horizontal	3	Vertical	8	5.6 x 12	0.236 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg marker	Weight (1 pce) g
Blank card	48	White <input type="checkbox"/>	MG-CPM-13 41791	1SNB041791R0612	1680	0.273
		Yellow <input checked="" type="checkbox"/>	MG-CPM 13 41741	1SNB041741R0612	1680	0.273

Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Thermal transfer printer	MG3 KIT	1SNB419001R0000	1	12600.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Support plate for MG-CPM-13	MG2-ETB 991016	1SNB991016R0000	1	100.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.

1SNK160006S0201 - Rev. A

Terminal block markers

Blank card in polyamide - 6 mm *0.236 in* spacing



MC612



AMS 500

MC612PA terminal block markers

Description

- MC612PA marker card in polyamide to be marked on AMS 500 marking table for medium scale volumes and standard industrial applications,
- Terminal blocks are directly independent after strip mounting,
- Improved marking visibility thanks to the increased marking surface +20% (12 mm *0.472 in*).

Main technical data

Material	Flammability	Maximum printed digits		Dimensions	
		Horizontal	Vertical	mm	inches
Polyamide	V2	3	8	5,6 x 12	<i>0.220 x 0.472</i>

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
Blank card	100	White <input type="checkbox"/>	MC612PA	1SNK159999R0000	20	11.00

Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
AMS plotter	KIT MAO AMS 500	1SNA360000R2400	1	12600.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Marking support plate for MC PA marker cards (3 MC PA marker cards per plate)	SPRC 30-3	1SNA360039R1700	1	300.00

MC612PA terminal block markers

Pre-printed marker card for horizontal terminal block assembly



MC612PA



6 mm 0.236 in spacing

Description

Save printing time with our large pre-printed cards offer with pre-printed numbers, letters or symbols.

Main technical data

Material	Flammability	Dimensions	
		mm	inches
Polyamide	V2	5.6 x 12	0.220 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
0->9 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150091R0000	1	11.00
1->10 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150011R0000	1	11.00
11->20 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150021R0000	1	11.00
21->30 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150031R0000	1	11.00
31->40 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150041R0000	1	11.00
41->50 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150051R0000	1	11.00
51->60 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150061R0000	1	11.00
61->70 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150071R0000	1	11.00
71->80 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150081R0000	1	11.00
81->90 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150083R0000	1	11.00
91->100 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150101R0000	1	11.00
101->110 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150111R0000	1	11.00
111->120 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150121R0000	1	11.00
121->130 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150131R0000	1	11.00
131->140 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150141R0000	1	11.00
141->150 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150151R0000	1	11.00
151->160 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150161R0000	1	11.00
161->170 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150171R0000	1	11.00
171->180 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150181R0000	1	11.00
181->190 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150191R0000	1	11.00
191->200 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150201R0000	1	11.00
1->100	100	White <input type="checkbox"/>	MC612PA	1SNK155011R0000	1	11.00
101->200	100	White <input type="checkbox"/>	MC612PA	1SNK155021R0000	1	11.00
201->300	100	White <input type="checkbox"/>	MC612PA	1SNK155031R0000	1	11.00
301->400	100	White <input type="checkbox"/>	MC612PA	1SNK155041R0000	1	11.00
401->500	100	White <input type="checkbox"/>	MC612PA	1SNK155051R0000	1	11.00
501->600	100	White <input type="checkbox"/>	MC612PA	1SNK155061R0000	1	11.00
601->700	100	White <input type="checkbox"/>	MC612PA	1SNK155071R0000	1	11.00
701->800	100	White <input type="checkbox"/>	MC612PA	1SNK155081R0000	1	11.00
801->900	100	White <input type="checkbox"/>	MC612PA	1SNK155091R0000	1	11.00
A (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156011R0000	1	11.00
B (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156021R0000	1	11.00
C (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156031R0000	1	11.00
D (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156041R0000	1	11.00
E (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156051R0000	1	11.00
F (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156061R0000	1	11.00
G (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156071R0000	1	11.00
H (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156081R0000	1	11.00
I (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156091R0000	1	11.00
J (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156101R0000	1	11.00
K (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156111R0000	1	11.00
L (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156121R0000	1	11.00
M (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156131R0000	1	11.00
N (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156141R0000	1	11.00
O (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156151R0000	1	11.00
P (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156161R0000	1	11.00
Q (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156171R0000	1	11.00
R (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156181R0000	1	11.00
S (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156191R0000	1	11.00
T (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156201R0000	1	11.00
U (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156211R0000	1	11.00
V (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156221R0000	1	11.00
W (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156231R0000	1	11.00

Continue on next page →

All the technical data for UL/CSA standard and dimensions in inches are in italic.

MC612PA terminal block markers

Pre-printed marker card for horizontal terminal block assembly



MC612PA



6 mm 0.236 in spacing

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
← Continuation of previous page						
X (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156241R0000	1	11.00
Y (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156251R0000	1	11.00
Z (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156261R0000	1	11.00
0 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157001R0000	1	11.00
1 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157011R0000	1	11.00
2 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157021R0000	1	11.00
3 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157031R0000	1	11.00
4 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157041R0000	1	11.00
5 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157051R0000	1	11.00
6 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157061R0000	1	11.00
7 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157071R0000	1	11.00
8 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157081R0000	1	11.00
9 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK157091R0000	1	11.00
+ (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158001R0000	1	11.00
- (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158011R0000	1	11.00
~ (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158021R0000	1	11.00
= (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158031R0000	1	11.00
Ground (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158041R0000	1	11.00
L1 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158051R0000	1	11.00
L2 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158061R0000	1	11.00
L3 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158071R0000	1	11.00
PE (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158091R0000	1	11.00
U1 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158101R0000	1	11.00
U2 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158111R0000	1	11.00
U3 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158121R0000	1	11.00
V1 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158131R0000	1	11.00
V2 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158141R0000	1	11.00
V3 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158151R0000	1	11.00
W1 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158161R0000	1	11.00
W2 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158171R0000	1	11.00
W3 (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK158181R0000	1	11.00
L1-L2-L3-N-PE (x20)	100	White <input type="checkbox"/>	MC612PA	1SNK159001R0000	1	11.00
U1-U2-U3-V1-V2-V3-W1-W2-W3 (x10) + U1 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK159011R0000	1	11.00

MC612PA terminal block markers

Pre-printed marker card for vertical terminal block assembly



MC612PA



6 mm 0.236 in spacing

Description

Save printing time with our large pre-printed cards offer with pre-printed numbers, letters or symbols.

Main technical data

Material	Flammability	Dimensions	
		mm	inches
Polyamide	V2	5.6 x 12	0.220 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
0->9 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150092R0000	1	11.00
1->10 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150012R0000	1	11.00
11->20 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150022R0000	1	11.00
21->30 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150032R0000	1	11.00
31->40 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150042R0000	1	11.00
41->50 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150052R0000	1	11.00
51->60 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150062R0000	1	11.00
61->70 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150072R0000	1	11.00
71->80 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150082R0000	1	11.00
81->90 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150084R0000	1	11.00
91->100 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150102R0000	1	11.00
101->110 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150112R0000	1	11.00
111->120 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150122R0000	1	11.00
121->130 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150132R0000	1	11.00
131->140 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150142R0000	1	11.00
141->150 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150152R0000	1	11.00
151->160 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150162R0000	1	11.00
161->170 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150172R0000	1	11.00
171->180 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150182R0000	1	11.00
181->190 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150192R0000	1	11.00
191->200 (x10)	100	White <input type="checkbox"/>	MC612PA	1SNK150202R0000	1	11.00
1->100	100	White <input type="checkbox"/>	MC612PA	1SNK155012R0000	1	11.00
101->200	100	White <input type="checkbox"/>	MC612PA	1SNK155022R0000	1	11.00
201->300	100	White <input type="checkbox"/>	MC612PA	1SNK155032R0000	1	11.00
301->400	100	White <input type="checkbox"/>	MC612PA	1SNK155042R0000	1	11.00
401->500	100	White <input type="checkbox"/>	MC612PA	1SNK155052R0000	1	11.00
501->600	100	White <input type="checkbox"/>	MC612PA	1SNK155062R0000	1	11.00
601->700	100	White <input type="checkbox"/>	MC612PA	1SNK155072R0000	1	11.00
701->800	100	White <input type="checkbox"/>	MC612PA	1SNK155082R0000	1	11.00
801->900	100	White <input type="checkbox"/>	MC612PA	1SNK155092R0000	1	11.00
901->1000	100	White <input type="checkbox"/>	MC612PA	1SNK155102R0000	1	11.00
A (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156012R0000	1	11.00
B (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156022R0000	1	11.00
C (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156032R0000	1	11.00
D (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156042R0000	1	11.00
E (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156052R0000	1	11.00
F (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156062R0000	1	11.00
G (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156072R0000	1	11.00
H (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156082R0000	1	11.00
I (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156092R0000	1	11.00
J (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156102R0000	1	11.00
K (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156112R0000	1	11.00
L (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156122R0000	1	11.00
M (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156132R0000	1	11.00
N (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156142R0000	1	11.00
O (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156152R0000	1	11.00
P (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156162R0000	1	11.00
Q (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156172R0000	1	11.00
R (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156182R0000	1	11.00
S (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156192R0000	1	11.00
T (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156202R0000	1	11.00
U (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156212R0000	1	11.00
V (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156222R0000	1	11.00
W (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156232R0000	1	11.00
X (x100)	100	White <input type="checkbox"/>	MC612PA	1SNK156242R0000	1	11.00

Continue on next page →

All the technical data for UL/CSA standard and dimensions in inches are in italic.

MC612PA terminal block markers

Pre-printed marker card for vertical terminal block assembly



MC612PA



6 mm 0.236 in spacing

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce)
← Continuation of previous page						
Y (x100)	100	White	MC612PA	1SNK156252R0000	1	11.00
Z (x100)	100	White	MC612PA	1SNK156262R0000	1	11.00
0 (x100)	100	White	MC612PA	1SNK157002R0000	1	11.00
1 (x100)	100	White	MC612PA	1SNK157012R0000	1	11.00
2 (x100)	100	White	MC612PA	1SNK157022R0000	1	11.00
3 (x100)	100	White	MC612PA	1SNK157032R0000	1	11.00
4 (x100)	100	White	MC612PA	1SNK157042R0000	1	11.00
5 (x100)	100	White	MC612PA	1SNK157052R0000	1	11.00
6 (x100)	100	White	MC612PA	1SNK157062R0000	1	11.00
7 (x100)	100	White	MC612PA	1SNK157072R0000	1	11.00
8 (x100)	100	White	MC612PA	1SNK157082R0000	1	11.00
9 (x100)	100	White	MC612PA	1SNK157092R0000	1	11.00
+ (x100)	100	White	MC612PA	1SNK158002R0000	1	11.00
- (x100)	100	White	MC612PA	1SNK158012R0000	1	11.00
~ (x100)	100	White	MC612PA	1SNK158022R0000	1	11.00
= (x100)	100	White	MC612PA	1SNK158032R0000	1	11.00
± (x100)	100	White	MC612PA	1SNK158042R0000	1	11.00
L1 (x100)	100	White	MC612PA	1SNK158052R0000	1	11.00
L2 (x100)	100	White	MC612PA	1SNK158062R0000	1	11.00
L3 (x100)	100	White	MC612PA	1SNK158072R0000	1	11.00
PE (x100)	100	White	MC612PA	1SNK158092R0000	1	11.00
U1 (x100)	100	White	MC612PA	1SNK158102R0000	1	11.00
U2 (x100)	100	White	MC612PA	1SNK158112R0000	1	11.00
U3 (x100)	100	White	MC612PA	1SNK158122R0000	1	11.00
V1 (x100)	100	White	MC612PA	1SNK158132R0000	1	11.00
V2 (x100)	100	White	MC612PA	1SNK158142R0000	1	11.00
V3 (x100)	100	White	MC612PA	1SNK158152R0000	1	11.00
W1 (x100)	100	White	MC612PA	1SNK158162R0000	1	11.00
W2 (x100)	100	White	MC612PA	1SNK158172R0000	1	11.00
W3 (x100)	100	White	MC612PA	1SNK158182R0000	1	11.00
+24V (x100)	100	White	MC612PA	1SNK158192R0000	1	11.00
+48V (x100)	100	White	MC612PA	1SNK158202R0000	1	11.00
-24V (x100)	100	White	MC612PA	1SNK158212R0000	1	11.00
-48V (x100)	100	White	MC612PA	1SNK158222R0000	1	11.00
L1-L2-L3-N-PE (x20)	100	White	MC612PA	1SNK159002R0000	1	11.00
U1-U2-U3-V1-V2-V3-W1-W2-W3 (x10) + U1 (x10)	100	White	MC612PA	1SNK159012R0000	1	11.00

MC812 terminal block markers

Blank card in polycarbonate or polyamide - 8 mm 0.315 in spacing



MC812



HTP500-V2 KIT

MC812 terminal block markers

Description

- MC812 marker card in polycarbonate for high marking quality, durability and speed when marked with the HTP500 printer,
- Excellent marking durability in the most severe environments,
- Improved marking visibility thanks to the increased marking surface +20% (12 mm 0.472 in)

Main technical data

Material	Flammability	Maximum printed digits				Dimensions	
		Horizontal	Vertical	Horizontal	Vertical	mm	inches
Polycarbonate	V0	4	8	7.6 x 12	0.299 x 0.472		

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
Blank card	30	White <input type="checkbox"/>	MC812	1SNK160000R0000	22	10.00
		Yellow <input type="checkbox"/>	MC812-YL	1SNK160004R0000	22	10.00

Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Thermal transfer printer	HTP500-V2 KIT	1SNA235700R1500	1	16000.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Marking support plate for MC and RCTT marker cards (HTP500)	HTP500-PL2	1SNA235705R0600	1	291.00

6



MC812PA



AMS 500

MC812PA terminal block markers

Description

- MC812PA marker card in polyamide to be marked on AMS 500 marking table for medium scale volumes and standard industrial applications,
- Terminal blocks are directly independent after strip mounting,
- Improved marking visibility thanks to the increased marking surface +20% (12 mm 0.472 in)

Main technical data

Material	Flammability	Maximum printed digits				Dimensions	
		Horizontal	Vertical	Horizontal	Vertical	mm	inches
Polyamide	V2	3	8	7.6 x 12	0.299 x 0.472		

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
Blank card	100	White <input type="checkbox"/>	MC812PA	1SNK169999R0000	20	14.00

Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
AMS plotter	KIT MAO AMS 500	1SNA360000R2400	1	12600.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Marking support plate for MC PA marker cards (3 MC PA marker cards per plate)	SPRC 30-3	1SNA360039R1700	1	300.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.

MC812PA terminal block markers

Pre-printed marker card for horizontal terminal block assembly



MC812PA



8 mm 0.315 in spacing

Description

Save printing time with our large pre-printed cards offer with pre-printed numbers, letters or symbols.

Main technical data

Material	Flammability	Dimensions	
		mm	inches
Polyamide	V2	7.6 x 12	0.299 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
0->9 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160091R0000	1	14.00
1->10 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160011R0000	1	14.00
11->20 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160021R0000	1	14.00
21->30 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160031R0000	1	14.00
31->40 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160041R0000	1	14.00
41->50 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160051R0000	1	14.00
51->60 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160061R0000	1	14.00
61->70 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160071R0000	1	14.00
71->80 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160081R0000	1	14.00
81->90 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160083R0000	1	14.00
91->100 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160101R0000	1	14.00
101->110 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160111R0000	1	14.00
111->120 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160121R0000	1	14.00
121->130 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160131R0000	1	14.00
131->140 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160141R0000	1	14.00
141->150 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160151R0000	1	14.00
151->160 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160161R0000	1	14.00
161->170 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160171R0000	1	14.00
171->180 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160181R0000	1	14.00
181->190 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160191R0000	1	14.00
191->200 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160201R0000	1	14.00
1->100	100	White <input type="checkbox"/>	MC812PA	1SNK165011R0000	1	14.00
101->200	100	White <input type="checkbox"/>	MC812PA	1SNK165021R0000	1	14.00
201->300	100	White <input type="checkbox"/>	MC812PA	1SNK165031R0000	1	14.00
301->400	100	White <input type="checkbox"/>	MC812PA	1SNK165041R0000	1	14.00
401->500	100	White <input type="checkbox"/>	MC812PA	1SNK165051R0000	1	14.00
501->600	100	White <input type="checkbox"/>	MC812PA	1SNK165061R0000	1	14.00
601->700	100	White <input type="checkbox"/>	MC812PA	1SNK165071R0000	1	14.00
701->800	100	White <input type="checkbox"/>	MC812PA	1SNK165081R0000	1	14.00
801->900	100	White <input type="checkbox"/>	MC812PA	1SNK165091R0000	1	14.00
A (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166011R0000	1	14.00
B (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166021R0000	1	14.00
C (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166031R0000	1	14.00
D (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166041R0000	1	14.00
E (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166051R0000	1	14.00
F (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166061R0000	1	14.00
G (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166071R0000	1	14.00
H (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166081R0000	1	14.00
I (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166091R0000	1	14.00
J (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166101R0000	1	14.00
K (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166111R0000	1	14.00
L (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166121R0000	1	14.00
M (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166131R0000	1	14.00
N (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166141R0000	1	14.00
O (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166151R0000	1	14.00
P (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166161R0000	1	14.00
Q (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166171R0000	1	14.00
R (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166181R0000	1	14.00
S (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166191R0000	1	14.00
T (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166201R0000	1	14.00
U (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166211R0000	1	14.00
V (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166221R0000	1	14.00

Continue on next page →

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

MC812PA terminal block markers

Pre-printed marker card for horizontal terminal block assembly



MC812PA



8 mm 0.315 in spacing

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce)
← Continuation of previous page						
W (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166231R0000	1	14.00
X (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166241R0000	1	14.00
Y (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166251R0000	1	14.00
Z (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166261R0000	1	14.00
0 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167001R0000	1	14.00
1 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167011R0000	1	14.00
2 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167021R0000	1	14.00
3 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167031R0000	1	14.00
4 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167041R0000	1	14.00
5 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167051R0000	1	14.00
6 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167061R0000	1	14.00
7 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167071R0000	1	14.00
8 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167081R0000	1	14.00
9 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK167091R0000	1	14.00
+ (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168001R0000	1	14.00
- (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168011R0000	1	14.00
~ (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168021R0000	1	14.00
= (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168031R0000	1	14.00
± (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168041R0000	1	14.00
L1 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168051R0000	1	14.00
L2 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168061R0000	1	14.00
L3 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168071R0000	1	14.00
PE (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168091R0000	1	14.00
U1 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168101R0000	1	14.00
U2 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168111R0000	1	14.00
U3 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168121R0000	1	14.00
V1 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168131R0000	1	14.00
V2 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168141R0000	1	14.00
V3 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168151R0000	1	14.00
W1 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168161R0000	1	14.00
W2 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168171R0000	1	14.00
W3 (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK168181R0000	1	14.00
L1-L2-L3-N-PE (x20)	100	White <input type="checkbox"/>	MC812PA	1SNK169001R0000	1	14.00
U1-U2-U3-V1-V2-V3-W1-W2-W3 (x10) + U1 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK169011R0000	1	14.00

MC812PA terminal block markers

Pre-printed marker card for vertical terminal block assembly



MC812PA



8 mm 0.315 in spacing

Description

Save printing time with our large pre-printed cards offer with pre-printed numbers, letters or symbols.

Main technical data

Material	Flammability	Dimensions	
		mm	inches
Polyamide	V2	7.6 x 12	0.299 x 0.472

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce) g
0->9 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160092R0000	1	14.00
1->10 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160012R0000	1	14.00
11->20 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160022R0000	1	14.00
21->30 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160032R0000	1	14.00
31->40 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160042R0000	1	14.00
41->50 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160052R0000	1	14.00
51->60 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160062R0000	1	14.00
61->70 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160072R0000	1	14.00
71->80 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160082R0000	1	14.00
81->90 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160084R0000	1	14.00
91->100 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160102R0000	1	14.00
101->110 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160112R0000	1	14.00
111->120 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160122R0000	1	14.00
121->130 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160132R0000	1	14.00
131->140 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160142R0000	1	14.00
141->150 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160152R0000	1	14.00
151->160 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160162R0000	1	14.00
161->170 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160172R0000	1	14.00
171->180 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160182R0000	1	14.00
181->190 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160192R0000	1	14.00
191->200 (x10)	100	White <input type="checkbox"/>	MC812PA	1SNK160202R0000	1	14.00
1->100	100	White <input type="checkbox"/>	MC812PA	1SNK165012R0000	1	14.00
101->200	100	White <input type="checkbox"/>	MC812PA	1SNK165022R0000	1	14.00
201->300	100	White <input type="checkbox"/>	MC812PA	1SNK165032R0000	1	14.00
301->400	100	White <input type="checkbox"/>	MC812PA	1SNK165042R0000	1	14.00
401->500	100	White <input type="checkbox"/>	MC812PA	1SNK165052R0000	1	14.00
501->600	100	White <input type="checkbox"/>	MC812PA	1SNK165062R0000	1	14.00
601->700	100	White <input type="checkbox"/>	MC812PA	1SNK165072R0000	1	14.00
701->800	100	White <input type="checkbox"/>	MC812PA	1SNK165082R0000	1	14.00
801->900	100	White <input type="checkbox"/>	MC812PA	1SNK165092R0000	1	14.00
901->1000	100	White <input type="checkbox"/>	MC812PA	1SNK165102R0000	1	14.00
A (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166012R0000	1	14.00
B (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166022R0000	1	14.00
C (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166032R0000	1	14.00
D (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166042R0000	1	14.00
E (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166052R0000	1	14.00
F (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166062R0000	1	14.00
G (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166072R0000	1	14.00
H (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166082R0000	1	14.00
I (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166092R0000	1	14.00
J (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166102R0000	1	14.00
K (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166112R0000	1	14.00
L (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166122R0000	1	14.00
M (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166132R0000	1	14.00
N (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166142R0000	1	14.00
O (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166152R0000	1	14.00
P (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166162R0000	1	14.00
Q (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166172R0000	1	14.00
R (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166182R0000	1	14.00
S (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166192R0000	1	14.00
T (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166202R0000	1	14.00
U (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166212R0000	1	14.00
V (x100)	100	White <input type="checkbox"/>	MC812PA	1SNK166222R0000	1	14.00

Continue on next page →

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

MC812PA terminal block markers

Pre-printed marker card for vertical terminal block assembly



MC812PA



8 mm 0.315 in spacing

Ordering details

Description	Number of markers per card	Color	Type	Order code	Pkg card	Weight (1 pce)
← Continuation of previous page						
W (x100)	100	White	MC812PA	1SNK166232R0000	1	14.00
X (x100)	100	White	MC812PA	1SNK166242R0000	1	14.00
Y (x100)	100	White	MC812PA	1SNK166252R0000	1	14.00
Z (x100)	100	White	MC812PA	1SNK166262R0000	1	14.00
0 (x100)	100	White	MC812PA	1SNK167002R0000	1	14.00
1 (x100)	100	White	MC812PA	1SNK167012R0000	1	14.00
2 (x100)	100	White	MC812PA	1SNK167022R0000	1	14.00
3 (x100)	100	White	MC812PA	1SNK167032R0000	1	14.00
4 (x100)	100	White	MC812PA	1SNK167042R0000	1	14.00
5 (x100)	100	White	MC812PA	1SNK167052R0000	1	14.00
6 (x100)	100	White	MC812PA	1SNK167062R0000	1	14.00
7 (x100)	100	White	MC812PA	1SNK167072R0000	1	14.00
8 (x100)	100	White	MC812PA	1SNK167082R0000	1	14.00
9 (x100)	100	White	MC812PA	1SNK167092R0000	1	14.00
+ (x100)	100	White	MC812PA	1SNK168002R0000	1	14.00
- (x100)	100	White	MC812PA	1SNK168012R0000	1	14.00
~ (x100)	100	White	MC812PA	1SNK168022R0000	1	14.00
= (x100)	100	White	MC812PA	1SNK168032R0000	1	14.00
± (x100)	100	White	MC812PA	1SNK168042R0000	1	14.00
L1 (x100)	100	White	MC812PA	1SNK168052R0000	1	14.00
L2 (x100)	100	White	MC812PA	1SNK168062R0000	1	14.00
L3 (x100)	100	White	MC812PA	1SNK168072R0000	1	14.00
PE (x100)	100	White	MC812PA	1SNK168092R0000	1	14.00
U1 (x100)	100	White	MC812PA	1SNK168102R0000	1	14.00
U2 (x100)	100	White	MC812PA	1SNK168112R0000	1	14.00
U3 (x100)	100	White	MC812PA	1SNK168122R0000	1	14.00
V1 (x100)	100	White	MC812PA	1SNK168132R0000	1	14.00
V2 (x100)	100	White	MC812PA	1SNK168142R0000	1	14.00
V3 (x100)	100	White	MC812PA	1SNK168152R0000	1	14.00
W1 (x100)	100	White	MC812PA	1SNK168162R0000	1	14.00
W2 (x100)	100	White	MC812PA	1SNK168172R0000	1	14.00
W3 (x100)	100	White	MC812PA	1SNK168182R0000	1	14.00
+24V (x100)	100	White	MC812PA	1SNK168192R0000	1	14.00
+48V (x100)	100	White	MC812PA	1SNK168202R0000	1	14.00
-24V (x100)	100	White	MC812PA	1SNK168212R0000	1	14.00
-48V (x100)	100	White	MC812PA	1SNK168222R0000	1	14.00
L1-L2-L3-N-PE (x20)	100	White	MC812PA	1SNK169002R0000	1	14.00
U1-U2-U3-V1-V2-V3-W1-W2-W3 (x10) + U1 (x10)	100	White	MC812PA	1SNK169012R0000	1	14.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.

UMH universal wire markers holder

MG2-TDMO clip-on blank wire marker

Markers and marking systems



5.2 mm 0.205 in spacing

Mounting instructions



Install the UMH on the terminal blocks (strip mounting) and slide on the wire markers.

UMH universal wire markers holder

Description


- Compatible with MG2 - TDMO wire markers and most of the wire markers available on the market (wire markers not supplied with UMH);
- Quickly put it on any SNK terminal blocks and accessories: strip mounting of 10 parts for 5.2 mm 0.205 in spacing, unitary mounting for other spacings.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
5.2 mm 0.205 in spacing	Grey <input type="checkbox"/>	UMH	1SNK900611R0000	10	0.20

Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F2		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	



MG2-TDMO

MG2-TDMO clip-on blank wire marker

Description

- Rigid Polycarbonate marker to be directly printed and snapped on the wire or the UMH wire marker holder,
- Print with support plate MG2-PTM.

Main technical data

Material	Flammability	Temperature range
PC	V0	-40°C ... +140°C, -22°F ... +176°F

Ordering details

Dimensions mm	in	Number of markers per card	Color	Type	Order code	SW code	Pkg qty	Weight (1 pce) g
MG2-TDMO-01								
4 x 12	0.157 x 0.472	40	White <input type="checkbox"/>	MG2-TDMO-01 40390	1SNB040390R0412	125	880	0.30
4 x 16	0.157 x 0.630	40	White <input type="checkbox"/>	MG2-TDMO-01 40391	1SNB040391R0416	128	880	0.30
4 x 12	0.157 x 0.472	40	Yellow <input checked="" type="checkbox"/>	MG2-TDMO-01 40340	1SNB040340R0412	125	800	0.30
4 x 16	0.157 x 0.630	40	Yellow <input checked="" type="checkbox"/>	MG2-TDMO-01 40341	1SNB040341R0416	128	800	0.30
MG2-TDMO-02								
4 x 12	0.157 x 0.472	40	White <input type="checkbox"/>	MG2-TDMO-02 40490	1SNB040490R0412	126	640	0.40
4 x 16	0.157 x 0.630	40	White <input type="checkbox"/>	MG2-TDMO-02 40491	1SNB040491R0416	129	640	0.40
4 x 12	0.157 x 0.472	40	Yellow <input checked="" type="checkbox"/>	MG2-TDMO-02 40440	1SNB040440R0412	126	640	0.40
4 x 16	0.157 x 0.630	40	Yellow <input checked="" type="checkbox"/>	MG2-TDMO-02 40441	1SNB040441R0416	129	640	0.40
MG2-TDMO-03								
4 x 12	0.157 x 0.472	40	White <input type="checkbox"/>	MG2-TDMO-03 40590	1SNB040590R0412	127	560	0.40
4 x 16	0.157 x 0.630	40	White <input type="checkbox"/>	MG2-TDMO-03 40591	1SNB040591R0416	130	560	0.40
4 x 12	0.157 x 0.472	40	Yellow <input checked="" type="checkbox"/>	MG2-TDMO-03 40540	1SNB040540R0412	127	560	0.40
4 x 16	0.157 x 0.630	40	Yellow <input checked="" type="checkbox"/>	MG2-TDMO-03 40541	1SNB040541R0416	130	560	0.40

Marking system

MG3 KIT <input checked="" type="checkbox"/>	AMS 250	AMS 500	HTP500
---	---------	---------	--------

Description	Support status	Type	Order code	Pkg qty	Weight (1 pce) g
-------------	----------------	------	------------	---------	------------------

Support plate

Support plate for cable tags MG2-TDMO & MG-TDM 4x16mm	Purchased separately	MG2-PTM 991010	1SNB991010R0000	1	116.00
--	----------------------	----------------	-----------------	---	--------

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.





MG3 KIT

MCLH label

Markers and marking systems



MCLH - MCLH-R1



MCLH label

Description

Identify your terminal blocks assembly with the self adhesive label adapted to the LH label holders.

Ordering details

Description	Number of labels per unit	Color	Type	Order code	Pkg qty	Weight (1 pce) g
for LH label holder	36	White <input type="checkbox"/>	MCLH	1SNK900630R0000	25	10.00
	36	Yellow <input checked="" type="checkbox"/>	MCLH-YL	1SNK900633R0000	25	10.00
for LH-R1 label holder	15	White <input type="checkbox"/>	MCLH-R1	1SNK900631R0000	25	10.00
	15	Yellow <input checked="" type="checkbox"/>	MCLH-R1-YL	1SNK900634R0000	25	10.00

Main technical data

Material specifications	Insulating material	PVC + adhesive acrylic	
	Flammability	V0	
	NF F 16 101		
Ambient temperature min/max	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F
	Storage	-55 ... +110 °C	-67 ... +230 °F
	Installing	-5 ... +40 °C	-23 ... +104 °F

Marking systems

Description	Type	Order code	Pkg qty	Weight (1 pce) g
AMS plotter	KIT MAO AMS 500	1SNA360000R2400	1	12600.00
Thermal transfer printer	HTP500-V2 KIT	1SNA235700R1500	1	16000.00

Marking systems accessories

Description	Type	Order code	Pkg qty	Weight (1 pce) g
Marking support plate for labels (AMS 500)	SPRC 21	1SNA360031R0600	1	851.00



AMS 500



HTP500-V2 KIT

All the technical data for UL/CSA standard and dimensions in inches are in italic.

HTP500 thermal transfer printer

Marking system



HTP500-V2 KIT



HTP500-CLEAN



HTP500-FEED



HTP500-PL2



RIB-B

Description

- Performance,
- High volume and serial production,
- Dedicated for ABB terminal blocks.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Thermal transfer printer KIT		HTP500-V2 KIT	1SNA235700R1500	1	
List of items included in the KIT :					
1 HTP500-V2 Thermal transfer printer		HTP500-V2			
1 software CD		HTS500			
1 power supply cable		HTP500-PW			
1 USB cable		HTP500-USB			
1 support table		HTP500-BAS			
1 universal feeder for marker cards		HTP500-FEED			
1 cleaning cassette		HTP500-CLEAN			
1 black ribbon cassette		RIB-B			
1 support plate for ABB terminal block markers		HTP500-PL2			
1 universal support plate for wire markers		HTP500-PL			

Feeders and support plates

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Universal feeder for marker cards		HTP500-FEED	1SNA235703R0400	1	
Support plate for ABB terminal block markers		HTP500-PL2	1SNA235705R0600	1	
Universal support plate for wire markers		HTP500-PL	1SNA235704R0500	1	

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Black ribbon cassette		RIB-B	1SNA235710R0600	3	
Red ribbon cassette for identification plates and adhesive labels		RIB-R	1SNA235711R2300	3	
Red ribbon cassette for terminal blocks and wire markers		RIB-RS	1SNA235718R0200	3	
Cleaning cassette		HTP500-CLEAN	1SNA235714R2600	1	
Standard cleaning roll ø18		HTP500-ROLL	1SNA235715R2700	1	
Printing head		HTP500-PRINT	1SNA235716R2000	1	
Dust cover for HTP500 and AMS 500 systems		DUST COVER	1SNA360161R1500	1	
Wooden box for HTP500-V2 KIT		HTP500-WB	1SNA235717R2100	1	
Software CD		HTS500	1SNA235702R0300	1	
Support table		HTP500-BAS	1SNA235706R0700	1	
Power supply cable		HTP500-PW	1SNA235709R1200	1	

MG3 thermal transfer printer

Kit and accessories



MG3 KIT

Description

- Versatile,
- Compact and robust,
- Easy to install and use.

Ordering details

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
MG3 Thermal transfer printer KIT		MG3 KIT	1SNB419001R0000	1	12600.00
List of items included in the KIT:					
1 MG3 Thermal transfer printer		MG3			
1 Software CD		MG3 SOFTWARE			
1 Power supply cable		MG3 POWER			
1 USB cable		MG3 USB			
1 Protective cover		MG2 COVE 991680			
1 Ribbon take up spool		MG2-CRB 991654			
1 Black monochrome ribbon		MG2-ETR 991600			
1 Support plate for cable tags MG-TPM		MG2-PWC 991000			
1 Support plate for labels, cables, plates and various markers		MG2-PLT 991002			
1 Support plate for terminal block markers MG-CPM-01(5x10 and 5x15),02,03,04,07		MG2-QTB 991011			
1 Support plate for SNK series terminal block markers (MG-CPM-13)		MG2-ETB 991016			

Support plates

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
Support template for:					
Cable tags MG-TPM		MG2-PWC 991000	1SNB991000R0000	1	148.00
Labels, cable tags, plates and various markers		MG2-PLT 991002	1SNB991002R0000	1	148.00
Terminal block markers MG-CPM-05,12		MG2-WTB 991004	1SNB991004R0000	1	151.00
Terminal block markers MG-CPM-06		MG2-STB 991005	1SNB991005R0000	1	158.00
Terminal block markers MG-CPM-10		MG2-CTB 991006	1SNB991006R0000	1	156.00
Cable tags MG-TDM (4x12 mm)		MG2-PTD 991007	1SNB991007R0000	1	126.00
Terminal block markers MG-CPM-01 (5x7 mm)		MG2-MTB 991008	1SNB991008R0000	1	149.00
Cable tags MG2-TDMO and MG-TDM (4x16 mm)		MG2-PTM 991010	1SNB991010R0000	1	116.00
Terminal block markers MG-CPM-01 (5x10 and 5x15 mm),02,03,04,07		MG2-QTB 991011	1SNB991011R0000	1	120.00
Terminal block markers ABB RC and MC series		MG2-ABM 991012	1SNB991012R0000	1	146.00
Terminal block markers MG-CPM-09		MG2-LTB 991013	1SNB991013R0000	1	128.00
Terminal block markers SNK series MG-CPM-13		MG2-ETB 991016	1SNB991016R0000	1	100.00

PET blank cover for support plate

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
PET blank for support plate MG2-PWC		MG2-TWC 991502	1SNB991502R0000	3	16.70
PET blank for support plate MG2-PLT		MG2-TLT 991522	1SNB991522R0000	3	14.70
PET blank for support plate MG2-PTD		MG2-TTD 991563	1SNB991563R0000	3	11.70
PET blank for support plate MG2-MTB		MG2-TMT 991513	1SNB991513R0000	3	12.00
PET blank for support plate MG2-WTB		MG2-TWT 991542	1SNB991542R0000	3	12.00
PET blank for support plate MG2-STB		MG2-TST 991552	1SNB991552R0000	3	21.50
PET blank for support plate MG2-CTB		MG2-TCT 991562	1SNB991562R0000	3	12.00
PET blank for support plate MG2-QTB		MG2-TGT 991532	1SNB991532R0000	3	11.70
PET blank for support plate MG2-ETB		MG2-TTB 991512	1SNB991512R0000	3	10.70

Accessories

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
Print head cleaning kit		MG2-CKP 991670	1SNB991670R0000	1	336.00
Black monochrome ribbon	Black ■	MG2-ETR 991600	1SNB991600R0000	1	227.00
Blue monochrome ribbon	Blue ■	MG2-ETR 991601	1SNB991601R0000	1	229.00
Red monochrome ribbon	Red ■	MG2-ETR 991602	1SNB991602R0000	1	255.00
Green monochrome ribbon	Green ■	MG2-ETR 991603	1SNB991603R0000	1	247.00
White monochrome ribbon	White □	MG2-ETR 991606	1SNB991606R0000	1	333.00



Ribbons MG2-ETR...

All the technical data for UL/CSA standard and dimensions in inches are in italic.

AMS plotter

Kit and accessories



AMS 500

AMS 500

Description

- For basic marking applications,
- Economic,
- Full-size format,
- Print original manufacturers' markers.

Ordering details

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
AMS 500 Plotter KIT		KIT MAO AMS 500	1SNA36000R2400	1	12600
List of items included in the KIT:					
1 AMS 500 plotter pen printer		AMS 500			
1 Software CD		AMS SOFTWARE			
1 Power supply cable		AMS POWER			
1 USB cable		AMS USB			
1 Support plate for RC / MC / RCTT / WMTT / BA4 / RCT		SPRC1			
1 Support plate for MC...PA		SPRC 90-3			
1 Plotter pen Ø 0.25 mm .01 in		AMS PEN 0.25			
1 Plotter pen Ø 0.35 mm .014 in		AMS PEN 0.35			
5 Ink cartridges		AMS INK CARTRIDGES			
1 Cleaner fluid		AMS CLEANER FLUID			
1 Cleaner kit		AMS CLEANER KIT			



AMS 250

AMS 250


Description

- Basic needs,
- Economic,
- Half-size format
- Compatible with most of AMS 500 accessories.

Ordering details

Description	Color	Type	Order code	Pkg pce	Weight (1 pce) g
AMS 250 Plotter KIT		AMS 250 BASIC KIT	1SNA36000R2500	1	8800
List of items included in the KIT:					
1 AMS 250 plotter pen printer		AMS 250 BASIC			
1 Software CD		AMS SOFTWARE			
1 Power supply cable		AMS POWER			
1 USB cable		AMS USB			
1 Support plate for BA4 / MC / RC / RCAL / RCT / RCTT		SPRC2			
1 Disposable plotter pen Ø 0.25 mm .01 in EDR ink		DISPOSABLE AMS PEN ED-R 0.25			
1 Disposable plotter pen Ø 0.35 mm .014 in EDR ink		DISPOSABLE AMS PEN ED-R 0.35			


AMS plotter Kit and accessories



SPRC1



SPRC2




SPRC30-3



AMS PEN



AMS CLEANER KIT



AMS INK CARTRIDGES

Support plates for ABB markers

Description	Compatibility		Type	Order code	Pkg pce	Weight (1 pce) g
	AMS 500	AMS 250				
Support plates for:						
RC/MC/RCTT/WMTT/BA4/RCT full format	●		SPRC 1	1SNA360010R1500	1	1500.00
RC/MC/RCTT/WMTT/BA4/RCT		●	SPRC 2	1SNA360011R1500	1	600.00
RB strips	●	●	SPRC 4	1SNA360014R0500	1	300.00
RTM7-9	●		SPRC 5	1SNA360015R0600	1	1700.00
PIB	●	●	SPRC 13	1SNA360023R0600	1	260.00
BA5-50	●	●	SPRC 14	1SNA360024R0700	1	300.00
RC-X10A	●	●	SPRC 15	1SNA360025R0000	1	300.00
2 RC cards	●	●	SPRC 16	1SNA360026R0100	1	300.00
WM markers	●	●	SPRC 26	1SNA360036R0300	1	300.00
PAM strip	●		SPRC 27	1SNA360037R0400	1	300.00
RPCV markers	●	●	SPRC 28	1SNA360040R2300	1	300.00
RCL, P, W510	●	●	SPRC 29	1SNA360038R1500	1	300.00
MC...PA	●	●	SPRC 30-3	1SNA360039R1700	1	500.00
A4 universal support plate	●	●	SPRC 21	1SNA360031R0600	1	500.00


Support plates for other manufacturers

Description	Compatibility		Type	Order code	Pkg pce	Weight (1 pce) g
	AMS 500	AMS 250				
Support plates for markers:						
Wieland	●	●	SPRC 6	1SNA360016R0700	1	350.00
Weidmüller	●	●	SPRC 7	1SNA360017R0000	1	400.00
Phoenix ZBM 5/6	●	●	SPRC 8	1SNA360018R1100	1	300.00
Phoenix ZB	●	●	SPRC 9	1SNA360019R1200	1	300.00
Allen Bradley WRZ	●	●	SPRC 10	1SNA360020R1700	1	330.00
Wago mini WSB5	●	●	SPRC 11	1SNA360021R0400	1	300.00

Accessories

Description	Diameter	Color	Type	Order code	Pkg pce	Weight (1 pce) g
Plotter pen P 2.0 black ink	Ø 0.18 mm 0.007 in	Red	AMS PEN 0.18	1SNA360103R1400	1	15.00
	Ø 0.25 mm 0.01 in	White	AMS PEN 0.25	1SNA360100R2500	1	15.00
	Ø 0.35 mm 0.014 in	Yellow	AMS PEN 0.35	1SNA360101R1200	1	15.00
	Ø 0.50 mm 0.02 in	Brown	AMS PEN 0.50	1SNA360104R1500	1	26.00
	Ø 0.70 mm 0.028 in	Blue	AMS PEN 0.70	1SNA360105R1600	1	26.00
	Ø 1.00 mm 0.039 in	Orange	AMS PEN 1.00	1SNA360106R1700	1	26.00
Disposable plotter pen P 2.0 black ink	Ø 0.25 mm 0.01 in	White	DISPOSABLE AMS PEN 0.25	1SNA360120R1000	1	24.00
	Ø 0.35 mm 0.014 in	Yellow	DISPOSABLE AMS PEN 0.35	1SNA360121R0500	1	24.00
Disposable plotter pen ED-R black ink	Ø 0.18 mm 0.007 in	Red	DISPOSABLE AMS PEN ED-R 0.18	1SNA360124R1000	1	24.00
	Ø 0.25 mm 0.01 in	White	DISPOSABLE AMS PEN ED-R 0.25	1SNA360122R1000	1	24.00
	Ø 0.35 mm 0.014 in	Yellow	DISPOSABLE AMS PEN ED-R 0.35	1SNA360123R0500	1	24.00
5 ink cartridges 1 ml			AMS INK CARTRIDGES	1SNA360150R2600	1	18.00
2 cleaner fluid bottles, 2x10 ml			AMS CLEANER FLUID	1SNA360155R1700	1	40.00
Cleaner kit including: 1 rinse bottle and 1 blotting paper			AMS CLEANER KIT	1SNA360156R1000	1	34.00
Dust cover			DUST COVER	1SNA360161R1500	1	200.00
Service kit for pen maintenance			SERVICE KIT FOR AMS 500	1SNA360162R1600	1	12.00
Self-adhesive support for support plate SPRC 1			SPDST1	1SNA360163R1700	1	70.00
Plotter head for AMS 500 including 1 printing module, 1 pen holder and 1 dust cover			PEN HOLDER	1SNA360098R1200	1	85.00

All the technical data for UL/CSA standard and dimensions in inches are in italic.

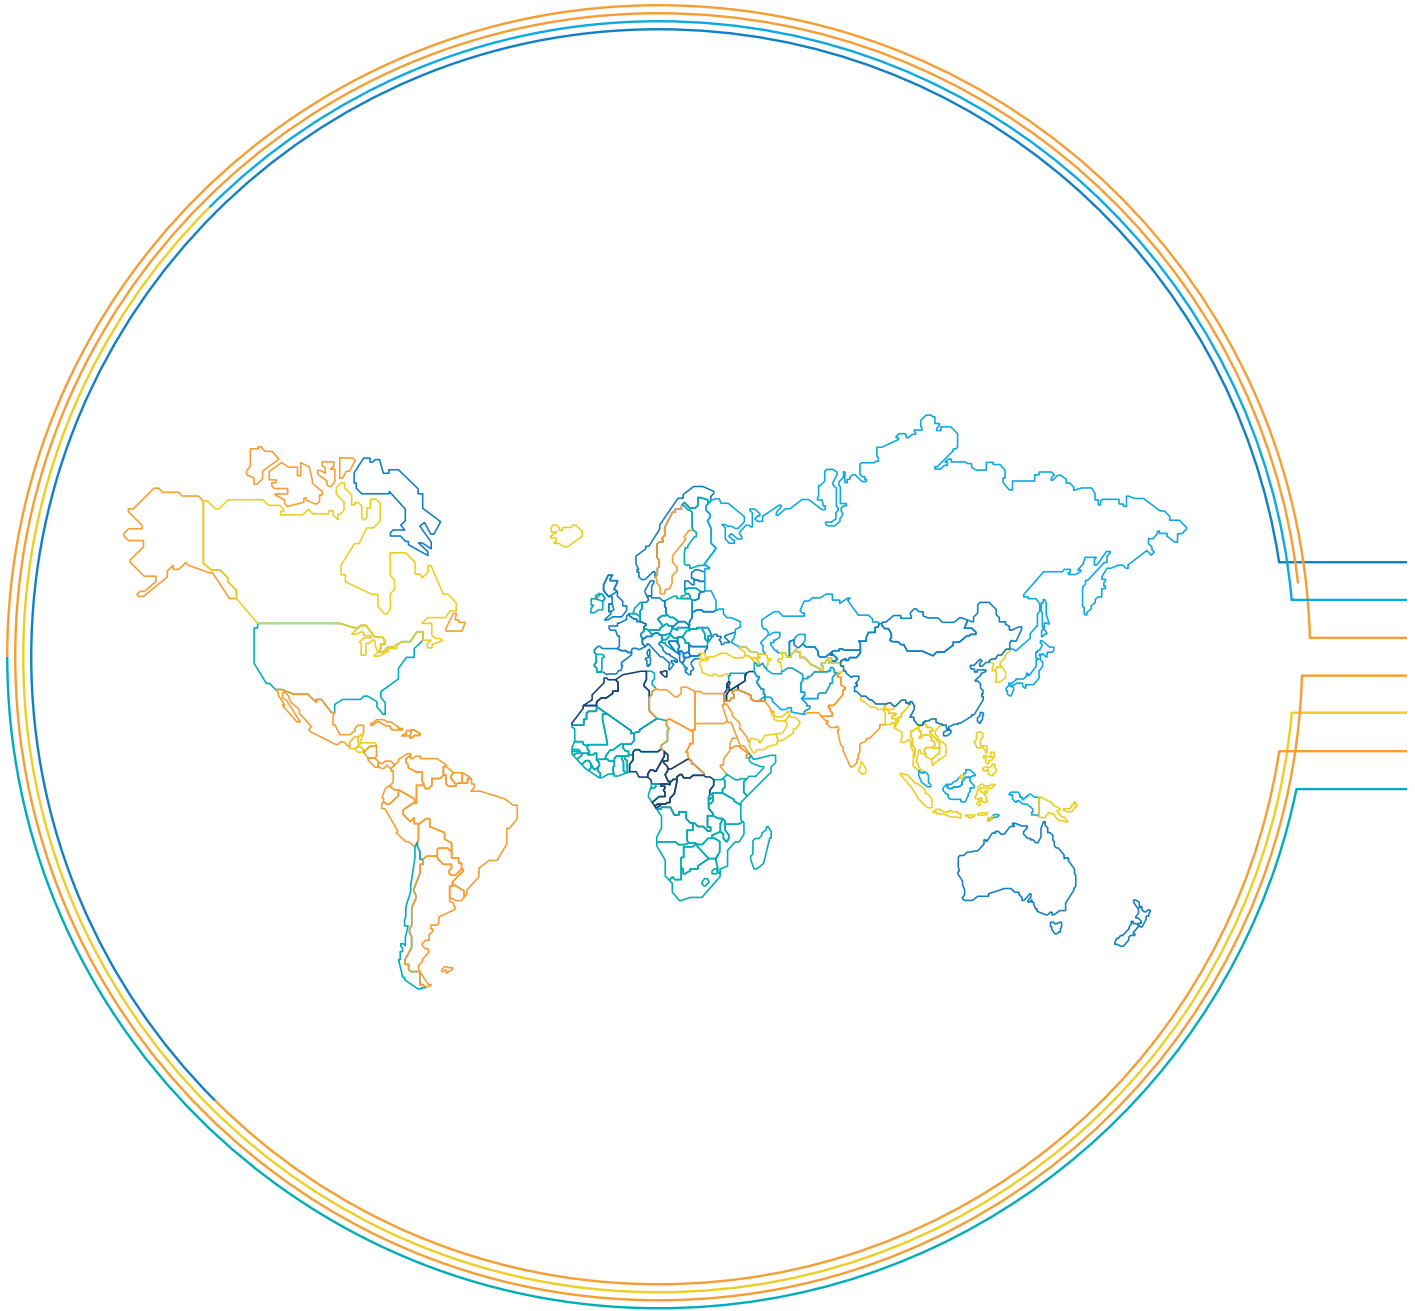

6

Index

Order code classification

Order code	Type	Page	Order code	Type	Page	Order code	Type	Page
1SNA116538R1700	PC8-2	176	1SNB040390R0412	MG2-TDMO-01 40390	213	1SNK140092R0000	MC512PA	200
1SNA116538R1700	PC8-2	176	1SNB040391R0416	MG2-TDMO-01 40391	213	1SNK140101R0000	MC512PA	198
1SNA116539R1000	PC8-3	176	1SNB040440R0412	MG2-TDMO-02 40440	213	1SNK140102R0000	MC512PA	200
1SNA116540R2500	PC8-4	176	1SNB040441R0416	MG2-TDMO-02 40441	213	1SNK140111R0000	MC512PA	198
1SNA163313R2400	PC8-10	176	1SNB040490R0412	MG2-TDMO-02 40490	213	1SNK140112R0000	MC512PA	200
1SNA164800R0300	PR3.G2	151	1SNB040491R0416	MG2-TDMO-02 40491	213	1SNK140121R0000	MC512PA	198
1SNA168500R1200	PR4	152	1SNB040540R0412	MG2-TDMO-03 40540	213	1SNK140122R0000	MC512PA	200
1SNA168672R1100	TGA8	99	1SNB040541R0416	MG2-TDMO-03 40541	213	1SNK140131R0000	MC512PA	198
1SNA168673R1200	TGA8	99	1SNB040590R0412	MG2-TDMO-03 40590	213	1SNK140132R0000	MC512PA	200
1SNA168674R1300	TGA8	99	1SNB040591R0416	MG2-TDMO-03 40591	213	1SNK140141R0000	MC512PA	198
1SNA168675R1400	ANT	99	1SNB041740R0512	MG-CPM 13 41740	196	1SNK140142R0000	MC512PA	200
1SNA168700R2200	PR5	152	1SNB041741R0612	MG-CPM 13 41741	202	1SNK140151R0000	MC512PA	198
1SNA173220R0500	PR30	150	1SNB041790R0512	MG-CPM-13 41790	196	1SNK140152R0000	MC512PA	200
1SNA173523R1100	PC81-10	119	1SNB041791R0612	MG-CPM-13 41791	202	1SNK140161R0000	MC512PA	198
1SNA174300R1700	PR3.Z2	150	1SNB043196R0012	MG-CPMFA 43196	147	1SNK140162R0000	MC512PA	200
1SNA178529R0400	PR50	151	1SNB419001R0000	MG3 KIT	202	1SNK140171R0000	MC512PA	198
1SNA179726R0200	AJS9	182	1SNB991000R0000	MG2-PWC 991000	216	1SNK140172R0000	MC512PA	200
1SNA206680R1500	AJS9-BK	182	1SNB991002R0000	MG2-PLT 991002	216	1SNK140181R0000	MC512PA	198
1SNA206681R0200	AJS9-GN	182	1SNB991004R0000	MG2-WTB 991004	216	1SNK140182R0000	MC512PA	200
1SNA206682R0300	AJS9-GR	182	1SNB991005R0000	MG2-STB 991005	216	1SNK140191R0000	MC512PA	198
1SNA206683R0400	AJS9-BL	182	1SNB991006R0000	MG2-CTB 991006	216	1SNK140192R0000	MC512PA	200
1SNA206720R1400	AJS9-RD	182	1SNB991007R0000	MG2-PTD 991007	216	1SNK140201R0000	MC512PA	198
1SNA206721R0100	AL4-M3	126	1SNB991008R0000	MG2-MTB 991008	216	1SNK140202R0000	MC512PA	200
1SNA206765R0000	AJS9-WH	182	1SNB991010R0000	MG2-PTM 991010	213	1SNK145011R0000	MC512PA	198
1SNA235700R1500	HTP500-V2 KIT	215	1SNB991011R0000	MG2-QTB 991011	216	1SNK145012R0000	MC512PA	200
1SNA235703R0400	HTP500-FEED	215	1SNB991012R0000	MG2-ABM 991012	216	1SNK145021R0000	MC512PA	198
1SNA235704R0500	HTP500-PL	215	1SNB991013R0000	MG2-LTB 991013	216	1SNK145022R0000	MC512PA	200
1SNA235705R0600	HTP500-PL2	215	1SNB991016R0000	MG2-ETB 991016	202	1SNK145031R0000	MC512PA	198
1SNA360000R2400	KIT MAO AMS 500	214	1SNB991502R0000	MG2-TWC 991502	216	1SNK145032R0000	MC512PA	200
1SNA360000R2500	AMS 250 BASIC KIT	217	1SNB991512R0000	MG2-TTB 991512	216	1SNK145041R0000	MC512PA	198
1SNA360010R1500	SPRC 1	218	1SNB991513R0000	MG2-TMT 991513	216	1SNK145042R0000	MC512PA	200
1SNA360011R1500	SPRC 2	218	1SNB991522R0000	MG2-TLT 991522	216	1SNK145051R0000	MC512PA	198
1SNA360014R0500	SPRC 4	218	1SNB991532R0000	MG2-TGT 991532	216	1SNK145052R0000	MC512PA	200
1SNA360015R0600	SPRC 5	218	1SNB991542R0000	MG2-TWT 991542	216	1SNK145061R0000	MC512PA	198
1SNA360016R0700	SPRC 6	218	1SNB991552R0000	MG2-TST 991552	216	1SNK145062R0000	MC512PA	200
1SNA360017R0000	SPRC 7	218	1SNB991562R0000	MG2-TCT 991562	216	1SNK145071R0000	MC512PA	198
1SNA360018R1100	SPRC 8	218	1SNB991563R0000	MG2-TTD 991563	216	1SNK145072R0000	MC512PA	200
1SNA360019R1200	SPRC 9	218	1SNK140000R0000	MC512	196	1SNK145081R0000	MC512PA	198
1SNA360020R1700	SPRC 10	218	1SNK140004R0000	MC512-YL	196	1SNK145082R0000	MC512PA	200
1SNA360021R0400	SPRC 11	218	1SNK140011R0000	MC512PA	198	1SNK145091R0000	MC512PA	198
1SNA360023R0600	SPRC 13	218	1SNK140012R0000	MC512PA	200	1SNK145092R0000	MC512PA	200
1SNA360024R0700	SPRC 14	218	1SNK140021R0000	MC512PA	198	1SNK145102R0000	MC512PA	200
1SNA360025R0000	SPRC 15	218	1SNK140022R0000	MC512PA	200	1SNK146011R0000	MC512PA	198
1SNA360026R0100	SPRC 16	218	1SNK140031R0000	MC512PA	198	1SNK146012R0000	MC512PA	200
1SNA360031R0600	SPRC 21	214	1SNK140032R0000	MC512PA	200	1SNK146021R0000	MC512PA	198
1SNA360036R0300	SPRC 26	218	1SNK140041R0000	MC512PA	198	1SNK146022R0000	MC512PA	200
1SNA360037R0400	SPRC 27	218	1SNK140042R0000	MC512PA	200	1SNK146031R0000	MC512PA	198
1SNA360038R1500	SPRC 29	218	1SNK140051R0000	MC512PA	198	1SNK146032R0000	MC512PA	200
1SNA360039R1700	SPRC 30-3	208	1SNK140052R0000	MC512PA	200	1SNK146041R0000	MC512PA	198
1SNA360040R2300	SPRC 28	218	1SNK140061R0000	MC512PA	198	1SNK146042R0000	MC512PA	200
1SNA400711R0600	PC8-R1	176	1SNK140062R0000	MC512PA	200	1SNK146051R0000	MC512PA	198
1SNA400712R0700	PC8-R2	176	1SNK140071R0000	MC512PA	198	1SNK146052R0000	MC512PA	200
1SNA400713R0000	PC8-R3	176	1SNK140072R0000	MC512PA	200	1SNK146061R0000	MC512PA	198
1SNA400724R0300	PC8-R4	176	1SNK140081R0000	MC512PA	198	1SNK146062R0000	MC512PA	200
1SNA400842R0000	PC8-R5	176	1SNK140082R0000	MC512PA	200	1SNK146071R0000	MC512PA	198
1SNA400843R0000	PC8-R6	176	1SNK140083R0000	MC512PA	198	1SNK146072R0000	MC512PA	200
1SNB040340R0412	MG2-TDMO-01 40340	213	1SNK140084R0000	MC512PA	200	1SNK146081R0000	MC512PA	198
1SNB040341R0416	MG2-TDMO-01 40341	213	1SNK140091R0000	MC512PA	198	1SNK146082R0000	MC512PA	200

Index

Order code classification

Order code	Type	Page	Order code	Type	Page	Order code	Type	Page
1SNK166031R0000	MC812PA	209	1SNK167051R0000	MC812PA	210	1SNK505060R0000	ZS4-YL	56
1SNK166032R0000	MC812PA	211	1SNK167052R0000	MC812PA	212	1SNK505061R0000	ZS4-GN	56
1SNK166041R0000	MC812PA	209	1SNK167061R0000	MC812PA	210	1SNK505062R0000	ZS4-RD	56
1SNK166042R0000	MC812PA	211	1SNK167062R0000	MC812PA	212	1SNK505063R0000	ZS4-PR	56
1SNK166051R0000	MC812PA	209	1SNK167071R0000	MC812PA	210	1SNK505064R0000	ZS4-BR	56
1SNK166052R0000	MC812PA	211	1SNK167072R0000	MC812PA	212	1SNK505065R0000	ZS4-WH	56
1SNK166061R0000	MC812PA	209	1SNK167081R0000	MC812PA	210	1SNK505066R0000	ZS4-BK	56
1SNK166062R0000	MC812PA	211	1SNK167082R0000	MC812PA	212	1SNK505150R0000	ZS4-PE	67
1SNK166071R0000	MC812PA	209	1SNK167091R0000	MC812PA	210	1SNK505210R0000	ZS4-D2	110
1SNK166072R0000	MC812PA	211	1SNK167092R0000	MC812PA	212	1SNK505211R0000	ZS4-D1	111
1SNK166081R0000	MC812PA	209	1SNK168001R0000	MC812PA	210	1SNK505212R0000	ZS4-T3	120
1SNK166082R0000	MC812PA	211	1SNK168002R0000	MC812PA	212	1SNK505220R0000	ZS4-D2-BL	110
1SNK166091R0000	MC812PA	209	1SNK168011R0000	MC812PA	210	1SNK505230R0000	ZS4-D2-OR	110
1SNK166092R0000	MC812PA	211	1SNK168012R0000	MC812PA	212	1SNK505310R0000	ZS4-S	79
1SNK166101R0000	MC812PA	209	1SNK168021R0000	MC812PA	210	1SNK505311R0000	ZS4-S-T2	80
1SNK166102R0000	MC812PA	211	1SNK168022R0000	MC812PA	212	1SNK505312R0000	ZS4-S-T2.3	80
1SNK166111R0000	MC812PA	209	1SNK168031R0000	MC812PA	210	1SNK505313R0000	ZS4-SP	86
1SNK166112R0000	MC812PA	211	1SNK168032R0000	MC812PA	212	1SNK505314R0000	ZS4-SP-T2	87
1SNK166121R0000	MC812PA	209	1SNK168041R0000	MC812PA	210	1SNK505315R0000	ZS4-D2-S	116
1SNK166122R0000	MC812PA	211	1SNK168042R0000	MC812PA	212	1SNK505316R0000	ZS4-D2-S-T2	117
1SNK166131R0000	MC812PA	209	1SNK168051R0000	MC812PA	210	1SNK505320R0000	ZS4-S-BL	79
1SNK166132R0000	MC812PA	211	1SNK168052R0000	MC812PA	212	1SNK505321R0000	ZS4-S-T2-BL	80
1SNK166141R0000	MC812PA	209	1SNK168061R0000	MC812PA	210	1SNK505330R0000	ZS4-S-OR	79
1SNK166142R0000	MC812PA	211	1SNK168062R0000	MC812PA	212	1SNK505331R0000	ZS4-S-T2-OR	80
1SNK166151R0000	MC812PA	209	1SNK168071R0000	MC812PA	210	1SNK505910R0000	ES4	171
1SNK166152R0000	MC812PA	211	1SNK168072R0000	MC812PA	212	1SNK505911R0000	ES6-4S	171
1SNK166161R0000	MC812PA	209	1SNK168091R0000	MC812PA	210	1SNK505912R0000	ES6-3S	171
1SNK166162R0000	MC812PA	211	1SNK168092R0000	MC812PA	212	1SNK505960R0000	ES4-D2	171
1SNK166171R0000	MC812PA	209	1SNK168101R0000	MC812PA	210	1SNK505961R0000	ES4-T3	172
1SNK166172R0000	MC812PA	211	1SNK168102R0000	MC812PA	212	1SNK506010R0000	ZS6	57
1SNK166181R0000	MC812PA	209	1SNK168111R0000	MC812PA	210	1SNK506011R0000	ZS6-3S	58
1SNK166182R0000	MC812PA	211	1SNK168112R0000	MC812PA	212	1SNK506012R0000	ZS6-4S	59
1SNK166191R0000	MC812PA	209	1SNK168121R0000	MC812PA	210	1SNK506013R0000	ZS4-R2	104
1SNK166192R0000	MC812PA	211	1SNK168122R0000	MC812PA	212	1SNK506020R0000	ZS6-BL	57
1SNK166201R0000	MC812PA	209	1SNK168131R0000	MC812PA	210	1SNK506021R0000	ZS6-3S-BL	58
1SNK166202R0000	MC812PA	211	1SNK168132R0000	MC812PA	212	1SNK506022R0000	ZS6-4S-BL	59
1SNK166211R0000	MC812PA	209	1SNK168141R0000	MC812PA	210	1SNK506030R0000	ZS6-OR	57
1SNK166212R0000	MC812PA	211	1SNK168142R0000	MC812PA	212	1SNK506060R0000	ZS6-YL	57
1SNK166221R0000	MC812PA	209	1SNK168151R0000	MC812PA	210	1SNK506061R0000	ZS6-GN	57
1SNK166222R0000	MC812PA	211	1SNK168152R0000	MC812PA	212	1SNK506062R0000	ZS6-RD	57
1SNK166231R0000	MC812PA	210	1SNK168161R0000	MC812PA	210	1SNK506063R0000	ZS6-PR	57
1SNK166232R0000	MC812PA	212	1SNK168162R0000	MC812PA	212	1SNK506064R0000	ZS6-BR	57
1SNK166241R0000	MC812PA	210	1SNK168171R0000	MC812PA	210	1SNK506065R0000	ZS6-WH	57
1SNK166242R0000	MC812PA	212	1SNK168172R0000	MC812PA	212	1SNK506066R0000	ZS6-BK	57
1SNK166251R0000	MC812PA	210	1SNK168181R0000	MC812PA	210	1SNK506067R0000	ZS6-3S-YL	58
1SNK166252R0000	MC812PA	212	1SNK168182R0000	MC812PA	212	1SNK506068R0000	ZS6-4S-YL	59
1SNK166261R0000	MC812PA	210	1SNK168192R0000	MC812PA	212	1SNK506150R0000	ZS6-PE	68
1SNK166262R0000	MC812PA	212	1SNK168202R0000	MC812PA	212	1SNK506151R0000	ZS6-3S-PE	69
1SNK167001R0000	MC812PA	210	1SNK168212R0000	MC812PA	212	1SNK506152R0000	ZS6-4S-PE	70
1SNK167002R0000	MC812PA	212	1SNK168222R0000	MC812PA	212	1SNK506153R0000	ZS4-PE-R2	105
1SNK167011R0000	MC812PA	210	1SNK169001R0000	MC812PA	210	1SNK506210R0000	ZS6-D2	114
1SNK167012R0000	MC812PA	212	1SNK169002R0000	MC812PA	212	1SNK506211R0000	ZS6-D1	113
1SNK167021R0000	MC812PA	210	1SNK169011R0000	MC812PA	210	1SNK506212R0000	ZS6-D2-PE	114
1SNK167022R0000	MC812PA	212	1SNK169012R0000	MC812PA	212	1SNK506213R0000	ZS4-T3-R1	121
1SNK167031R0000	MC812PA	210	1SNK169999R0000	MC812PA	208	1SNK506214R0000	ZS6-D1-RD	113
1SNK167032R0000	MC812PA	212	1SNK505010R0000	ZS4	56	1SNK506220R0000	ZS6-D2-BL	112
1SNK167041R0000	MC812PA	210	1SNK505020R0000	ZS4-BL	56	1SNK506230R0000	ZS6-D2-OR	112
1SNK167042R0000	MC812PA	212	1SNK505030R0000	ZS4-OR	56	1SNK506250R0000	ZS6-D1-PE	115

Index

Order code classification

Order code	Type	Page	Order code	Type	Page	Order code	Type	Page
1SNK506260R0000	ZS6-D2-YL	112	1SNK508910R0000	ES10-ST	172	1SNK705220R0000	ZK2.5-D2-BL	44
1SNK506262R0000	ZS6-D2-RD	112	1SNK508911R0000	ES4-D2-SF1	172	1SNK705250R0000	ZK2.5-D1-PE	47
1SNK506265R0000	ZS6-D2-WH	112	1SNK508960R0000	ES4-SF	172	1SNK705310R0000	ZK2.5-S	39
1SNK506266R0000	ZS6-D2-BK	112	1SNK510010R0000	ZS16	61	1SNK705311R0000	ZK2.5-SP	41
1SNK506310R0000	ZS4-S-R1	105	1SNK510020R0000	ZS16-BL	61	1SNK705320R0000	ZK2.5-S-BL	39
1SNK506311R0000	ZS4-S-T2-R1	82	1SNK510030R0000	ZS16-OR	61	1SNK705330R0000	ZK2.5-S-OR	39
1SNK506312R0000	ZS4-S-T2.3-R1	82	1SNK510150R0000	ZS16-PE	72	1SNK705910R0000	EK2.5	167
1SNK506313R0000	ZS4-SP-R1	88	1SNK512010R0000	ZS25	62	1SNK705911R0000	EK2.5-3P	167
1SNK506314R0000	ZS4-SP-T2-R1	89	1SNK512020R0000	ZS25-BL	62	1SNK705912R0000	EK2.5-4P	167
1SNK506315R0000	ZS6-S	83	1SNK512060R0000	ZS25-YL	62	1SNK705960R0000	EK2.5-D2	168
1SNK506316R0000	ZS6-S-4S-T2	84	1SNK512150R0000	ZS25-PE	73	1SNK706010R0000	ZK4	22
1SNK506320R0000	ZS4-S-R1-BL	81	1SNK516010R0000	ZS35	63	1SNK706011R0000	ZK4-3P	40
1SNK506321R0000	ZS4-S-T2-R1-BL	82	1SNK516011R0000	ZS50	64	1SNK706012R0000	ZK4-4P	24
1SNK506322R0000	ZS6-S-BL	83	1SNK516020R0000	ZS35-BL	63	1SNK706020R0000	ZK4-BL	22
1SNK506330R0000	ZS4-S-R1-OR	81	1SNK516021R0000	ZS50-BL	64	1SNK706021R0000	ZK4-3P-BL	23
1SNK506331R0000	ZS4-S-T2-R1-OR	82	1SNK516030R0000	ZS35-OR	63	1SNK706022R0000	ZK4-4P-BL	24
1SNK506410R0000	ZS4-SF	106	1SNK516060R0000	ZS50-YL	64	1SNK706030R0000	ZK4-OR	22
1SNK506411R0000	ZS4-SF-T2	101	1SNK516150R0000	ZS35-PE	74	1SNK706031R0000	ZK4-3P-OR	23
1SNK506412R0000	ZS4-SF-R1	102	1SNK516151R0000	ZS50-PE	76	1SNK706032R0000	ZK4-4P-OR	24
1SNK506413R0000	ZS4-SF-R2	103	1SNK516170R0000	ZS35-PEN	75	1SNK706150R0000	ZK4-PE	32
1SNK506414R0000	ZS4-S-R2	106	1SNK522010R0000	ZS70	65	1SNK706151R0000	ZK4-PE-3P	33
1SNK506415R0000	ZS4-SF-R3	102	1SNK522020R0000	ZS70-BL	65	1SNK706152R0000	ZK4-PE-4P	34
1SNK506416R0000	ZS4-SF-R4	103	1SNK522060R0000	ZS70-YL	65	1SNK706310R0000	ZK2.5-S-R1	40
1SNK508010R0000	ZS10	60	1SNK522150R0000	ZS70-PE	77	1SNK706410R0000	ZK2.5-SF	42
1SNK508011R0000	ZS10-R1	129	1SNK526010R0000	ZS95	66	1SNK706411R0000	ZK2.5-SF-R1	43
1SNK508013R0000	ZS4-R1	98	1SNK526020R0000	ZS95-BL	66	1SNK706412R0000	ZK2.5-SF-R3	43
1SNK508020R0000	ZS10-BL	60	1SNK526060R0000	ZS95-YL	66	1SNK708010R0000	ZK6	25
1SNK508030R0000	ZS10-OR	60	1SNK526150R0000	ZS95-PE	78	1SNK708011R0000	ZK6-3P	26
1SNK508060R0000	ZS10-YL	60	1SNK705010R0000	ZK2.5	19	1SNK708020R0000	ZK6-BL	25
1SNK508061R0000	ZS10-GN	60	1SNK705011R0000	ZK2.5-3P	20	1SNK708021R0000	ZK6-3P-BL	26
1SNK508062R0000	ZS10-RD	60	1SNK705012R0000	ZK2.5-4P	21	1SNK708030R0000	ZK6-OR	25
1SNK508063R0000	ZS10-PR	60	1SNK705020R0000	ZK2.5-BL	19	1SNK708031R0000	ZK6-3P-OR	26
1SNK508064R0000	ZS10-BR	60	1SNK705021R0000	ZK2.5-3P-BL	20	1SNK708150R0000	ZK6-PE	35
1SNK508065R0000	ZS10-WH	60	1SNK705022R0000	ZK2.5-4P-BL	21	1SNK708151R0000	ZK6-PE-3P	36
1SNK508066R0000	ZS10-BK	60	1SNK705030R0000	ZK2.5-OR	19	1SNK708911R0000	EK6-3P	168
1SNK508150R0000	ZS10-PE	71	1SNK705031R0000	ZK2.5-3P-OR	20	1SNK710010R0000	ZK10	27
1SNK508151R0000	ZS10-PE-R1	130	1SNK705032R0000	ZK2.5-4P-OR	21	1SNK710020R0000	ZK10-BL	27
1SNK508310R0000	ZS10-ST	126	1SNK705060R0000	ZK2.5-YL	19	1SNK710030R0000	ZK10-OR	27
1SNK508311R0000	ZS10-ST-T4	128	1SNK705061R0000	ZK2.5-GN	19	1SNK710150R0000	ZK10-PE	37
1SNK508312R0000	ZS10-ST-1	127	1SNK705062R0000	ZK2.5-RD	19	1SNK710910R0000	EK10	168
1SNK508315R0000	ZS10-S	85	1SNK705065R0000	ZK2.5-WH	19	1SNK712010R0000	ZK16	28
1SNK508316R0000	ZS10-SP	90	1SNK705066R0000	ZK2.5-BK	19	1SNK712020R0000	ZK16-BL	28
1SNK508320R0000	ZS10-S-BL	85	1SNK705067R0000	ZK2.5-3P-YL	20	1SNK712150R0000	ZK16-PE	38
1SNK508410R0000	ZS4-SF1	99	1SNK705068R0000	ZK2.5-3P-GN	20	1SNK805010R0000	ZDK2.5-22	140
1SNK508411R0000	ZS4-SF1-T2	95	1SNK705069R0000	ZK2.5-3P-RD	20	1SNK805013R0000	ZDS4-22	144
1SNK508412R0000	ZS4-SF1-R1	96	1SNK705072R0000	ZK2.5-3P-WH	20	1SNK805712R0000	CDK2.5	141
1SNK508413R0000	ZS4-SF1-R2	97	1SNK705073R0000	ZK2.5-3P-BK	20	1SNK805713R0000	CDK2.5-E	141
1SNK508414R0000	ZS4-SF1-R3	96	1SNK705074R0000	ZK2.5-4P-YL	21	1SNK805714R0000	CDS4	145
1SNK508415R0000	ZS4-SF1-R4	97	1SNK705075R0000	ZK2.5-4P-GN	21	1SNK805715R0000	CDS4-E	147
1SNK508416R0000	ZS4-S-R3	99	1SNK705076R0000	ZK2.5-4P-RD	21	1SNK805910R0000	EDK2.5-22	183
1SNK508417R0000	ZS10-S-R2	109	1SNK705079R0000	ZK2.5-4P-WH	21	1SNK805911R0000	EDS4-22	183
1SNK508418R0000	ZS10-SF	109	1SNK705080R0000	ZK2.5-4P-BK	21	1SNK806010R0000	ZDK4-22	142
1SNK508421R0000	ZS10-SF-R1	108	1SNK705150R0000	ZK2.5-PE	29	1SNK806013R0000	ZDS4-22-R1	146
1SNK508422R0000	ZS10-SF-R3	108	1SNK705151R0000	ZK2.5-PE-3P	30	1SNK806712R0000	CDK4	143
1SNK508423R0000	ZS4-D2-SF1-R1	119	1SNK705152R0000	ZK2.5-PE-4P	31	1SNK806713R0000	CDK4-E	143
1SNK508424R0000	ZS4-D2-SF1-R3	119	1SNK705210R0000	ZK2.5-D2	46	1SNK806714R0000	CDS4-R1	147
1SNK508425R0000	ZS4-D2-SF1	118	1SNK705211R0000	ZK2.5-D1	45	1SNK900001R0000	BAM3	153
1SNK508430R0000	ZS4-SF1-OR	94	1SNK705212R0000	ZK2.5-D2-PE	46	1SNK900002R0000	BAZ1	154

Index

Order code classification

Order code	Type	Page	Order code	Type	Page
1SNK900101R0000	CS	177	1SNK906310R0000	JB6-10	157
1SNK900102R0000	BAZH1	153	1SNK906350R0000	JB6-50	157
1SNK900103R0000	CS-R1	177	1SNK908302R0000	JB8-2	158
1SNK900104R0000	ES-TC8	163	1SNK908303R0000	JB8-3	158
1SNK900105R0000	ES-TC6	163	1SNK908304R0000	JB8-4	158
1SNK900106R0000	CS-R2	169	1SNK908305R0000	JB8-5	158
1SNK900107R0000	CS-R3	169	1SNK908310R0000	JB8-10	158
1SNK900200R0000	TC5	163	1SNK908902R0000	JB8-2-R1	173
1SNK900201R0000	TC5-R1	163	1SNK908903R0000	JB8-3-R1	173
1SNK900203R0000	TP2	162	1SNK908904R0000	JB8-4-R1	173
1SNK900205R0000	TP4	162	1SNK908905R0000	JB8-5-R1	173
1SNK900401R0000	PG5	165	1SNK908910R0000	JB8-10-R1	173
1SNK900402R0000	PG5-R1	165	1SNK910302R0000	JB10-2	159
1SNK900403R0000	PG5-R2	164	1SNK910303R0000	JB10-3	159
1SNK900600R0000	SHBS	178	1SNK910304R0000	JB10-4	159
1SNK900601R0000	SHBP	170	1SNK910305R0000	JB10-5	159
1SNK900602R0000	SHB	178	1SNK910310R0000	JB10-10	159
1SNK900603R0000	JB85-3	161	1SNK912302R0000	JB12-2	160
1SNK900604R0000	CO	180	1SNK912303R0000	JB12-3	160
1SNK900605R0000	LH	155	1SNK912305R0000	JB12-5	160
1SNK900607R0000	LH-R1	155	1SNK916302R0000	JB16-2	174
1SNK900611R0000	UMH	213	1SNK916303R0000	JB16-3	174
1SNK900618R0000	PL5	179	1SNK916304R0000	JB16-4	174
1SNK900619R0000	PL6	179	1SNK916305R0000	JB16-5	174
1SNK900620R0000	PL8	179	1SNK916310R0000	JB16-10	174
1SNK900621R0000	PL10	179	1SNK922302R0000	JB22-2	174
1SNK900622R0000	PL16	179	1SNK922303R0000	JB22-3	174
1SNK900624R0000	KCO	180	1SNK922305R0000	JB22-5	174
1SNK900627R0000	RILS	178	1SNK922310R0000	JB22-10	174
1SNK900630R0000	MCLH	214	1SNK926302R0000	JB26-2	175
1SNK900631R0000	MCLH-R1	214	1SNK926303R0000	JB26-3	175
1SNK900633R0000	MCLH-YL	214	1SNK926305R0000	JB26-5	175
1SNK900634R0000	MCLH-R1-YL	214	1SNK926310R0000	JB26-10	175
1SNK900636R0000	COP-ZD	184			
1SNK900637R0000	VR-ZD	184			
1SNK900638R0000	VR-ZD-R1	184			
1SNK900640R0000	TO3.5-50	166			
1SNK900641R0000	TO4-100	166			
1SNK900642R0000	TO5.5-125	166			
1SNK900643R0000	TO6.5-150	166			
1SNK900644R0000	TO3.5-100-INS	166			
1SNK900650R0000	PS-3	166			
1SNK900652R0000	SC-JB8-2	181			
1SNK900653R0000	SC-JB8-3	181			
1SNK900654R0000	SC-JB8-4	181			
1SNK900655R0000	SC-JB8-5	181			
1SNK900657R0000	SC-JB8-3-OR	181			
1SNK900658R0000	SC-JB8-4-OR	181			
1SNK905302R0000	JB5-2	156			
1SNK905303R0000	JB5-3	156			
1SNK905304R0000	JB5-4	156			
1SNK905305R0000	JB5-5	156			
1SNK905310R0000	JB5-10	156			
1SNK905350R0000	JB5-50	156			
1SNK906302R0000	JB6-2	157			
1SNK906303R0000	JB6-3	157			
1SNK906304R0000	JB6-4	157			
1SNK906305R0000	JB6-5	157			

Index

Type classification

Type	Order code	Page
PC8-2	1SNA116538R1700	176
PC8-2	1SNA116538R1700	176
PC8-3	1SNA116539R1000	176
PC8-4	1SNA116540R2500	176
PC8-10	1SNA163313R2400	176
PR3.G2	1SNA164800R0300	151
PR4	1SNA168500R1200	152
TGA8	1SNA168672R1100	99
TGA8	1SNA168673R1200	99
TGA8	1SNA168674R1300	99
ANT	1SNA168675R1400	99
PR5	1SNA168700R2200	152
PR30	1SNA173220R0500	150
PC81-10	1SNA173523R1100	119
PR3.Z2	1SNA174300R1700	150
PR50	1SNA178529R0400	151
AJS9	1SNA179726R0200	182
AJS9-BK	1SNA206680R1500	182
AJS9-GN	1SNA206681R0200	182
AJS9-GR	1SNA206682R0300	182
AJS9-BL	1SNA206683R0400	182
AJS9-RD	1SNA206720R1400	182
AL4-M3	1SNA206721R0100	126
AJS9-WH	1SNA206765R0000	182
HTP500-V2 KIT	1SNA235700R1500	215
HTP500-FEED	1SNA235703R0400	215
HTP500-PL	1SNA235704R0500	215
HTP500-PL2	1SNA235705R0600	215
KIT MAO AMS 500	1SNA360000R2400	214
AMS 250 BASIC KIT	1SNA360000R2500	217
SPRC 1	1SNA360010R1500	218
SPRC 2	1SNA360011R1500	218
SPRC 4	1SNA360014R0500	218
SPRC 5	1SNA360015R0600	218
SPRC 6	1SNA360016R0700	218
SPRC 7	1SNA360017R0000	218
SPRC 8	1SNA360018R1100	218
SPRC 9	1SNA360019R1200	218
SPRC 10	1SNA360020R1700	218
SPRC 11	1SNA360021R0400	218
SPRC 13	1SNA360023R0600	218
SPRC 14	1SNA360024R0700	218
SPRC 15	1SNA360025R0000	218
SPRC 16	1SNA360026R0100	218
SPRC 21	1SNA360031R0600	214
SPRC 26	1SNA360036R0300	218
SPRC 27	1SNA360037R0400	218
SPRC 29	1SNA360038R1500	218
SPRC 30-3	1SNA360039R1700	208
SPRC 28	1SNA360040R2300	218
PC8-R1	1SNA400711R0600	176
PC8-R2	1SNA400712R0700	176
PC8-R3	1SNA400713R0000	176
PC8-R4	1SNA400724R0300	176
PC8-R5	1SNA400842R0000	176
PC8-R6	1SNA400843R0000	176
MG2-TDMO-01 40340	1SNB040340R0412	213
MG2-TDMO-01 40341	1SNB040341R0416	213

Type	Order code	Page
MG2-TDMO-01 40390	1SNB040390R0412	213
MG2-TDMO-01 40391	1SNB040391R0416	213
MG2-TDMO-02 40440	1SNB040440R0412	213
MG2-TDMO-02 40441	1SNB040441R0416	213
MG2-TDMO-02 40490	1SNB040490R0412	213
MG2-TDMO-02 40491	1SNB040491R0416	213
MG2-TDMO-03 40540	1SNB040540R0412	213
MG2-TDMO-03 40541	1SNB040541R0416	213
MG2-TDMO-03 40590	1SNB040590R0412	213
MG2-TDMO-03 40591	1SNB040591R0416	213
MG-CPM 13 41740	1SNB041740R0512	196
MG-CPM 13 41741	1SNB041741R0612	202
MG-CPM-13 41790	1SNB041790R0512	196
MG-CPM-13 41791	1SNB041791R0612	202
MG-CPMFA 43196	1SNB043196R0012	147
MG3 KIT	1SNB419001R0000	202
MG2-PWC 991000	1SNB991000R0000	216
MG2-PLT 991002	1SNB991002R0000	216
MG2-WTB 991004	1SNB991004R0000	216
MG2-STB 991005	1SNB991005R0000	216
MG2-CTB 991006	1SNB991006R0000	216
MG2-PTD 991007	1SNB991007R0000	216
MG2-MTB 991008	1SNB991008R0000	216
MG2-PTM 991010	1SNB991010R0000	213
MG2-QTB 991011	1SNB991011R0000	216
MG2-ABM 991012	1SNB991012R0000	216
MG2-LTB 991013	1SNB991013R0000	216
MG2-ETB 991016	1SNB991016R0000	202
MG2-TWC 991502	1SNB991502R0000	216
MG2-TTB 991512	1SNB991512R0000	216
MG2-TMT 991513	1SNB991513R0000	216
MG2-TLT 991522	1SNB991522R0000	216
MG2-TGT 991532	1SNB991532R0000	216
MG2-TWT 991542	1SNB991542R0000	216
MG2-TST 991552	1SNB991552R0000	216
MG2-TCT 991562	1SNB991562R0000	216
MG2-TTD 991563	1SNB991563R0000	216
MC512	1SNK140000R0000	196
MC512-YL	1SNK140004R0000	196
MC512PA	1SNK140011R0000	198
MC512PA	1SNK140012R0000	200
MC512PA	1SNK140021R0000	198
MC512PA	1SNK140022R0000	200
MC512PA	1SNK140031R0000	198
MC512PA	1SNK140032R0000	200
MC512PA	1SNK140041R0000	198
MC512PA	1SNK140042R0000	200
MC512PA	1SNK140051R0000	198
MC512PA	1SNK140052R0000	200
MC512PA	1SNK140061R0000	198
MC512PA	1SNK140062R0000	200
MC512PA	1SNK140071R0000	198
MC512PA	1SNK140072R0000	200
MC512PA	1SNK140081R0000	198
MC512PA	1SNK140082R0000	200
MC512PA	1SNK140083R0000	198
MC512PA	1SNK140084R0000	200
MC512PA	1SNK140091R0000	198

Type	Order code	Page
MC512PA	1SNK140092R0000	200
MC512PA	1SNK140101R0000	198
MC512PA	1SNK140102R0000	200
MC512PA	1SNK140111R0000	198
MC512PA	1SNK140112R0000	200
MC512PA	1SNK140121R0000	198
MC512PA	1SNK140122R0000	200
MC512PA	1SNK140131R0000	198
MC512PA	1SNK140132R0000	200
MC512PA	1SNK140141R0000	198
MC512PA	1SNK140142R0000	200
MC512PA	1SNK140151R0000	198
MC512PA	1SNK140152R0000	200
MC512PA	1SNK140161R0000	198
MC512PA	1SNK140162R0000	200
MC512PA	1SNK140171R0000	198
MC512PA	1SNK140172R0000	200
MC512PA	1SNK140181R0000	198
MC512PA	1SNK140182R0000	200
MC512PA	1SNK140191R0000	198
MC512PA	1SNK140192R0000	200
MC512PA	1SNK140201R0000	198
MC512PA	1SNK140202R0000	200
MC512PA	1SNK145011R0000	198
MC512PA	1SNK145012R0000	200
MC512PA	1SNK145021R0000	198
MC512PA	1SNK145022R0000	200
MC512PA	1SNK145031R0000	198
MC512PA	1SNK145032R0000	200
MC512PA	1SNK145041R0000	198
MC512PA	1SNK145042R0000	200
MC512PA	1SNK145051R0000	198
MC512PA	1SNK145052R0000	200
MC512PA	1SNK145061R0000	198
MC512PA	1SNK145062R0000	200
MC512PA	1SNK145071R0000	198
MC512PA	1SNK145072R0000	200
MC512PA	1SNK145081R0000	198
MC512PA	1SNK145082R0000	200
MC512PA	1SNK145091R0000	198
MC512PA	1SNK145092R0000	200
MC512PA	1SNK145102R0000	200
MC512PA	1SNK146011R0000	198
MC512PA	1SNK146012R0000	200
MC512PA	1SNK146021R0000	198
MC512PA	1SNK146022R0000	200
MC512PA	1SNK146031R0000	198
MC512PA	1SNK146032R0000	200
MC512PA	1SNK146041R0000	198
MC512PA	1SNK146042R0000	200
MC512PA	1SNK146051R0000	198
MC512PA	1SNK146052R0000	200
MC512PA	1SNK146061R0000	198
MC512PA	1SNK146062R0000	200
MC512PA	1SNK146071R0000	198
MC512PA	1SNK146072R0000	200
MC512PA	1SNK146081R0000	198
MC512PA	1SNK146082R0000	200

Index

Type classification

Type	Order code	Page	Type	Order code	Page	Type	Order code	Page
MC512PA	1SNK146091R0000	198	MC512PA	1SNK148011R0000	199	MC612PA	1SNK150072R0000	206
MC512PA	1SNK146092R0000	200	MC512PA	1SNK148012R0000	201	MC612PA	1SNK150081R0000	204
MC512PA	1SNK146101R0000	198	MC512PA	1SNK148021R0000	199	MC612PA	1SNK150082R0000	206
MC512PA	1SNK146102R0000	200	MC512PA	1SNK148022R0000	201	MC612PA	1SNK150083R0000	204
MC512PA	1SNK146111R0000	198	MC512PA	1SNK148031R0000	199	MC612PA	1SNK150084R0000	206
MC512PA	1SNK146112R0000	200	MC512PA	1SNK148032R0000	201	MC612PA	1SNK150091R0000	204
MC512PA	1SNK146121R0000	198	MC512PA	1SNK148041R0000	199	MC612PA	1SNK150092R0000	206
MC512PA	1SNK146122R0000	200	MC512PA	1SNK148042R0000	201	MC612PA	1SNK150101R0000	204
MC512PA	1SNK146131R0000	198	MC512PA	1SNK148051R0000	199	MC612PA	1SNK150102R0000	206
MC512PA	1SNK146132R0000	200	MC512PA	1SNK148052R0000	201	MC612PA	1SNK150111R0000	204
MC512PA	1SNK146141R0000	198	MC512PA	1SNK148061R0000	199	MC612PA	1SNK150112R0000	206
MC512PA	1SNK146142R0000	200	MC512PA	1SNK148062R0000	201	MC612PA	1SNK150121R0000	204
MC512PA	1SNK146151R0000	198	MC512PA	1SNK148071R0000	199	MC612PA	1SNK150122R0000	206
MC512PA	1SNK146152R0000	200	MC512PA	1SNK148072R0000	201	MC612PA	1SNK150131R0000	204
MC512PA	1SNK146161R0000	198	MC512PA	1SNK148091R0000	199	MC612PA	1SNK150132R0000	206
MC512PA	1SNK146162R0000	200	MC512PA	1SNK148092R0000	201	MC612PA	1SNK150141R0000	204
MC512PA	1SNK146171R0000	198	MC512PA	1SNK148101R0000	199	MC612PA	1SNK150142R0000	206
MC512PA	1SNK146172R0000	200	MC512PA	1SNK148102R0000	201	MC612PA	1SNK150151R0000	204
MC512PA	1SNK146181R0000	198	MC512PA	1SNK148111R0000	199	MC612PA	1SNK150152R0000	206
MC512PA	1SNK146182R0000	200	MC512PA	1SNK148112R0000	201	MC612PA	1SNK150161R0000	204
MC512PA	1SNK146191R0000	198	MC512PA	1SNK148121R0000	199	MC612PA	1SNK150162R0000	206
MC512PA	1SNK146192R0000	200	MC512PA	1SNK148122R0000	201	MC612PA	1SNK150171R0000	204
MC512PA	1SNK146201R0000	198	MC512PA	1SNK148131R0000	199	MC612PA	1SNK150172R0000	206
MC512PA	1SNK146202R0000	200	MC512PA	1SNK148132R0000	201	MC612PA	1SNK150181R0000	204
MC512PA	1SNK146211R0000	198	MC512PA	1SNK148141R0000	199	MC612PA	1SNK150182R0000	206
MC512PA	1SNK146212R0000	200	MC512PA	1SNK148142R0000	201	MC612PA	1SNK150191R0000	204
MC512PA	1SNK146221R0000	198	MC512PA	1SNK148151R0000	199	MC612PA	1SNK150192R0000	206
MC512PA	1SNK146222R0000	200	MC512PA	1SNK148152R0000	201	MC612PA	1SNK150201R0000	204
MC512PA	1SNK146231R0000	198	MC512PA	1SNK148161R0000	199	MC612PA	1SNK150202R0000	206
MC512PA	1SNK146232R0000	201	MC512PA	1SNK148162R0000	201	MC612PA	1SNK155011R0000	204
MC512PA	1SNK146241R0000	198	MC512PA	1SNK148171R0000	199	MC612PA	1SNK155012R0000	206
MC512PA	1SNK146242R0000	201	MC512PA	1SNK148172R0000	201	MC612PA	1SNK155021R0000	204
MC512PA	1SNK146251R0000	198	MC512PA	1SNK148181R0000	199	MC612PA	1SNK155022R0000	206
MC512PA	1SNK146252R0000	201	MC512PA	1SNK148182R0000	201	MC612PA	1SNK155031R0000	204
MC512PA	1SNK146261R0000	199	MC512PA	1SNK148192R0000	201	MC612PA	1SNK155032R0000	206
MC512PA	1SNK146262R0000	201	MC512PA	1SNK148202R0000	201	MC612PA	1SNK155041R0000	204
MC512PA	1SNK147001R0000	199	MC512PA	1SNK148212R0000	201	MC612PA	1SNK155042R0000	206
MC512PA	1SNK147002R0000	201	MC512PA	1SNK148222R0000	201	MC612PA	1SNK155051R0000	204
MC512PA	1SNK147011R0000	199	MC512PA	1SNK149001R0000	199	MC612PA	1SNK155052R0000	206
MC512PA	1SNK147012R0000	201	MC512PA	1SNK149002R0000	201	MC612PA	1SNK155061R0000	204
MC512PA	1SNK147021R0000	199	MC512PA	1SNK149011R0000	199	MC612PA	1SNK155062R0000	206
MC512PA	1SNK147022R0000	201	MC512PA	1SNK149012R0000	201	MC612PA	1SNK155071R0000	204
MC512PA	1SNK147031R0000	199	MC512PA	1SNK149999R0000	197	MC612PA	1SNK155072R0000	206
MC512PA	1SNK147032R0000	201	MC612	1SNK150000R0000	202	MC612PA	1SNK155081R0000	204
MC512PA	1SNK147041R0000	199	MC612-YL	1SNK150004R0000	202	MC612PA	1SNK155082R0000	206
MC512PA	1SNK147042R0000	201	MC612PA	1SNK150011R0000	204	MC612PA	1SNK155091R0000	204
MC512PA	1SNK147051R0000	199	MC612PA	1SNK150012R0000	206	MC612PA	1SNK155092R0000	206
MC512PA	1SNK147052R0000	201	MC612PA	1SNK150021R0000	204	MC612PA	1SNK155102R0000	206
MC512PA	1SNK147061R0000	199	MC612PA	1SNK150022R0000	206	MC612PA	1SNK156011R0000	204
MC512PA	1SNK147062R0000	201	MC612PA	1SNK150031R0000	204	MC612PA	1SNK156012R0000	206
MC512PA	1SNK147071R0000	199	MC612PA	1SNK150032R0000	206	MC612PA	1SNK156021R0000	204
MC512PA	1SNK147072R0000	201	MC612PA	1SNK150041R0000	204	MC612PA	1SNK156022R0000	206
MC512PA	1SNK147081R0000	199	MC612PA	1SNK150042R0000	206	MC612PA	1SNK156031R0000	204
MC512PA	1SNK147082R0000	201	MC612PA	1SNK150051R0000	204	MC612PA	1SNK156032R0000	206
MC512PA	1SNK147091R0000	199	MC612PA	1SNK150052R0000	206	MC612PA	1SNK156041R0000	204
MC512PA	1SNK147092R0000	201	MC612PA	1SNK150061R0000	204	MC612PA	1SNK156042R0000	206
MC512PA	1SNK148001R0000	199	MC612PA	1SNK150062R0000	206	MC612PA	1SNK156051R0000	204
MC512PA	1SNK148002R0000	201	MC612PA	1SNK150071R0000	204	MC612PA	1SNK156052R0000	206

Index

Type classification

Type	Order code	Page	Type	Order code	Page	Type	Order code	Page
MC612PA	1SNK156061R0000	204	MC612PA	1SNK157081R0000	205	MC812PA	1SNK160042R0000	211
MC612PA	1SNK156062R0000	206	MC612PA	1SNK157082R0000	207	MC812PA	1SNK160051R0000	209
MC612PA	1SNK156071R0000	204	MC612PA	1SNK157091R0000	205	MC812PA	1SNK160052R0000	211
MC612PA	1SNK156072R0000	206	MC612PA	1SNK157092R0000	207	MC812PA	1SNK160061R0000	209
MC612PA	1SNK156081R0000	204	MC612PA	1SNK158001R0000	205	MC812PA	1SNK160062R0000	211
MC612PA	1SNK156082R0000	206	MC612PA	1SNK158002R0000	207	MC812PA	1SNK160071R0000	209
MC612PA	1SNK156091R0000	204	MC612PA	1SNK158011R0000	205	MC812PA	1SNK160072R0000	211
MC612PA	1SNK156092R0000	206	MC612PA	1SNK158012R0000	207	MC812PA	1SNK160081R0000	209
MC612PA	1SNK156101R0000	204	MC612PA	1SNK158021R0000	205	MC812PA	1SNK160082R0000	211
MC612PA	1SNK156102R0000	206	MC612PA	1SNK158022R0000	207	MC812PA	1SNK160083R0000	209
MC612PA	1SNK156111R0000	204	MC612PA	1SNK158031R0000	205	MC812PA	1SNK160084R0000	211
MC612PA	1SNK156112R0000	206	MC612PA	1SNK158032R0000	207	MC812PA	1SNK160091R0000	209
MC612PA	1SNK156121R0000	204	MC612PA	1SNK158041R0000	205	MC812PA	1SNK160092R0000	211
MC612PA	1SNK156122R0000	206	MC612PA	1SNK158042R0000	207	MC812PA	1SNK160101R0000	209
MC612PA	1SNK156131R0000	204	MC612PA	1SNK158051R0000	205	MC812PA	1SNK160102R0000	211
MC612PA	1SNK156132R0000	206	MC612PA	1SNK158052R0000	207	MC812PA	1SNK160111R0000	209
MC612PA	1SNK156141R0000	204	MC612PA	1SNK158061R0000	205	MC812PA	1SNK160112R0000	211
MC612PA	1SNK156142R0000	206	MC612PA	1SNK158062R0000	207	MC812PA	1SNK160121R0000	209
MC612PA	1SNK156151R0000	204	MC612PA	1SNK158071R0000	205	MC812PA	1SNK160122R0000	211
MC612PA	1SNK156152R0000	206	MC612PA	1SNK158072R0000	207	MC812PA	1SNK160131R0000	209
MC612PA	1SNK156161R0000	204	MC612PA	1SNK158091R0000	205	MC812PA	1SNK160132R0000	211
MC612PA	1SNK156162R0000	206	MC612PA	1SNK158092R0000	207	MC812PA	1SNK160141R0000	209
MC612PA	1SNK156171R0000	204	MC612PA	1SNK158101R0000	205	MC812PA	1SNK160142R0000	211
MC612PA	1SNK156172R0000	206	MC612PA	1SNK158102R0000	207	MC812PA	1SNK160151R0000	209
MC612PA	1SNK156181R0000	204	MC612PA	1SNK158111R0000	205	MC812PA	1SNK160152R0000	211
MC612PA	1SNK156182R0000	206	MC612PA	1SNK158112R0000	207	MC812PA	1SNK160161R0000	209
MC612PA	1SNK156191R0000	204	MC612PA	1SNK158121R0000	205	MC812PA	1SNK160162R0000	211
MC612PA	1SNK156192R0000	206	MC612PA	1SNK158122R0000	207	MC812PA	1SNK160171R0000	209
MC612PA	1SNK156201R0000	204	MC612PA	1SNK158131R0000	205	MC812PA	1SNK160172R0000	211
MC612PA	1SNK156202R0000	206	MC612PA	1SNK158132R0000	207	MC812PA	1SNK160181R0000	209
MC612PA	1SNK156211R0000	204	MC612PA	1SNK158141R0000	205	MC812PA	1SNK160182R0000	211
MC612PA	1SNK156212R0000	206	MC612PA	1SNK158142R0000	207	MC812PA	1SNK160191R0000	209
MC612PA	1SNK156221R0000	204	MC612PA	1SNK158151R0000	205	MC812PA	1SNK160192R0000	211
MC612PA	1SNK156222R0000	206	MC612PA	1SNK158152R0000	207	MC812PA	1SNK160201R0000	209
MC612PA	1SNK156231R0000	204	MC612PA	1SNK158161R0000	205	MC812PA	1SNK160202R0000	211
MC612PA	1SNK156232R0000	206	MC612PA	1SNK158162R0000	207	MC812PA	1SNK16021R0000	209
MC612PA	1SNK156241R0000	205	MC612PA	1SNK158171R0000	205	MC812PA	1SNK16022R0000	211
MC612PA	1SNK156242R0000	206	MC612PA	1SNK158172R0000	207	MC812PA	1SNK16022R0000	209
MC612PA	1SNK156251R0000	205	MC612PA	1SNK158181R0000	205	MC812PA	1SNK16022R0000	211
MC612PA	1SNK156252R0000	207	MC612PA	1SNK158182R0000	207	MC812PA	1SNK16031R0000	209
MC612PA	1SNK156261R0000	205	MC612PA	1SNK158192R0000	207	MC812PA	1SNK16032R0000	211
MC612PA	1SNK156262R0000	207	MC612PA	1SNK158202R0000	207	MC812PA	1SNK16041R0000	209
MC612PA	1SNK157001R0000	205	MC612PA	1SNK158212R0000	207	MC812PA	1SNK16042R0000	211
MC612PA	1SNK157002R0000	207	MC612PA	1SNK158222R0000	207	MC812PA	1SNK16051R0000	209
MC612PA	1SNK157011R0000	205	MC612PA	1SNK159001R0000	205	MC812PA	1SNK16052R0000	211
MC612PA	1SNK157012R0000	207	MC612PA	1SNK159002R0000	207	MC812PA	1SNK160561R0000	209
MC612PA	1SNK157021R0000	205	MC612PA	1SNK159011R0000	205	MC812PA	1SNK160562R0000	211
MC612PA	1SNK157022R0000	207	MC612PA	1SNK159012R0000	207	MC812PA	1SNK160571R0000	209
MC612PA	1SNK157031R0000	205	MC612PA	1SNK159999R0000	203	MC812PA	1SNK160572R0000	211
MC612PA	1SNK157032R0000	207	MC812	1SNK160000R0000	208	MC812PA	1SNK160581R0000	209
MC612PA	1SNK157041R0000	205	MC812-YL	1SNK160004R0000	208	MC812PA	1SNK160582R0000	211
MC612PA	1SNK157042R0000	207	MC812PA	1SNK160011R0000	209	MC812PA	1SNK160591R0000	209
MC612PA	1SNK157051R0000	205	MC812PA	1SNK160012R0000	211	MC812PA	1SNK160592R0000	211
MC612PA	1SNK157052R0000	207	MC812PA	1SNK160021R0000	209	MC812PA	1SNK165102R0000	211
MC612PA	1SNK157061R0000	205	MC812PA	1SNK160022R0000	211	MC812PA	1SNK166011R0000	209
MC612PA	1SNK157062R0000	207	MC812PA	1SNK160031R0000	209	MC812PA	1SNK166012R0000	211
MC612PA	1SNK157071R0000	205	MC812PA	1SNK160032R0000	211	MC812PA	1SNK166021R0000	209
MC612PA	1SNK157072R0000	207	MC812PA	1SNK160041R0000	209	MC812PA	1SNK166022R0000	211

Index

Type classification

Type	Order code	Page	Type	Order code	Page	Type	Order code	Page
MC812PA	1SNK166031R0000	209	MC812PA	1SNK167051R0000	210	ZS4-YL	1SNK505060R0000	56
MC812PA	1SNK166032R0000	211	MC812PA	1SNK167052R0000	212	ZS4-GN	1SNK505061R0000	56
MC812PA	1SNK166041R0000	209	MC812PA	1SNK167061R0000	210	ZS4-RD	1SNK505062R0000	56
MC812PA	1SNK166042R0000	211	MC812PA	1SNK167062R0000	212	ZS4-PR	1SNK505063R0000	56
MC812PA	1SNK166051R0000	209	MC812PA	1SNK167071R0000	210	ZS4-BR	1SNK505064R0000	56
MC812PA	1SNK166052R0000	211	MC812PA	1SNK167072R0000	212	ZS4-WH	1SNK505065R0000	56
MC812PA	1SNK166061R0000	209	MC812PA	1SNK167081R0000	210	ZS4-BK	1SNK505066R0000	56
MC812PA	1SNK166062R0000	211	MC812PA	1SNK167082R0000	212	ZS4-PE	1SNK505150R0000	67
MC812PA	1SNK166071R0000	209	MC812PA	1SNK167091R0000	210	ZS4-D2	1SNK505210R0000	110
MC812PA	1SNK166072R0000	211	MC812PA	1SNK167092R0000	212	ZS4-D1	1SNK505211R0000	111
MC812PA	1SNK166081R0000	209	MC812PA	1SNK168001R0000	210	ZS4-T3	1SNK505212R0000	120
MC812PA	1SNK166082R0000	211	MC812PA	1SNK168002R0000	212	ZS4-D2-BL	1SNK505220R0000	110
MC812PA	1SNK166091R0000	209	MC812PA	1SNK168011R0000	210	ZS4-D2-OR	1SNK505230R0000	110
MC812PA	1SNK166092R0000	211	MC812PA	1SNK168012R0000	212	ZS4-S	1SNK505310R0000	79
MC812PA	1SNK166101R0000	209	MC812PA	1SNK168021R0000	210	ZS4-S-T2	1SNK505311R0000	80
MC812PA	1SNK166102R0000	211	MC812PA	1SNK168022R0000	212	ZS4-S-T2.3	1SNK505312R0000	80
MC812PA	1SNK166111R0000	209	MC812PA	1SNK168031R0000	210	ZS4-SP	1SNK505313R0000	86
MC812PA	1SNK166112R0000	211	MC812PA	1SNK168032R0000	212	ZS4-SP-T2	1SNK505314R0000	87
MC812PA	1SNK166121R0000	209	MC812PA	1SNK168041R0000	210	ZS4-D2-S	1SNK505315R0000	116
MC812PA	1SNK166122R0000	211	MC812PA	1SNK168042R0000	212	ZS4-D2-S-T2	1SNK505316R0000	117
MC812PA	1SNK166131R0000	209	MC812PA	1SNK168051R0000	210	ZS4-S-BL	1SNK505320R0000	79
MC812PA	1SNK166132R0000	211	MC812PA	1SNK168052R0000	212	ZS4-S-T2-BL	1SNK505321R0000	80
MC812PA	1SNK166141R0000	209	MC812PA	1SNK168061R0000	210	ZS4-S-OR	1SNK505330R0000	79
MC812PA	1SNK166142R0000	211	MC812PA	1SNK168062R0000	212	ZS4-S-T2-OR	1SNK505331R0000	80
MC812PA	1SNK166151R0000	209	MC812PA	1SNK168071R0000	210	ES4	1SNK505910R0000	171
MC812PA	1SNK166152R0000	211	MC812PA	1SNK168072R0000	212	ES6-4S	1SNK505911R0000	171
MC812PA	1SNK166161R0000	209	MC812PA	1SNK168091R0000	210	ES6-3S	1SNK505912R0000	171
MC812PA	1SNK166162R0000	211	MC812PA	1SNK168092R0000	212	ES4-D2	1SNK505960R0000	171
MC812PA	1SNK166171R0000	209	MC812PA	1SNK168101R0000	210	ES4-T3	1SNK505961R0000	172
MC812PA	1SNK166172R0000	211	MC812PA	1SNK168102R0000	212	ZS6	1SNK506010R0000	57
MC812PA	1SNK166181R0000	209	MC812PA	1SNK168111R0000	210	ZS6-3S	1SNK506011R0000	58
MC812PA	1SNK166182R0000	211	MC812PA	1SNK168112R0000	212	ZS6-4S	1SNK506012R0000	59
MC812PA	1SNK166191R0000	209	MC812PA	1SNK168121R0000	210	ZS4-R2	1SNK506013R0000	104
MC812PA	1SNK166192R0000	211	MC812PA	1SNK168122R0000	212	ZS6-BL	1SNK506020R0000	57
MC812PA	1SNK166201R0000	209	MC812PA	1SNK168131R0000	210	ZS6-3S-BL	1SNK506021R0000	58
MC812PA	1SNK166202R0000	211	MC812PA	1SNK168132R0000	212	ZS6-4S-BL	1SNK506022R0000	59
MC812PA	1SNK166211R0000	209	MC812PA	1SNK168141R0000	210	ZS6-OR	1SNK506030R0000	57
MC812PA	1SNK166212R0000	211	MC812PA	1SNK168142R0000	212	ZS6-YL	1SNK506060R0000	57
MC812PA	1SNK166221R0000	209	MC812PA	1SNK168151R0000	210	ZS6-GN	1SNK506061R0000	57
MC812PA	1SNK166222R0000	211	MC812PA	1SNK168152R0000	212	ZS6-RD	1SNK506062R0000	57
MC812PA	1SNK166231R0000	210	MC812PA	1SNK168161R0000	210	ZS6-PR	1SNK506063R0000	57
MC812PA	1SNK166232R0000	212	MC812PA	1SNK168162R0000	212	ZS6-BR	1SNK506064R0000	57
MC812PA	1SNK166241R0000	210	MC812PA	1SNK168171R0000	210	ZS6-WH	1SNK506065R0000	57
MC812PA	1SNK166242R0000	212	MC812PA	1SNK168172R0000	212	ZS6-BK	1SNK506066R0000	57
MC812PA	1SNK166251R0000	210	MC812PA	1SNK168181R0000	210	ZS6-3S-YL	1SNK506067R0000	58
MC812PA	1SNK166252R0000	212	MC812PA	1SNK168182R0000	212	ZS6-4S-YL	1SNK506068R0000	59
MC812PA	1SNK166261R0000	210	MC812PA	1SNK168192R0000	212	ZS6-PE	1SNK506150R0000	68
MC812PA	1SNK166262R0000	212	MC812PA	1SNK168202R0000	212	ZS6-3S-PE	1SNK506151R0000	69
MC812PA	1SNK167001R0000	210	MC812PA	1SNK168212R0000	212	ZS6-4S-PE	1SNK506152R0000	70
MC812PA	1SNK167002R0000	212	MC812PA	1SNK168222R0000	212	ZS4-PE-R2	1SNK506153R0000	105
MC812PA	1SNK167011R0000	210	MC812PA	1SNK169001R0000	210	ZS6-D2	1SNK506210R0000	114
MC812PA	1SNK167012R0000	212	MC812PA	1SNK169002R0000	212	ZS6-D1	1SNK506211R0000	113
MC812PA	1SNK167021R0000	210	MC812PA	1SNK169011R0000	210	ZS6-D2-PE	1SNK506212R0000	114
MC812PA	1SNK167022R0000	212	MC812PA	1SNK169012R0000	212	ZS4-T3-R1	1SNK506213R0000	121
MC812PA	1SNK167031R0000	210	MC812PA	1SNK169999R0000	208	ZS6-D1-RD	1SNK506214R0000	113
MC812PA	1SNK167032R0000	212	ZS4	1SNK505010R0000	56	ZS6-D2-BL	1SNK506220R0000	112
MC812PA	1SNK167041R0000	210	ZS4-BL	1SNK505020R0000	56	ZS6-D2-OR	1SNK506230R0000	112
MC812PA	1SNK167042R0000	212	ZS4-OR	1SNK505030R0000	56	ZS6-D1-PE	1SNK506250R0000	115

Index

Type classification

Type	Order code	Page	Type	Order code	Page	Type	Order code	Page
ZS6-D2-YL	1SNK506260R0000	112	ES10-ST	1SNK508910R0000	172	ZK2.5-D2-BL	1SNK705220R0000	44
ZS6-D2-RD	1SNK506262R0000	112	ES4-D2-SF1	1SNK508911R0000	172	ZK2.5-D1-PE	1SNK705250R0000	47
ZS6-D2-WH	1SNK506265R0000	112	ES4-SF	1SNK508960R0000	172	ZK2.5-S	1SNK705310R0000	39
ZS6-D2-BK	1SNK506266R0000	112	ZS16	1SNK510010R0000	61	ZK2.5-SP	1SNK705311R0000	41
ZS4-S-R1	1SNK506310R0000	105	ZS16-BL	1SNK510020R0000	61	ZK2.5-S-BL	1SNK705320R0000	39
ZS4-S-T2-R1	1SNK506311R0000	82	ZS16-OR	1SNK510030R0000	61	ZK2.5-S-OR	1SNK705330R0000	39
ZS4-S-T2.3-R1	1SNK506312R0000	82	ZS16-PE	1SNK510150R0000	72	EK2.5	1SNK705910R0000	167
ZS4-SP-R1	1SNK506313R0000	88	ZS25	1SNK512010R0000	62	EK2.5-3P	1SNK705911R0000	167
ZS4-SP-T2-R1	1SNK506314R0000	89	ZS25-BL	1SNK512020R0000	62	EK2.5-4P	1SNK705912R0000	167
ZS6-S	1SNK506315R0000	83	ZS25-YL	1SNK512060R0000	62	EK2.5-D2	1SNK705960R0000	168
ZS6-S-4S-T2	1SNK506316R0000	84	ZS25-PE	1SNK512150R0000	73	ZK4	1SNK706010R0000	22
ZS4-S-R1-BL	1SNK506320R0000	81	ZS35	1SNK516010R0000	63	ZK4-3P	1SNK706011R0000	40
ZS4-S-T2-R1-BL	1SNK506321R0000	82	ZS50	1SNK516011R0000	64	ZK4-4P	1SNK706012R0000	24
ZS6-S-BL	1SNK506322R0000	83	ZS35-BL	1SNK516020R0000	63	ZK4-BL	1SNK706020R0000	22
ZS4-S-R1-OR	1SNK506330R0000	81	ZS50-BL	1SNK516021R0000	64	ZK4-3P-BL	1SNK706021R0000	23
ZS4-S-T2-R1-OR	1SNK506331R0000	82	ZS35-OR	1SNK516030R0000	63	ZK4-4P-BL	1SNK706022R0000	24
ZS4-SF	1SNK506410R0000	106	ZS50-YL	1SNK516060R0000	64	ZK4-OR	1SNK706030R0000	22
ZS4-SF-T2	1SNK506411R0000	101	ZS35-PE	1SNK516150R0000	74	ZK4-3P-OR	1SNK706031R0000	23
ZS4-SF-R1	1SNK506412R0000	102	ZS50-PE	1SNK516151R0000	76	ZK4-4P-OR	1SNK706032R0000	24
ZS4-SF-R2	1SNK506413R0000	103	ZS35-PEN	1SNK516170R0000	75	ZK4-PE	1SNK706150R0000	32
ZS4-S-R2	1SNK506414R0000	106	ZS70	1SNK522010R0000	65	ZK4-PE-3P	1SNK706151R0000	33
ZS4-SF-R3	1SNK506415R0000	102	ZS70-BL	1SNK522020R0000	65	ZK4-PE-4P	1SNK706152R0000	34
ZS4-SF-R4	1SNK506416R0000	103	ZS70-YL	1SNK522060R0000	65	ZK2.5-S-R1	1SNK706310R0000	40
ZS10	1SNK508010R0000	60	ZS70-PE	1SNK522150R0000	77	ZK2.5-SF	1SNK706410R0000	42
ZS10-R1	1SNK508011R0000	129	ZS95	1SNK526010R0000	66	ZK2.5-SF-R1	1SNK706411R0000	43
ZS4-R1	1SNK508013R0000	98	ZS95-BL	1SNK526020R0000	66	ZK2.5-SF-R3	1SNK706412R0000	43
ZS10-BL	1SNK508020R0000	60	ZS95-YL	1SNK526060R0000	66	ZK6	1SNK708010R0000	25
ZS10-OR	1SNK508030R0000	60	ZS95-PE	1SNK526150R0000	78	ZK6-3P	1SNK708011R0000	26
ZS10-YL	1SNK508060R0000	60	ZK2.5	1SNK705010R0000	19	ZK6-BL	1SNK708020R0000	25
ZS10-GN	1SNK508061R0000	60	ZK2.5-3P	1SNK705011R0000	20	ZK6-3P-BL	1SNK708021R0000	26
ZS10-RD	1SNK508062R0000	60	ZK2.5-4P	1SNK705012R0000	21	ZK6-OR	1SNK708030R0000	25
ZS10-PR	1SNK508063R0000	60	ZK2.5-BL	1SNK705020R0000	19	ZK6-3P-OR	1SNK708031R0000	26
ZS10-BR	1SNK508064R0000	60	ZK2.5-3P-BL	1SNK705021R0000	20	ZK6-PE	1SNK708150R0000	35
ZS10-WH	1SNK508065R0000	60	ZK2.5-4P-BL	1SNK705022R0000	21	ZK6-PE-3P	1SNK708151R0000	36
ZS10-BK	1SNK508066R0000	60	ZK2.5-OR	1SNK705030R0000	19	EK6-3P	1SNK708911R0000	168
ZS10-PE	1SNK508150R0000	71	ZK2.5-3P-OR	1SNK705031R0000	20	ZK10	1SNK710010R0000	27
ZS10-PE-R1	1SNK508151R0000	130	ZK2.5-4P-OR	1SNK705032R0000	21	ZK10-BL	1SNK710020R0000	27
ZS10-ST	1SNK508310R0000	126	ZK2.5-YL	1SNK705060R0000	19	ZK10-OR	1SNK710030R0000	27
ZS10-ST-T4	1SNK508311R0000	128	ZK2.5-GN	1SNK705061R0000	19	ZK10-PE	1SNK710150R0000	37
ZS10-ST-1	1SNK508312R0000	127	ZK2.5-RD	1SNK705062R0000	19	EK10	1SNK710910R0000	168
ZS10-S	1SNK508315R0000	85	ZK2.5-WH	1SNK705065R0000	19	ZK16	1SNK712010R0000	28
ZS10-SP	1SNK508316R0000	90	ZK2.5-BK	1SNK705066R0000	19	ZK16-BL	1SNK712020R0000	28
ZS10-S-BL	1SNK508320R0000	85	ZK2.5-3P-YL	1SNK705067R0000	20	ZK16-PE	1SNK712150R0000	38
ZS4-SF1	1SNK508410R0000	99	ZK2.5-3P-GN	1SNK705068R0000	20	ZDK2.5-22	1SNK805010R0000	140
ZS4-SF1-T2	1SNK508411R0000	95	ZK2.5-3P-RD	1SNK705069R0000	20	ZDS4-22	1SNK805013R0000	144
ZS4-SF1-R1	1SNK508412R0000	96	ZK2.5-3P-WH	1SNK705072R0000	20	CDK2.5	1SNK805712R0000	141
ZS4-SF1-R2	1SNK508413R0000	97	ZK2.5-3P-BK	1SNK705073R0000	20	CDK2.5-E	1SNK805713R0000	141
ZS4-SF1-R3	1SNK508414R0000	96	ZK2.5-4P-YL	1SNK705074R0000	21	CDS4	1SNK805714R0000	145
ZS4-SF1-R4	1SNK508415R0000	97	ZK2.5-4P-GN	1SNK705075R0000	21	CDS4-E	1SNK805715R0000	147
ZS4-S-R3	1SNK508416R0000	99	ZK2.5-4P-RD	1SNK705076R0000	21	EDK2.5-22	1SNK805910R0000	183
ZS10-S-R2	1SNK508417R0000	109	ZK2.5-4P-WH	1SNK705079R0000	21	EDS4-22	1SNK805911R0000	183
ZS10-SF	1SNK508418R0000	109	ZK2.5-4P-BK	1SNK705080R0000	21	ZDK4-22	1SNK806010R0000	142
ZS10-SF-R1	1SNK508421R0000	108	ZK2.5-PE	1SNK705150R0000	29	ZDS4-22-R1	1SNK806013R0000	146
ZS10-SF-R3	1SNK508422R0000	108	ZK2.5-PE-3P	1SNK705151R0000	30	CDK4	1SNK806712R0000	143
ZS4-D2-SF1-R1	1SNK508423R0000	119	ZK2.5-PE-4P	1SNK705152R0000	31	CDK4-E	1SNK806713R0000	143
ZS4-D2-SF1-R3	1SNK508424R0000	119	ZK2.5-D2	1SNK705210R0000	46	CDS4-R1	1SNK806714R0000	147
ZS4-D2-SF1	1SNK508425R0000	118	ZK2.5-D1	1SNK705211R0000	45	BAM3	1SNK900001R0000	153
ZS4-SF1-OR	1SNK508430R0000	94	ZK2.5-D2-PE	1SNK705212R0000	46	BAZ1	1SNK900002R0000	154

Index

Type classification

Type	Order code	Page	Type	Order code	Page
CS	1SNK900101R0000	177	JB6-10	1SNK906310R0000	157
BAZH1	1SNK900102R0000	153	JB6-50	1SNK906350R0000	157
CS-R1	1SNK900103R0000	177	JB8-2	1SNK908302R0000	158
ES-TC8	1SNK900104R0000	163	JB8-3	1SNK908303R0000	158
ES-TC6	1SNK900105R0000	163	JB8-4	1SNK908304R0000	158
CS-R2	1SNK900106R0000	169	JB8-5	1SNK908305R0000	158
CS-R3	1SNK900107R0000	169	JB8-10	1SNK908310R0000	158
TC5	1SNK900200R0000	163	JB8-2-R1	1SNK908902R0000	173
TC5-R1	1SNK900201R0000	163	JB8-3-R1	1SNK908903R0000	173
TP2	1SNK900203R0000	162	JB8-4-R1	1SNK908904R0000	173
TP4	1SNK900205R0000	162	JB8-5-R1	1SNK908905R0000	173
PG5	1SNK900401R0000	165	JB8-10-R1	1SNK908910R0000	173
PG5-R1	1SNK900402R0000	165	JB10-2	1SNK910302R0000	159
PG5-R2	1SNK900403R0000	164	JB10-3	1SNK910303R0000	159
SHBS	1SNK900600R0000	178	JB10-4	1SNK910304R0000	159
SHBP	1SNK900601R0000	170	JB10-5	1SNK910305R0000	159
SHB	1SNK900602R0000	178	JB10-10	1SNK910310R0000	159
JB85-3	1SNK900603R0000	161	JB12-2	1SNK912302R0000	160
CO	1SNK900604R0000	180	JB12-3	1SNK912303R0000	160
LH	1SNK900605R0000	155	JB12-5	1SNK912305R0000	160
LH-R1	1SNK900607R0000	155	JB16-2	1SNK916302R0000	174
UMH	1SNK900611R0000	213	JB16-3	1SNK916303R0000	174
PL5	1SNK900618R0000	179	JB16-4	1SNK916304R0000	174
PL6	1SNK900619R0000	179	JB16-5	1SNK916305R0000	174
PL8	1SNK900620R0000	179	JB16-10	1SNK916310R0000	174
PL10	1SNK900621R0000	179	JB22-2	1SNK922302R0000	174
PL16	1SNK900622R0000	179	JB22-3	1SNK922303R0000	174
KCO	1SNK900624R0000	180	JB22-5	1SNK922305R0000	174
RILS	1SNK900627R0000	178	JB22-10	1SNK922310R0000	174
MCLH	1SNK900630R0000	214	JB26-2	1SNK926302R0000	175
MCLH-R1	1SNK900631R0000	214	JB26-3	1SNK926303R0000	175
MCLH-YL	1SNK900633R0000	214	JB26-5	1SNK926305R0000	175
MCLH-R1-YL	1SNK900634R0000	214	JB26-10	1SNK926310R0000	175
COP-ZD	1SNK900636R0000	184			
VR-ZD	1SNK900637R0000	184			
VR-ZD-R1	1SNK900638R0000	184			
TO3.5-50	1SNK900640R0000	166			
TO4-100	1SNK900641R0000	166			
TO5.5-125	1SNK900642R0000	166			
TO6.5-150	1SNK900643R0000	166			
TO3.5-100-INS	1SNK900644R0000	166			
PS-3	1SNK900650R0000	166			
SC-JB8-2	1SNK900652R0000	181			
SC-JB8-3	1SNK900653R0000	181			
SC-JB8-4	1SNK900654R0000	181			
SC-JB8-5	1SNK900655R0000	181			
SC-JB8-3-OR	1SNK900657R0000	181			
SC-JB8-4-OR	1SNK900658R0000	181			
JB5-2	1SNK905302R0000	156			
JB5-3	1SNK905303R0000	156			
JB5-4	1SNK905304R0000	156			
JB5-5	1SNK905305R0000	156			
JB5-10	1SNK905310R0000	156			
JB5-50	1SNK905350R0000	156			
JB6-2	1SNK906302R0000	157			
JB6-3	1SNK906303R0000	157			
JB6-4	1SNK906304R0000	157			
JB6-5	1SNK906305R0000	157			

Marketing material

<http://new.abb.com/low-voltage/connection>

HOME > PRODUCTS > LOW VOLTAGE PRODUCTS > CONNECTION DEVICES

Connection devices

One of the largest connection offerings on the market

ABB proposes one of the largest connection offerings on the market with various technologies: screw, Pi-Spring (Push-in and spring), spring, IDC, pluggable, stud... technologies found in over 8000 products and solutions.

Main benefits

- High quality products: benefit from the best connection.
- Simplification and acceleration of flows: reliable expertise in delivery times.
- Innovating for tomorrow's solutions.
- Perfect connection reliability in response to all connection challenges.

Main features

- Connecting capacity: from 0.22 to 300 mm² (22AWG to 1000kcmil).
- Large offering covering all applications and functions.
- Worldwide availability.
- Exclusive solutions and technologies like ADO System[®] terminal blocks, ESSAILEC[®] test blocks, Interfast the pre-wiring system for PLC's.

Are you looking for support or purchase information?
→ Contact us

Our offering

<p>SNK Series The innovative range available in Pi-Spring (Push-in and spring), screw clamp and pluggable technologies with common accessories. → Link</p>	<p>SNA Series The well known historical range is available in screw clamp and stud technologies with a large choice of sections and colours variants. → Link</p>	<p>Solution series Polyvalent range featuring: IDC, spring loaded, quick-connect technologies and specific solutions such as interfast PLC's pre-wiring system, and ESSAILEC[®] CT & VT test blocks. → Link</p>	<p>Markers and marking systems The markers and marking systems offering covers all the needs for electrical panel identification: markers and labels for terminal block, wire & cable, component & equipment... → Link</p>
---	---	---	---

Our technologies

<p>Screw clamp technology The ABB screw clamp technology is designed to provide a reliable and safe connection and avoid accidental release due to vibrations, shocks or even abusive cable draw. → Link</p>	<p>Pi-Spring (Push-in and spring) technology The patented design of ABB's Pi-Spring features the benefits of two technologies (Push-in and spring) in one connection. → Link</p>	<p>Spring technology The ABB spring clamp technology offers connection flexibility with front entry connection. → Link</p>	<p>Spring loaded screw clamp technology The spring loaded technology is designed to guaranty electrical continuity even when screw are loosened unintentionally. → Link</p>
---	---	---	--



Web site totally responsive

Tools



Technical data for Screen Clamps Tills

ZS4

Product description	...
Product No.	...
Category	...
Product family	...
Product type	...
Product code	...
Product name	...
Product description	...
Product family	...
Product type	...
Product code	...
Product name	...

For product detailed information, use product type or order code, ex: www.abb.com/productdetails/ZS4 or www.abb.com/productdetails/1SNK505010R0000

Cadenas portal: Download 2D or 3D files according to your needs (STEP, IGES...)

Catalogs



Contact us

ABB France
Low Voltage Products Division
3, rue Jean Perrin
F-69687 Chassieu cedex / France

You can find the address of your local sales organisation
on the [ABB home page](#)



<http://www.abb.com/lowvoltage>

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice.
ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2015 ABB - All rights reserved