

PANEL FABRICATION



FUSES

FLM, FLQ, FNQ, GF, K235, 251 SERIES

DESCRIPTION

The Littelfuse FLM, FLQ, FNQ series midjet fuses are slow-acting fuses used with 6SC30 & 6SM30 Series, 6M30 Series, 6W30 Series, and FB2X Series fuse holders. The KLK-3 series fuses are fast-acting fuses.

SPECIFICATIONS/ORDERING INFORMATION

AMP RATING	250V MODEL	500V MODEL	600V MODEL
0.5	FLM-0.5	FLQ-0.5	FNQ-R-0.5
0.8	FLM-0.8	FLQ-0.8	FNQ-R-0.8
1.0	FLM-1	FLQ-1	FNQ-R-1
1.25	FLM-1.25	FLQ-1.25	FNQ-R-1.25
1.5	FLM-1.5	FLQ-1.5	FNQ-R-1.5
2.0	FLM-2	FLQ-2	FNQ-R-2
2.5	FLM-2.5	FLQ-2.5	FNQ-R-2.5
3.0	FLM-3	FLQ-3	FNQ-R-3
4.0	FLM-4	FLQ-4	FNQ-R-4
5.0	FLM-5	FLQ-5	FNQ-R-5
7.0	FLM-7	FLQ-7	FNQ-R-7
10.0	FLM-10	FLQ-10	FNQ-R-10
15.0	FLM-15 (125 VAC)	FLQ-15	FNQ-R-15
20.0	FLM-20 (32 VAC)	FLQ-20	FNQ-R-20
30.0	FLM-30 (32 VAC)	FLQ-30	FNQ-R-30
AMP RATING	600V MODEL		
3.0A	KLK-3		

RELATED PRODUCTS

MODEL	DESCRIPTION
L600	General Fuse Block
LPSC	Fuse Block for FNQ fuse
LPSM	Fuse block for FLM or FLQ fuses



FLM/FLQ/KLK Series


FNQ-R



APPLICATION

- FLM/FLQ/FNQ Series - Inductive loads, power supplies, control transformers, control circuits with high inrush currents
- KLK-3 - Watt meters, watt transducers, and control circuits without high inrush currents
- FLM/FLQ/KLK UL File E19180; FNQ UL File E4273

DIMENSIONS

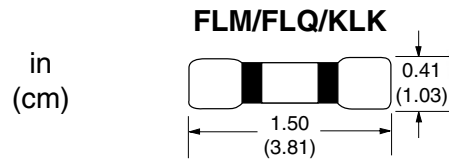

DESCRIPTION

The Littelfuse GF and K235 Series glass fuses are available in slow-blow and fast-acting models.

FEATURES

- GF Series for use with M10/16SFL fuse holder, HKP-HH and HRK
- K235 Series for use with M4/8 and ZS4 Series Disconnect Switch and Fuse Holders
- GF & K235 UL File E19180; HKP-HH & HRK UL File E72169

SPECIFICATIONS / ORDERING INFORMATION

(Order QTY 1 = Standard package of 5)

AMP RATING	VOLTAGE	FAST-ACTING FUSE	SLOW-BLOW FUSE	FAST-ACTING
0.5	250	GF-0.5	GF-0.5S	K235-0.5
1	250	GF-1	GF-1S	K235-1
1.5	250	GF-1.5	GF-1.5S	K235-1.5
2	250	GF-2	GF-2S	K235-2
2.5	250	GF-2.5	GF-2.5S	K235-2.5
3	250	GF-3	GF-3S	K235-3
5	250	GF-5	GF-5S	K235-5 (125V)
7	250	GF-7	GF-7S	K235-7 (125V)
10	250	GF-10	GF-10S*	K235-10 (125V)
15	250	GF-15*	GF-15S*	

HRK Inline fuseholder, 32V, 15A, for 1/4" fuses 7/8"-1-1/4"

HKP-HH Panel mount fuseholder, 250V, 15A, for 1/4" x 1-1/4" fuses

* Ceramic tube fuse




GF, K235 Series

HRK



DIMENSIONS

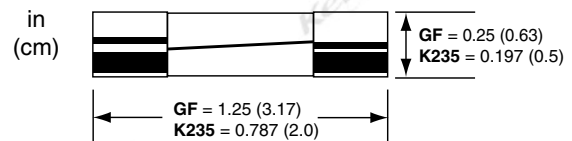


DESCRIPTION

The Littelfuse 251 Series fast-acting circuit board type fuses are sold in packs of 5 and range from 0.125 A to 2.0 A ratings.

SPECIFICATIONS / ORDERING INFORMATION

(Order QTY 1 = Standard package of 5)

AMP RATING	125V MODEL
1/8	#251.125
1/2	#251.500
1	#251001
2	#251002



251 Series

FEATURES

- UL File E19180eps



DIMENSIONS

