

CURRENT TRANSFORMERS

SOLID CORE CURRENT TRANSFORMERS

MODEL AL

FEATURES

- UL Recognized
- Window I.D. - 1.05"
- Use with Ammeters


600V CLASS



SPECIFICATIONS

Frequency 50-400Hz
 Insulation Class 0.6KV, BIL 10KV Full Wave
 Flexible Leads UL1015, 105°C, CSA approved, #16 AWG, 24"
 Weight Approximately 0.5 lb.

DIMENSIONS

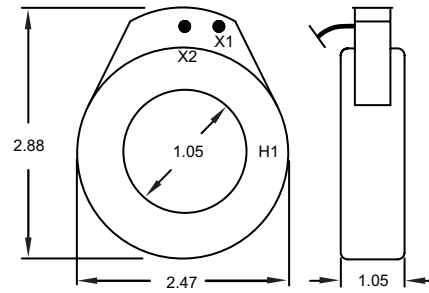

All Dimensions In Inches

APPLICATION AND ORDERING DATA

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
AL-500	50:5	± 3%	2.0
AL-600	60:5	± 2%	2.0
AL-750	75:5	± 2%	2.0
AL-800	80:5	± 2%	2.0
AL-101	100:5	± 1%	2.0
AL-121	120:5	± 1%	2.5
AL-1250	125:5	± 1%	2.5
AL-151	150:5	± 1%	4.0
AL-201	200:5	± 1%	4.0
AL-251	250:5	± 1%	6.0
AL-301	300:5	± 1%	8.0
AL-401	400:5	± 1%	10.0

SOLID CORE CURRENT TRANSFORMERS

MODEL 7RL

FEATURES

- UL Recognized
- Window I.D. - 2.50"
- Use with Ammeters, Wattmeters


600V CLASS



SPECIFICATIONS

Frequency 50-400Hz
 Insulation Class 0.6KV, BIL 10KV Full Wave
 Flexible Leads UL1015, 105°C, CSA approved, #16 AWG, 24"
 Weight Approximately 1.5 lb.

DIMENSIONS

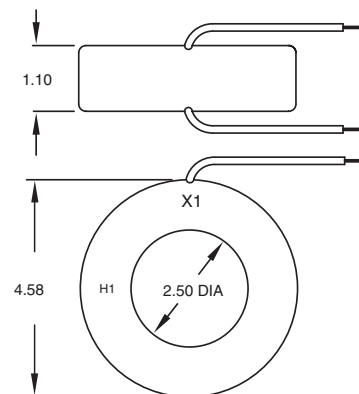

All Dimensions In Inches

APPLICATION AND ORDERING DATA

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
7RL-301	300:5	± 1%	12.5
7RL-401	400:5	± 1%	15.0
7RL-501	500:5	± 1%	25.0
7RL-601	600:5	± 1%	30.0
7RL-751	750:5	± 1%	30.0
7RL-801	800:5	± 1%	35.0
7RL-102	1000:5	± 1%	35.0
7RL-122	1200:5	± 1%	35.0
7RL-152	1500:5	± 1%	40.0
7RL-162	1600:5	± 1%	45.0

FLEX-CORE®

Div. Morlan & Associates, Inc.
 6625 McVey Blvd. Columbus, Ohio 43235

WWW.FLEX-CORE.COM
 sales@flex-core.com

PHONE (614) 889-6152
 TECH. ASSISTANCE (614) 876-8308
 FAX # (614) 876-8538