


### FEATURES

- DIN rail power relay
- Relay output form: SPDT – 16 Amps
- Output indicator is intensified by lens.  
Red LED is standard, other colors are available.
- Coil is diode-suppressed
- DIN rail mounting
- UL and CE approvals, RoHS compliant

### FEATURES

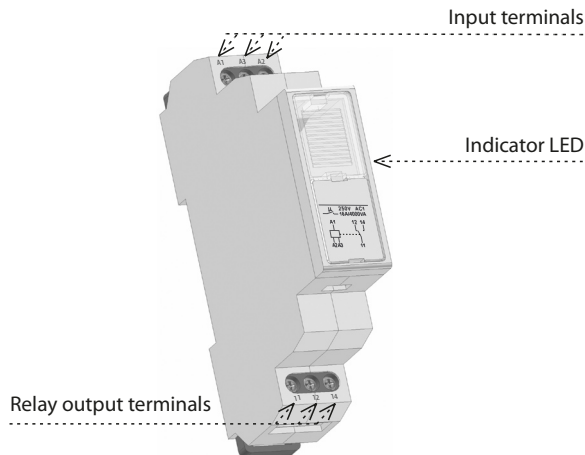

### SPECIFICATIONS

<b>Input terminals</b> . . . . .	A1–A3
<b>Input voltage</b> . . . . .	12–240VAC/VDC (50–60 Hz)
<b>Power Consumption (max)</b>	AC 0.7–3VA / DC 0.5–1.7W
<b>Input voltage tolerance</b> . . .	-15% to +10%
<b>Relay output form</b> . . . . .	SPDT
<b>Rated current</b> . . . . .	16Amps / AC
<b>Switching capacity</b> . . . . .	4000 VA/ AC, 384 W/ DC
<b>Inrush current</b> . . . . .	30A / < 3s
<b>Switching voltage (max)</b> . . .	250VAC / 24VDC
<b>Switching capacity DC (min)</b>	500mW
<b>Output indicator</b> . . . . .	Red LED standard, other colors available
<b>Mechanical life</b> . . . . .	30 million operations
<b>Electrical life (resistive)</b> . . .	70,000 operations
<b>Relay transfer</b> . . . . .	10ms
<b>Operating temperature</b> . . .	-20°C to +55°C
<b>Storage temperature</b> . . . . .	-30°C to +70°C
<b>Dielectric strength</b> . . . . .	4 kV
<b>Operating position</b> . . . . .	any
<b>Mounting</b> . . . . .	DIN rail EN 60715
<b>Protection degree</b> . . . . .	IP 40 from front panel
<b>Wire size (max)</b> . . . . .	14AWG
<b>Standards</b> . . . . .	EN 61811-1, EN 61010-1, UL, CE, RoHS

### WIRING DIAGRAM

