


FEATURES

- DIN rail power relay
- Relay output form: 3PDT – 8 Amps
- Output indicator is intensified by lens.
Red LED is standard, other colors are available.
- Coil is diode-suppressed
- DIN rail mounting
- UL and CE approvals, RoHS compliant

FEATURES

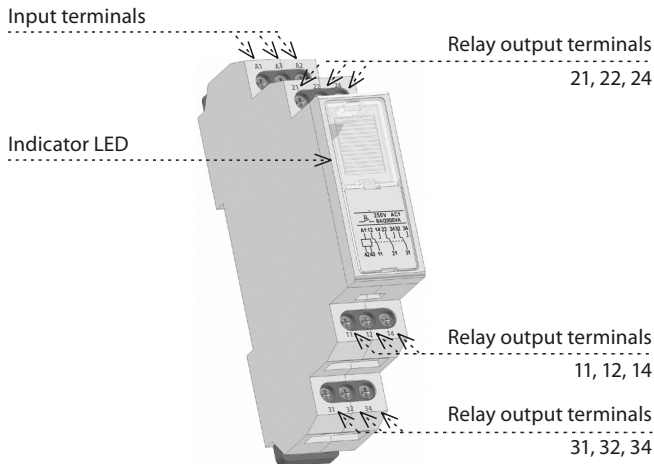

SPECIFICATIONS

Input terminals	A1–A3
Input voltage	12–240VAC/VDC (50–60 Hz)
Power Consumption (max) . .	AC 0.7–3VA / DC 0.5–1.7W
Input voltage tolerance . . .	-15% to +10%
Relay output form	3PDT
Rated current	8Amps / AC
Switching capacity	2000 VA/ AC, 192 W/ DC
Inrush current	10A / < 3s
Switching voltage (max) . . .	250VAC / 24VDC
Switching capacity DC (min)	500mW
Output indicator	Red LED standard, other colors available
Mechanical life	30 million operations
Electrical life (resistive) . . .	70,000 operations
Relay transfer	10ms
Operating temperature . . .	-20°C to +55°C
Storage temperature	-30°C to +70°C
Dielectric strength	4 kV
Operating position	any
Mounting	DIN rail EN 60715
Protection degree	IP 40 from front panel
Wire size (max)	14AWG
Standards	EN 61811-1, EN 61010-1, UL, CE, RoHS

WIRING DIAGRAM

