



POWER MONITORING & PROTECTION

SURGE PROTECTORS

DTK-120HW

DESCRIPTION

The Ditek DTK-120HW surge protectors are compact, parallel-mount surge protectors widely used to protect power line, telephone line, and data lines.

FEATURES

- *Approved for 20A circuit breakers*
- *Diagnostic LED indicates ground presence, system power and SPD function*
- *Weather-proof enclosure*
- *Small footprint*




DTK-120HW

SPECIFICATIONS

Service Voltage	120 VAC	Response Time	<1 ns
Frequency	0 Hz- 400 Hz	Connections	3/4" hub-mount 3-12 AWG leads
Filtering	RFI/EMI noise	Dimensions	3.4"H x 3.47"W x 1.89"D (8.6 x 8.8 x 1.89 cm)
Continuous Current	Unlimited	Weight	0.5 lb (0.22 Kg)
Protection	700 V L-N, L-G 600V N-G	Approvals	UL 1449, IEEE C62.41B, File #E136659
Clamping Level	130 VRMS/185V peak	Warranty	10 years
Surge Current	19,500A		

WIRING

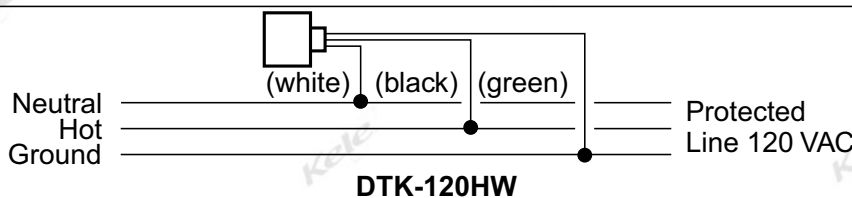

ORDERING INFORMATION

MODEL	DESCRIPTION
DTK-120HW	120V inline surge protector

POWER MONITORING & PROTECTION

15