



SDU AC - A SERIES (500 VA AND 850 VA) DIN RAIL UPS – PRODUCT GUIDE

SDU AC - A SERIES, DIN RAIL UPS

The SDU AC - A Series DIN Rail UPS combines an industry leading compact design with enhanced communications, a wide operational temperature range and unique installation options. The UPS series is a cost effective solution providing ride through during brief power outages and allows for safe equipment shutdown to prevent data loss, work interruptions and equipment damage during longer outages. These units include easy to wire screw terminations for devices needing battery back-up such as microprocessor-based or computer based control systems.

The SDU AC - A Series communications port is designed for networked Industrial Ethernet (example: EtherNet/IP™) protocols or discrete (passive – dry contact relay) I/O applications. The optional communication cards provide flexibility required while saving valuable DIN rail space. The SDU AC - A Series can be used in a variety of applications and industries that rely heavily upon robotics, factory automation, PLCs, conveying equipment, CNC machinery, and throughout the Industrial Internet of Things (IIoT) environments.

APPLICATIONS

- Programmable Logic Controllers
- Factory Automation
- Robotics
- Conveying Equipment
- Computer-based Control Systems
- Industrial Internet of Things (IIoT) environment

FEATURES

- Lightweight, compact industrial design
- Communications port for optional Industrial Ethernet protocols or discrete communication card
- Wide operation temperature range (0 °C to 50 °C)
- Cold start capability
- Software and cable included for easy installation
- Simulated sinewave output
- USB communication port
- Remote turn-on and shutdown capabilities
- Two year limited warranty
- Panel/wall mounting brackets (optional)

CERTIFICATIONS AND COMPLIANCES

- **CE**
 - Low Voltage Directive: EN62040-1
 - EMC Directive: EN62040-2
- Class 1 Division 2 - ANSI ISA 12.12.01/CSA 213
- RoHS Compliant
- **UL** UL Recognized Component, UPS Equipment
 - UL 1778 5th Ed., CSA C22.2 No. 107.3
 - Suitable for UL 508 at full load output (no derating) and Industrial Control Equipment Applications CSA C22.2 No. 107.1
 - Overvoltage Cat III, Pollution Degree III
 - ODVA CONFORMANT™
EtherNet/IP™ SDUENETIPCARD has been tested and approved for conformance by the ODVA. More information about EtherNet/IP™ and the ODVA can be obtained from the following website: www.odva.org.

RELATED PRODUCTS


- Portable MCR Power Conditioners
- SDN DIN Rail Power Supplies
- STV Surge Protective Devices
- STFV Plus Active Tracking® Filters



Selection Table

Catalog Number	Capacity (VA/W)	Volts, Frequency In/Out	Typical Back-Up Time (minutes) At full load/half load.	Input/Output Connections	Approx. Ship Weight - kg (lbs)
SDU 500A	500/300	120 Vac, 50/60 Hz	4/18	IP20 touch proof, screw terminals. Wire range: 10 ~ 18 AWG.	10.6 (4.8)
SDU 850A	850/510		2/10		11.5 (5.2)
SDU 500A-5	500/300	230 Vac, 50/60 Hz	4/18		10.6 (4.8)
SDU 850A-5	850/510		2/10		11.5 (5.2)

LIGHTWEIGHT, COMPACT DESIGN

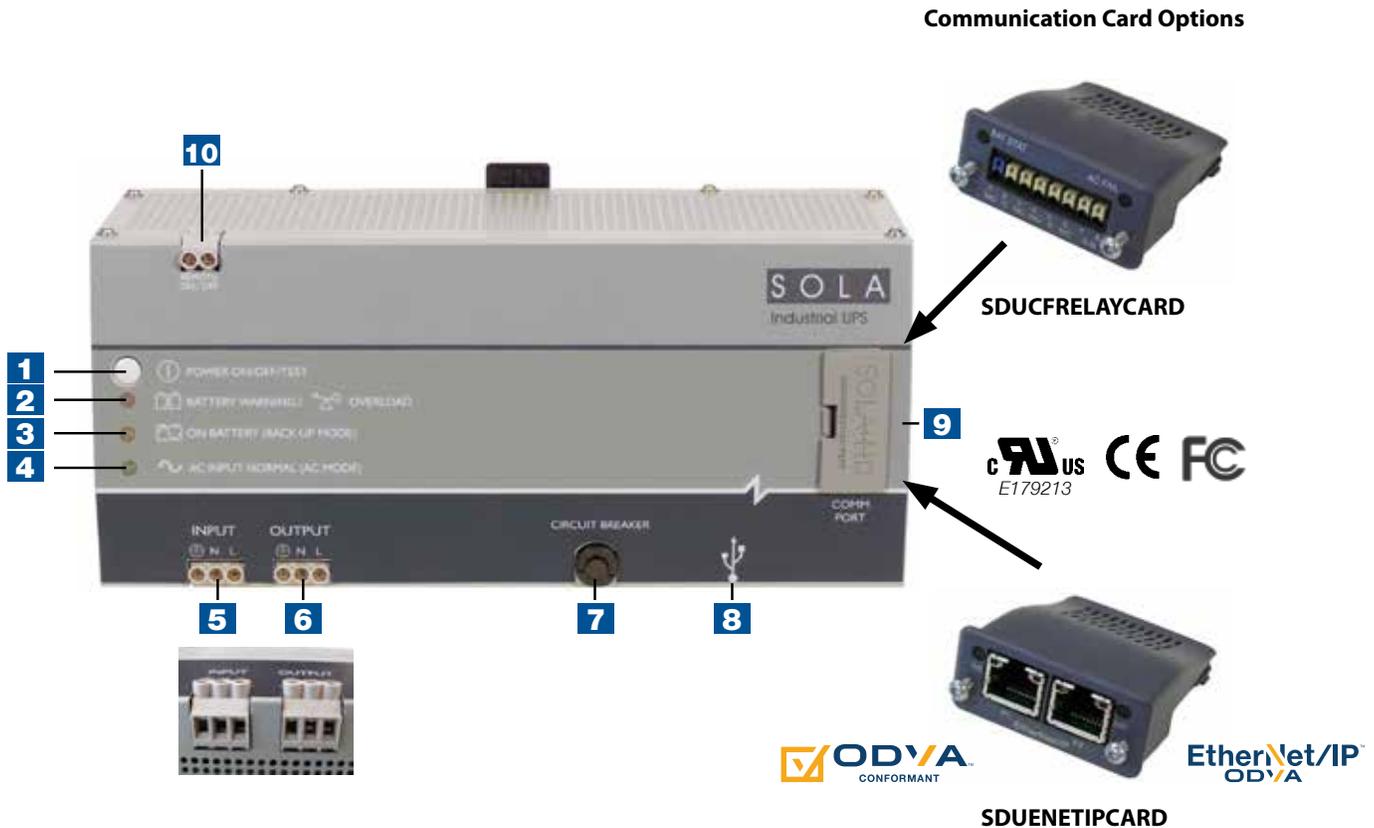

- 1 POWER ON/OFF/TEST:**
 ON - To turn the UPS ON, press and release the button for more than 2 seconds until you hear “3 quick beeps” and the LEDs light. SELF-TEST - Press the button for less than one second to activate the self-testing.
 OFF - Press for more than five seconds to turn OFF LED , UPS turn on.
- 2 Battery Warning/Overload Indicator (Red LED):**
 The LED flashes when the battery needs to be recharged and tested.
 The LED will illuminate when the unit is subjected to an overload condition.
 If the unit shuts down due to overload, the LED and alarm will continue for two minutes.
- 3 ON Battery Indicator (Yellow LED):** The LED illuminates when the UPS is supplying battery power to the loads.
- 4 AC Input Normal Indicator (Green LED):** The LED illuminates when the line input voltage is normal.
- 5 Input:** IP20-rated Input Screw Terminals.
- 6 Output:** IP20-rated Output Screw Terminals.
- 7 Input Circuit Breaker:** Protection from AC overload and short circuit.
- 8 USB Port:** High speed 2.0 Standard USB Type B Peripheral Communication Port used to establish control and monitoring with UPSMON software.
- 9 COMM PORT:** Communication card slot.
 COMM CARDS: SDUCFRELAYCARD and SDUENETIPCARD NETWORK COMM CARD can be purchased separately.
 The UPS can detect the presence of a COMM CARD and identify what kind of COMM CARD is inserted.
 USB communication will have precedence over COMM CARDS.
- 10 REMOTE ON/OFF TERMINALS:** Use a switch to remotely toggle ON/OFF state. Non-Polarized terminals.

INDUSTRIAL STRENGTH PROTECTION

Catalog Number	SDU 500A	SDU 850A	SDU 500A-5	SDU 850A-5
Capacity (VA/Watts)	500/300	850/510	500/300	850/510
Load Power Factor	0.6			
Dimensions - inches (mm)				
Unit (H x W x D) - in. (mm)	4.87 x 11.1 x 4.81 (123.7 x 281.9 x 122.3)			
Weight - lbs (kg)	10.6 (4.8)	11.5 (5.2)	10.6 (4.8)	11.5 (5.2)
Input Parameters				
Voltage	120 V (+10%, -20%)		230 V (+/- 15%)	
Frequency	50 +/- 5 Hz or 60 Hz +/- 6 Hz (auto sensing)			
Output AC Parameters				
Voltage (Battery Mode)	Simulated sinewave +/- 5%			
Frequency (On Battery)	50 or 60 Hz +/- 0.3 Hz			
Overload Protection	UPS automatic shutdown if overload exceeds: 105% of nominal at 20 seconds 120% of nominal at 10 seconds 130% of nominal at 3 seconds			
Short Circuit	UPS shutdown, auto-recovery			
Battery Parameters				
Battery Type	Sealed, non-spillable, maintenance-free lead acid batteries			
Transfer Time	Typical <8 ms			
Back-Up Time (minutes) Full Load/Half Load	4/18	2/10	4/18	2/10
Recharge Time	8 hours to 90% capacity of full discharge			
Environmental				
Operating Temperature	0 °C to 50 °C			
Storage Temperature	-15 °C to 60 °C			
Relative Humidity	0 to 95%, non-condensing			
Ambient Operation	0-95% humidity non-condensing, 0-50 °C up to 6,600 ft. (2000m)			
Audible Noise	< 40dBA (1 meter from surface)			
Standards				
Approvals	UL Recognized Component, UPS Equipment UL 1778 5th Ed., CSA C22.2 No. 107.3, Suitable for UL 508 at full load output (no derating) and Ind. Control Equipment Applications CSA C22.2 No. 107.1, -Class 1 Division 2 - ANSI ISA 12.12.01/CSA 213 (Pending) Overvoltage Cat III, Pollution Degree III ODVA CONFORMANT™, ROHS ,			
EMC	FCC Part 15, Subpart B, Class A Level 4; EMC: EN62040-2; EN55032; CISPR22; EN61000-3-2; IEC61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -2-2			
Elevation	5000 ft. without derating			
Surge Protection	Meets IEEE C62.41, Category A			
Shock	Operating: IEC60068-2-27, Half Sine Wave: 10G for a duration of 11ms, shock for 1 direction (X axis) Non-operating: IEC60068-2-27, Half Sine Wave: 30G for duration of 11ms, 3 shocks for all 3 axes			
Vibration	Operating: IEC60068-2-6, Sine Wave: 10Hz to 500Hz @19.6m/S ² , displacement of 0.35mm, 60 min per axis for all X, Y, Z direction. Non-operating: IEC60068-2-6, Random : 5hz to 500Hz (2.09Grms); 20 min per axis for all X,Y,Z			
Mounting	To be mounted on DIN TS35/7.5 or TS35/15 rail system. Chassis mounting permissible via optional brackets (SDU-PMBRK).			

FLEXIBLE COMMUNICATION, CONTROL OPTIONS

The SDU AC - A Series UPS is tested and approved for use in industrial control equipment applications under UL 508 and CSA C22.2 No. 107.1 at the full output VA rating. Therefore, no derating is necessary. It's compact and lightweight design mounts directly to the installed DIN rail via the factory provided DIN RAIL clip, requiring no additional hardware. Optional mounting brackets and additional enhanced DIN clips are available when specific applications require an alternate mounting method or additional securing to the DIN RAIL. The SDU AC - A Series UPS allows for ease of installation and flexibility in your control enclosure designs.


Comm Card Accessories

Catalog Number	Description	Approx. Ship Weight - kg (lbs)
Active - (Industrial Ethernet)		
SDUENETIPCARD	2 Port EtherNet/IP™ COMM CARD	1.0 (28.4)
SDUECATCARD	2 Port EtherCAT COMM CARD	1.0 (28.4)
SDUMBUSCARD	2 Port Modbus® - TCP COMM CARD	1.0 (28.4)
SDUPNETCARD	2 Port Profinet Industrial Protocol COMM CARD	1.0 (28.4)
SDUPWRLNKCARD	2 Port POWERLINK COMM CARD	1.0 (28.4)
Passive		
SDUCFRELAYCARD	SDU CF Dry Contact I/O RELAY CARD	1.0 (28.4)

SDU Accessories

Catalog Number	Description	Approx. Ship Weight - kg (lbs)
SDU-PMBRK	Mounting brackets to secure UPS to wall, back of panel or enclosure.	16.0 (454.0)
SDUEDC	Enhanced DIN Clip to secure UPS to DIN rail	1.6 (45.3)

SDU CF Relay Card Connection Diagram

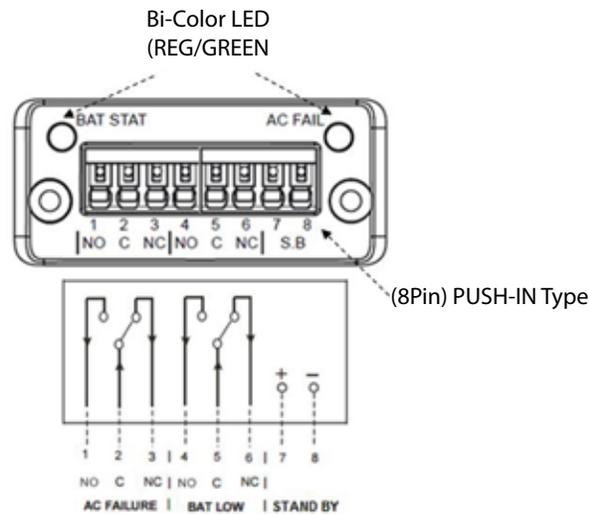


PROTECTING YOUR INVESTMENT

Description	Catalog Number	
	SDUCFRELAYCARD	Active Cards (Example: SDUENETIPCARD) <input type="checkbox"/>
	Input	
Nominal Voltage	+3.3 V ±5 %	
Standby signal	Active low via normally open momentary switch	
Frequency	50/60 Hz	
	Output	
LED Diagnostics	Refer to diagram	Refer to diagram NS = Network Status, MS=Module Status
Relay Logic Signals	Refer to diagram	—
Relay Contact Ratings	60V peak, 1A	—
Case/Enclosure Material	Housing: LCP(Liquid Crystal Polymer) Color: Natural, Thermoplastic,UL 94 V-0	
	Weight & Dimensions	
H x W x D, in. (mm)	0.91 x 2.0 x 2.2 (23 x 50 x 55) approximate	
Net Weight, oz. (g)	1.0 (28.4) approximate	
	Standards	
Immunity/Emissions	Emission EN 61000-6-4 EN55016-2-3 Radiated emission EN55022 Conducted emission Immunity EN 61000-6-2 EN61000-4-2 Electrostatic discharge, EN61000-4-3 Radiated immunity. EN61000-4-4 Fast transients/burst, EN61000-4-6 Conducted immunity	
Approvals [Ⓢ]	EN/IEC 60950-1 ; UL/CSA 60950-1 Pollution Degree 3; UL 508 Pollution Degree 3 CSA 107.1; EU ROHS2,China ROHS2	
Temperature °F (°C)	Storage: -40 to +185 (-40 to +85) Operating: -40 to +158 (-40 to +70) Convection cooling; no forced air required.	
Vibration	Operating: IEC60068-2-6, Sine Wave: 10Hz to 500Hz @19.6m/S ² , displacement of 0.35mm, 60 min per axis for all X, Y, Z direction. Non-Operating: IEC60068-2-6, Random : 5hz to 500Hz (2.09Grms); 20 min per axis for all X,Y,Z direction.	
Shock	Operating: IEC60068-2-27, Half Sine Wave: 10G for a duration of 11 ms, shock for 1 direction (X axis). Non-Operating: IEC60068-2-27, Half Sine Wave : 50G for duration of 11 ms, 3 shocks for each 3 directions.	
Humidity	0% to 90% RH, noncondensing; IEC 68-2-2, 68-2-3	
Warranty	2 Years	
MTBF (bellcore)	1,968,800 Hours	
General Protection/ Safety	Protected against Continuous short -circuit, Continuous overload, Continuous open circuit. Galvanic Isolation: I/P to O/P: 3KVac, I/P to GND: 1.5KVac, O/P to GND: 0.5KVac Protection class 1 (IEC536), degree of protection IP20 (IEC 529) Safe low voltage: SELV (acc. EN60950); ROHS	

[Ⓢ] Approvals apply for ActiveCards. Contact Technical support for Passive Cards.

PROTECTING CRITICAL LOADS, MAINTAINING RELIABILITY

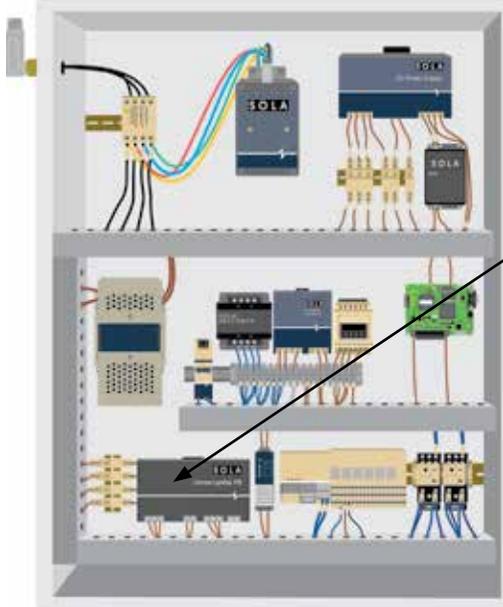

The SDU AC - A Series provides back-up protection for sensitive equipment in a control panel.



SECURE MOUNTING

This Off-Line UPS is designed to allow safe and secure mounting on a DIN Rail, in a control panel or as an integrated part of an enclosure or machine. Boasting a compact design and weight of approximately 5 kg (11 lbs), the SDU-A Series provides reliable and economical power protection to critical loads in locations exposed to power aberrations in the factory floor environment.



The SDU AC - A Series allows critical equipment to safely shutdown and for an orderly and quick restart preventing costly disruptions on the factory floor or within your facility maintaining your profit.

Emerson brings integrated manufacturing solutions to diverse industries worldwide. Our comprehensive product line, extensive experience, world-class engineering and global presence enable us to implement solutions that give our customers the competitive edge. Appleton is our premium line of lighting and electrical products for hazardous and industrial locations.

For over 150 years, our electrical product brands have been providing a rich tradition of long-term, practical, high quality solutions with applications ranging from the construction and safe operation of petrochemical and process plants to providing quality power that precisely controls automotive robotic production.

Engineers, distributors, contractors, electricians and site maintenance professionals around the world trust Emerson brands to make electrical installations safer, more productive and more reliable.

The Appleton Group business unit of Emerson is organized into three focused groups that provide distributors and end users expert knowledge and excellent service.

Electrical Construction Materials

This group is made up of the Appleton and O-Z/Gedney brands. They manufacture a broad range of electrical products including conduit and cable fittings, plugs and receptacles, enclosures and controls, conduit bodies and industrial and hazardous lighting. Whether the application is hazardous location, industrial or commercial, the electrical construction materials group has the products to meet your needs.

Power Quality Solutions

The SolaHD brand offers the broadest power quality line, including uninterruptible power supplies, power conditioners, voltage regulators, shielded transformers, surge protection devices and power supplies.

Heating Cable Systems

This group is made up of the EasyHeat and Nelson brands. They offer a broad range of electrical heating cable products for residential, commercial and industrial applications.

Asia/Pacific
+ 65.6556.1100

Australia
+ 61.3.9721.0348

Canada
+ 1.888.765.2226

China
+ 86.21.3338.7000

Europe
+ 33.3.22.54.13.90

Mexico/Latin America
+ 52.55.5809.5049

Middle East/Africa/India
+ 971.4.881.8100

United States
+ 1.800.621.1506

Appleton Group
9377 W. Higgins Road
Rosemont, IL 60018
1.800.621.1506
appletonelec.com

Connect with Appleton
Facebook | Twitter | YouTube

SOLAHD



Appleton Grp LLC d/b/a Appleton Group. EasyHeat, Inc. is a wholly owned subsidiary of Appleton Grp LLC. All other product or service names are the property of their registered owners. The Emerson logo is a trademark and a service mark of Emerson Electric Co. Appleton Grp LLC. All rights reserved. © 2017

EMERSON. CONSIDER IT SOLVED.™