


**PREPACKAGED SWITCH**

**SIB04S**

Switch, 20 Amp, 2 Position Maintained, On/On,  
 3 Wires, NEMA 1 Housing

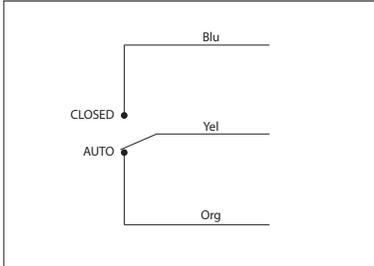

**SIB04S-RD**  
 • Red housing



**SPECIFICATIONS**

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Dimensions:** 1.70"H x 2.80"W x 1.50"D with 0.50" NPT nipple
- Housing Detail:** See **Housing A** in housing guide for dimensions
- Origin:** Made of US and non-US parts
- Wires:** 16", 600V Rated
- Approvals:** UL Listed, UL916, C-UL, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1

- Switch Ratings:**
- 20 Amp Resistive @ 277 Vac
- 1110 VA Pilot Duty @ 277 Vac
- 770 VA Pilot Duty @ 120 Vac
- 20 Amp Ballast @ 277 Vac
- 10 Amp Tungsten @ 120 Vac
- 2 HP @ 277 Vac
- 1 HP @ 120 Vac

- Notes:**
- Switch position label can be custom printed according to your needs, simply consult factory