


**PREPACKAGED SWITCH**

**SIB02S**

Switch, 20 Amp, 3 Position Maintained, Center Off, 3 Wires, NEMA 1 Housing

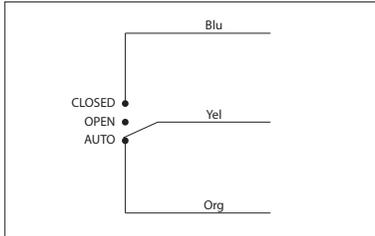

SIB02S-RD  
 • Red housing



**SPECIFICATIONS**

**Operating Temperature:** -30 to 140° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Dimensions:** 1.70"H x 2.80"W x 1.50"D with 0.50" NPT nipple  
**Housing Detail:** See **Housing A** in housing guide for dimensions  
**Origin:** Made of US and non-US parts  
**Wires:** 16", 600V Rated  
**Approvals:** UL Listed, UL916, C-UL, CE, RoHS  
**Housing Rating:** UL Accepted for Use in Plenum, NEMA 1

**Switch Ratings:**  
 20 Amp Resistive @ 277 Vac  
 1110 VA Pilot Duty @ 277 Vac  
 770 VA Pilot Duty @ 120 Vac  
 20 Amp Ballast @ 277 Vac  
 10 Amp Tungsten @ 120 Vac  
 2 HP @ 277 Vac  
 1 HP @ 120 Vac

**Notes:**  
 • Switch position label can be custom printed according to your needs, simply consult factory