


PREPACKAGED SWITCH

SIB05S

Switch, 20 Amp, 2 Position Maintained, On/Off, 2 Wires, NEMA 1 Housing

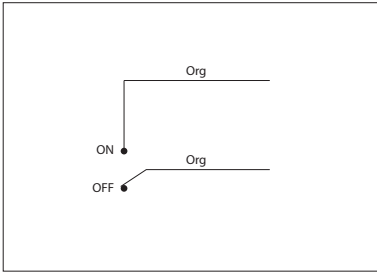


SPECIFICATIONS

Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Dimensions: 1.70"H x 2.80"W x 1.50"D with 0.50" NPT nipple
Housing Detail: See **Housing A** in housing guide for dimensions
Origin: Made of US and non-US parts
Wires: 16', 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Switch Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac
 10 Amp Tungsten @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Notes:
 • Switch position label can be custom printed according to your needs, simply consult factory

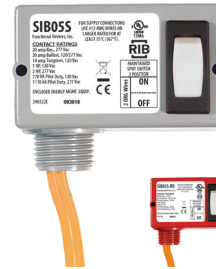

SIB05S-RD
 • Red housing