4X4X3 IMPACT LINE







0 0





Mechanical and Thermal	Test Spec.	Unit	Impact Line
Instrumented Dart Impact @ 73° F		in/lb.	565
Falling Ball Impact @ 73° F	UL-746	in/lb.	900
Deflection Temperature @ 264 psi	ASTM D648	Deg. F	270
Modulus of Elasticity	ASTM D790	ksi	340
Temperature Range		Deg. F	-40 to 265

IMPACT

Features and Benefits

- Standard Color light gray with a high gloss finish
- Best material bases, opaque covers and clear covers are all made of high-impact, UV resistant polycarbonate
- Easy ordering One part number equals one completely assembled enclosure
- Super easy use mounting flanges integral, so no extra hardware needed
- Flexible Interior Mounting bosses on rear wall and lid of opaque enclosure provide multiple mounting options for din rail, back panels, or other components
- Advanced face plate mounting system Brand new completely unique and easy
- Secure Choose your level of protection: pad lockable, tamper screw or tamper tag capable
- Frequency Friendly Available with absolutely no metals of any kind on the enclosure which is extremely favorable for sending and receiving wireless signals
- UL-50 / c-UL Listed (file # E207562)

Our Impact Line enclosures are the most versatile, feature packed, aesthetically pleasing, Nema UL rated, non-metallic enclosures available. Features like extremely durable, UV resistant, wide temperature range, easy to machine, lighter than other non-metallic or metal materials, the "Made in USA" Impact Line enclosures provide great value to any application.


((UL)		CE	Roh		ex pending conta tory for details	act
	Flamr	nable / UV Ratii	ngs Tes	t Spec.	Unit	Impact Line	
	Flame F	Rating - UL	ι	JL 94	-	5VA	
l	Outdoo	r UV Exposure		UL	-	f1	

P4043	4X IP66	6P IP68	Clear Cover	Opaque Cover	Integraged Mounting Flange	Standard Hinge	Low Profile Hinge	Integrated Locking Latch	Stainless Steel Locking Latch	Non-Metallic Locking Latch	Face Plate Mtg System*
P4043	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark		\checkmark			\checkmark
P4043C	\checkmark	\checkmark	\checkmark		\checkmark	\checkmark		\checkmark			\checkmark
P4043LL	\checkmark			\checkmark	\checkmark	\checkmark			\checkmark		\checkmark
P4043CLL	\checkmark		\checkmark		\checkmark	\checkmark			\checkmark		\checkmark
P4043LP	\checkmark	\checkmark		\checkmark	\checkmark		\checkmark	\checkmark			\checkmark
P4043LPC	\checkmark	\checkmark	\checkmark		\checkmark		\checkmark	\checkmark			\checkmark
P4043LPLL	\checkmark			\checkmark	\checkmark		\checkmark		\checkmark		\checkmark
P4043LPCLL	\checkmark		\checkmark		\checkmark		\checkmark		\checkmark		\checkmark
P4043NL	\checkmark			\checkmark	\checkmark	\checkmark				\checkmark	\checkmark
P4043CNL	\checkmark		\checkmark		\checkmark	\checkmark				\checkmark	\checkmark
P4043LPNL	\checkmark			\checkmark	\checkmark		\checkmark			\checkmark	\checkmark
P4043LPCNL	\checkmark		\checkmark		\checkmark		\checkmark			\checkmark	~

* Sold separately

4X4X3 IMPACT LINE



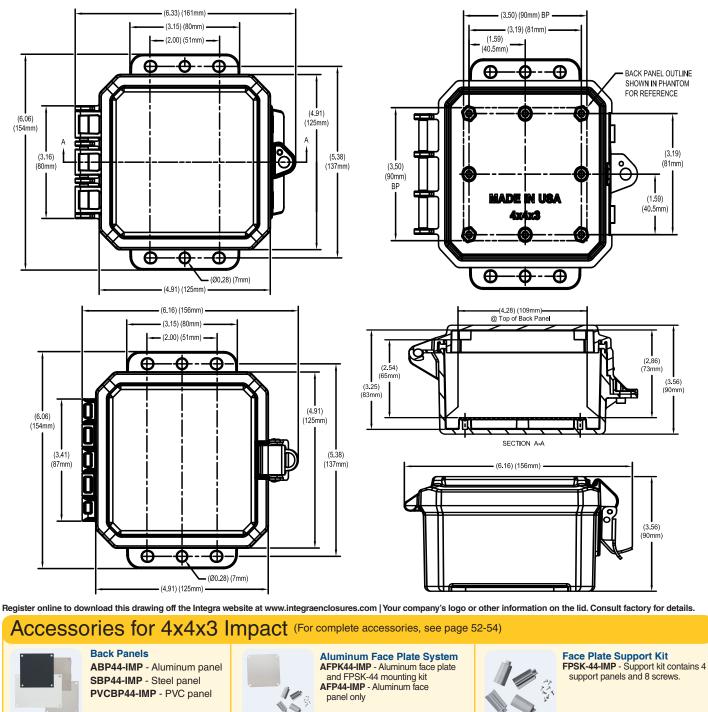



Din Rail DIN 4-IMP - 2 rails, 4 screws

111



Pole Mounting Kit PMKG-24-IMP - 2" pole PMKG-34-IMP - 3" pole PMKG-44-IMP - 4" pole PMKG-124-IMP - 12" pole

Steel Face Plate System

SFPK44-IMP - Steel face plate

and FPSK-44 mounting kit

SFP44-IMP - Steel face

panel only



Hole Plugs Liquid tight thru plugs. IP67 and UL rated. See page 53 for more details.

Cord Grips IP68/NEMA 4X/6P rated See page 53 for more details.