




**Application**

The ZS-CCV... weather shield provides moderate protection for valves which are mounted outdoors. This product is designed as a water tight enclosure. The housing allows easy mounting over the actuator, while allowing easy viewing of the actuator in operation. Weather shield for PICCV/CCV to provide protection for actuators in outdoor applications.

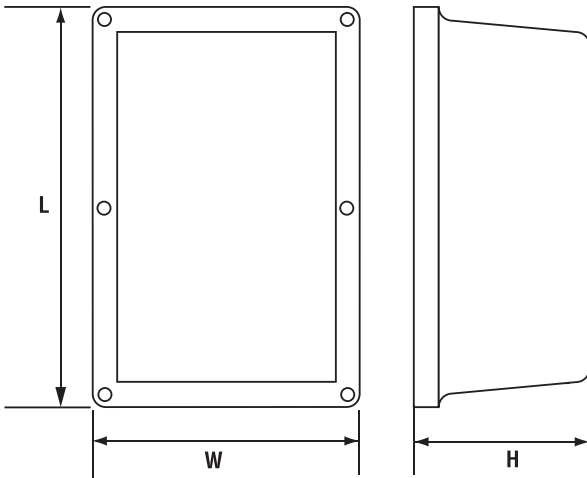

Specifications	
Cover	PETG with UV resistant smoke tint
Perimeter Gasket	Silicon Rubber
Rubber Gasket	Silicon Rubber
Spring Clips	Stainless Steel
Temperature limitations:	-22°F to 122°F (-30°C to 50°C)
Plate (ZS-CCV-100)	Aluminum
Plate	Galvaneal w/black powder coat

Part Number	Actuator
ZS - CCV - 90	LF, AF
ZS - CCV - 100	LRB(X), ARX
ZS - CCV - 110	AFRB(X)

L	W	H
16.25" [413]	8.75" [222]	4.5" [114]

**Parts List**

- Cover including Rubber Perimeter Gasket, Rubber Gasket
- Back Plate
- Anti-Rotation Post with screw and lock washer
- Valve Gasket
- Assorted Cap plugs for unused holes

- Screws AF - 2 bolts with nylon insert locking nuts
- LRB(X), ARX - 1 screw, 1 washer

**No weather shield available at this time for the TF and TR actuators. Designed for NEMA 4 specifications.**

\* Cannot be used with B6 series.

050905 - 05/12 - Subject to change. © Belimo Aircontrols (USA), Inc.