



RH ROOM

Relative Humidity Room, Thermistor

The ACI Relative Humidity with Thermistor Room Series utilizes a thermoset polymer capacitive sensing element with a factory fitted hydrophobic filter to improve its moisture resistance. The sensing elements multilayer construction also provides excellent resistance in applications where dust, dirt, oils and common environmental chemicals are found. The RH room sensors include on board DIP switches which allow the user to select the desired output signal and can be powered by AC or DC power sources. Single point field calibration can be performed by using the increment and decrement calibration DIP switches to adjust your curve up or down in +/- 0.5% increments with each toggle of the corresponding switches. These enhancements provide increased flexibility and outstanding long-term reliability without the need to replace the sensors in the field. There are two enclosure options in this series which should satisfy most commercial decors. Both enclosures feature four-way airflow to minimize self-heating. Three and Five-point NIST Calibration Certificates are available and must be ordered separately when placing your order.

commercial decors. Both enclosures feature four-way airflow to minimize self-heating. Three and Five-point NIST Calibration Certificates are available and must be ordered separately when placing your order.

Applications: Humidification, Dehumidification, Monitoring Indoor Space Humidity, Clean Rooms, Hospitals, Process Control, Laboratories, Museums, Schools, Office Buildings, Data Centers, ESD (Anti-Static) Control

The ACI RH Thermistors Room is covered by ACI's Five (5) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, www.workaci.com.

PRODUCT SPECIFICATIONS


RH Supply Voltage:	4-20 mA: 250 Ohm Load: 15 - 40 VDC / 18 - 28 VAC 500 Ohm Load: 18 - 40 VDC / 18 - 28 VAC
(Reverse Polarity Protected):	0-5 VDC: 12 - 40 VDC / 18 - 28 VAC 0-10 VDC: 18 - 40 VDC / 18 - 28 VAC
RH Supply Current (VA):	Voltage Output: 8 mA maximum (0.32 VA) Current Output: 24 mA maximum (0.83 VA)
RH Output Load Resistance:	4-20 mA: 700 Ohms maximum 0-5 VDC or 0-10 VDC: 4K Ohms Minimum
RH Output Signal:	2-wire: 4 - 20 mA (Factory Default) 3-wire: 0-5 or 0-10 VDC & 4 - 20 mA (Field Selectable)
RH Accuracy @ 77°F (25°C):	+/- 1% over 20% RH Range between 20 to 90% +/- 2%, 3%, or 5% from 10 to 95%
RH Measurement Range:	0-100%
Operating RH Range:	0 to 95% RH, non-condensing
Operating Temperature Range:	35 to 122°F (1.5 to 60°C)
Storage Temperature Range:	-40 to 149°F (-40 to 65°C)
RH Stability Repeatability Sensitivity:	Less than 2% drift / 5 years 0.5% RH 0.1% RH
RH Response Time (T63):	20 Seconds Typical
RH Sensor Type:	Capacitive with Hydrophobic Filter
RH Transmitter Stabilization Time:	30 Minutes (Recommended time before doing accuracy verification)
RH Connections Wire Size:	Screw Terminal Blocks (Polarity Sensitive) 16 (1.31 mm ²) to 26 AWG (0.129 mm ²)
RH Terminal Block Torque Rating:	4.43 to 5.31 lb-in (0.5 to 0.6 Nm)
RH NIST Test Points:	Default Test Points: 3 Points (20%, 50% & 80%) or 5 Points (20%, 35%, 50%, 65% & 80%) 1% NIST Test Points: 5 Points within selected 20% Range (ie. 30%-50% are 30, 35, 40, 45 & 50)

Nominal Thermistor Resistive Output @ 77°F (25°C) (Lead Wire Colors) Non-Linear NTC (Negative Temperature Coefficient):	RHx-1.8K Series: 1.8KΩ (Red/Yellow)	RHx-10KS Series: 10KΩ (White/Blue)
	RHx-3K Series: 3KΩ (White/Brown)	RHx-10K-E1 Series: 10KΩ (Gray/Orange)
	RHx-AN Series (Type III): 10KΩ (White/White)	RHx-20K Series: 20KΩ (Brown/Blue)
	RHx-AN-BC Series: 5.238KΩ (White/Yellow)	RHx-50K Series: 50KΩ nominal (Brown/Yellow)
	RHx-CP Series (Type II): 10KΩ (White/Green)	RHx-100KS Series: 100KΩ (Black/Yellow)
Thermistor Accuracy 32-158°F (0-70°C):	RHx-CSI Series: 10KΩ (Green/Yellow)	
	+/- 0.36°F (0.2°C) except 10K-E1 Series: +/- 0.54°F (0.3°C)	
Thermistor Power Dissipation Constant:	1.8K Series: +/- 0.9°F (0.5°C) @ 77°F (25°C) & +/- 1.8°F (1.0°C) from 32 to 158°F (0 to 70°C)	
Thermistor Sensor Response Time (T63):	3 mW/°C except 1.8K Series: 1 mW/°C; 10K-E1 Series: 2 mW/°C	
Thermistor Sensor Response Time (T63):	10 Seconds nominal	
Temperature Connections Wire Size:	Screw Terminal Blocks 16 (1.31 mm ²) to 26 AWG (0.129 mm ²)	
Temperature Terminal Block Torque Rating:	4.43 to 5.31 lb-in (0.5 to 0.6 Nm)	
Enclosure Material (Color):	"-R2" Enclosure: ABS (White) "-R" Enclosure: ABS (Beige)	
Enclosure Flammability Rating:	UL94-HB	
Product Dimensions (L x W x D):	"-R2" Enclosure: 4.50" (114.3 mm) x 2.75" (69.85 mm) x 1.12" (28.45 mm)	
	"-R" Enclosure: 4.50" (114.3 mm) x 2.75" (69.85 mm) x 1.12" (28.45 mm)	
Product Weight:	A/RHx-xx-R2 Series: 0.17 lbs. (0.077 kg) A/RHx-xx-R Series: 0.17 lbs. (0.077 kg)	
Agency Approvals:	CE, RoHS2, WEEE	





DIMENSIONAL DRAWING

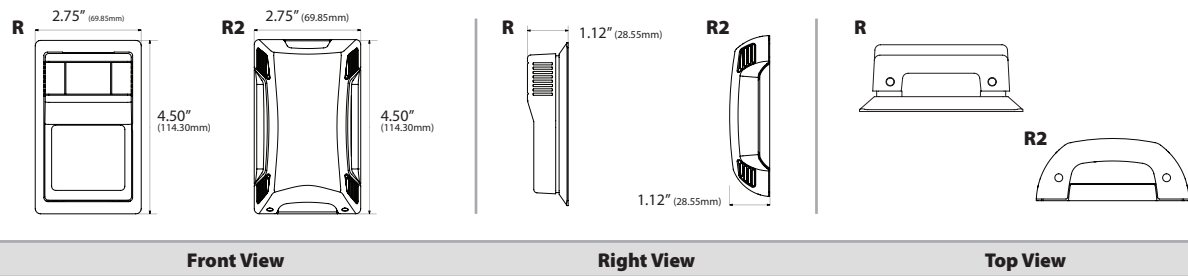

CUSTOM ORDERING

Model # Example: **A/** **RH2** **CP** **R50** **0 Ohms** **1K Ohms** **DA** **+ to -**
A. B. C. D. E. 1. 2. 3. 4.

MODEL #

A. Sensor Series <i>No Selection Required</i>	A/ 	A/
B. Accuracy <i>Select One (1)</i>	RH1 = +/--1% (Specify a 20% Range between 20 to 90% RH) RH2 = +/--2% RH3 = +/--3% RH5 = +/--5%	
C. Temperature Sensor <i>Select One (1)</i>	1.8K 3K 10KS AN (Type III) AN-BC CP (Type II) CSI 10K-E1 20K 50K 100KS	
D. Configuration <i>Select One (1)</i>	R = Room R2 = Room RO = Room with Override R2O = Room with Override RS = Room with Setpoint R2S = Room with Setpoint R50 = Room with Setpoint and Override R250 = Room with Setpoint and Override	
E. Output Signal <i>Select One (1)</i>	---- = 4 to 20 mA (Default) 0 to 10 VDC (Field Selectable) 0 to 5 VDC (Field Selectable)	
Setpoint Configuration Options <i>Select Options below if RS, R50, R2S or R250 was selected as a Configuration (C).</i>		
1. Offset Resistor <i>Select One (1)</i>	0 Ohms 51.1 Ohms 499 Ohms 750 Ohms 806 Ohms 1K Ohms 2K Ohms 2.49K Ohms 4.75K Ohms 6.19K Ohms 7.87 Ohms 10K Ohms 20K Ohms	
2. Potentiometer <i>Select One (1)</i>	400 Ohm 1K Ohms 2K Ohms 5K Ohms 8.5K Ohms 10K Ohms 20K Ohms 100K Ohms	
3. Setpoint Direction <i>Select One (1)</i>	DA = Direct Acting (Bottom to Top (Smaller to Larger)) RA = Reverse Acting (Bottom to Top (Larger to Smaller))	
4. Setpoint Indication <i>Select One (1)</i>	+ to - Cool Warm 55 to 85F 10-30C (R Only) Blue Red (R2 Only)	

Note: Outputs are field selectable between 4-20 mA, 0-5 VDC & 0-10 VDC

ACCESSORIES ORDERING

Model # Example: **A/MOUNTING PLATE BEIGE R** **-OR-** **106821**

Model #	Item #	Description
A/MOUNTING PLATE BEIGE R	106821	Wall Mounting Back Plate, Plastic, Beige ("R")
A/MOUNTING PLATE WHITE R2	143369	Wall Mounting Back Plate, Plastic, White ("R2")
LOCKING COVER	107370	Clear Thermostat Guard, Locking Cover, Low Profile
A/ROOM-FOAM-PAD	125690	1/8" Foam Insulation Pad with Adhesive (3" x 2", Black)

ACCESSORIES ORDERING (NIST)

Model # Example: **NIST RH CERT**

Model #	Description
NIST RH CERT	RH Calibration Certificate (Specify 3 Point or 5 Point NIST)

Note: When ordering NIST certificates, please add an additional line item under the corresponding A/RHx-xx-R/R2 Model Number

