



RH WALL PLATE

Relative Humidity, Wall Plate

The ACI Relative Humidity Stainless Plate utilizes a thermoset polymer capacitive sensing element with a factory applied hygroscopic filter to deliver a proportional analog voltage output signal. The hygroscopic filter provides added resistance to moisture, dust, and other chemicals for greater long term reliability. The RH Stainless Plate transmitter features integral DIP switches for field selection of the proper output signal and supply voltage to meet your applications requirements. Each unit also contains 0%, 50%, and 100% test options to verify that the transmitter is both working and properly installed. Field calibration can be performed by using the increment and decrement calibration DIP switches without the need to replace the sensing element. These enhancements provide increased flexibility and outstanding long-term reliability. All RH Stainless Plate transmitters come standard with an attractive brushed finish stainless steel, single gang wall mounting plate and are designed to mount over a single gang junction box in the wall. The PCBs are conformally coated for added protection from moisture and other contaminants. A temporary plastic sensor cover is included to provide protection for the RH sensor from chemicals used in wash down applications. Three and Five-point NIST Calibration Certificates are available but they must be ordered separately when placing your order.

Applications: Pharmaceutical, Hospitals, Operating Rooms, Vivariums, Clean Rooms, Process Control, Wash Down Environments & Stability Chambers

The ACI RH Wall Plate is covered by ACI's Five (5) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, www.workaci.com.


PRODUCT SPECIFICATIONS

RH Supply Voltage	0-5 VDC: 12 - 40 VDC / 18 - 28 VAC 0-10 VDC: 18 - 40 VDC / 18 - 28 VAC
(Reverse Polarity Protected):	
RH Supply Current (VA):	8 mA maximum (0.32 VA)
RH Output Load Resistance:	4K Ohms Minimum
RH Output Signal:	3-wire: 0-5 or 0-10 VDC
RH Accuracy @ 77°F (25°C):	+/- 2%, 3%, or 5% from 10 to 95%
RH Measurement Range:	0-100%
Operating RH Range:	0 to 95% RH, non-condensing (Conformally Coated PCB's)
Operating Temperature Range:	-40 to 140°F (-40 to 60°C)
Storage Temperature Range:	-40 to 149°F (-40 to 65°C)
RH Stability Repeatability Sensitivity:	Less than 2% drift / 5 years 0.5% RH 0.1% RH
RH Response Time (T63):	20 Seconds Typical
RH Sensor Type:	Capacitive with Hydrophobic Filter
RH Transmitter Stabilization Time:	30 Minutes (Recommended time before doing accuracy verification)
RH Connections Wire Size:	Screw Terminal Blocks (Polarity Sensitive) 16 (1.31 mm ²) to 26 AWG (0.129 mm ²)
RH Terminal Block Torque Rating:	4.43 to 5.31 lb-in (0.5 to 0.6 Nm)
RH NIST Test Points:	Default Test Points: 3 Points (20%, 50% & 80%) or 5 Points (20%, 35%, 50%, 65% & 80%)
Wall Plate Material:	430 Stainless Steel (Brushed Stainless Steel Finish)
Foam Material Foam Thickness:	Cross-linked LPDE (White) 0.25" (6.35 mm)
Foam Flammability Rating:	FMVSS-302
Sintered Filter Material:	304 Series Stainless Steel
Product Dimensions (L x W x D):	4.51" (114.56 mm) x 2.76" (70.10 mm) x 1.25" (31.75 mm)
Product Weight:	0.235 lbs. (0.107 kg)
Agency Approvals:	CE, RoHS2, WEEE





DIMENSIONAL DRAWING

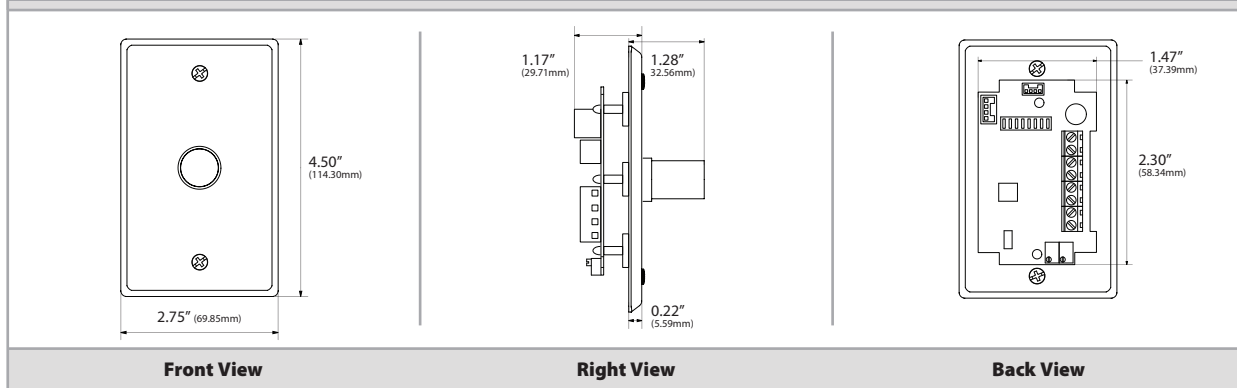

STANDARD ORDERING

Model # Example: **A/RH2-SP-05 -OR- 138922**

Model #	Item #	Description
A/RH2-SP-05	138922	RH Stainless Plate, +/- 2%, 0-5 VDC Output (default), 0-10 VDC (selectable)
A/RH2-SP-010	137895	RH Stainless Plate, +/- 2%, 0-10 VDC Output (default), 0-5 VDC (selectable)
A/RH3-SP-05	132739	RH Stainless Plate, +/- 3%, 0-5 VDC Output (default), 0-10 VDC (selectable)
A/RH3-SP-010	138166	RH Stainless Plate, +/- 3%, 0-10 VDC Output (default), 0-5 VDC (selectable)
A/RH5-SP-05	138291	RH Stainless Plate, +/- 5%, 0-5 VDC Output (default), 0-10 VDC (selectable)
A/RH5-SP-010	135158	RH Stainless Plate, +/- 5%, 0-10 VDC Output (default), 0-5 VDC (selectable)

CUSTOM ORDERING

Model # Example: **A/ RH2 SP 010**
A. B. C. D.

MODEL #

A. Sensor Series <i>No Selection Required</i>	A/ _____ →	A/
B. Accuracy <i>Select One (1)</i>	RH2 = +/-2% RH3 = +/-3% RH5 = +/-5%	
C. Configuration <i>No Selection Required</i>	SP = Stainless Plate _____ →	SP
D. Output Signal <i>Select One (1)</i>	010 = 0 to 10 VDC 05 = 0 to 5 VDC	

Note: Outputs are field selectable between 0-5 VDC & 0-10 VDC

ACCESSORIES ORDERING

Model # Example: **A/SINTERED FILTER -OR- 143433**

Model #	Item #	Description
A/SINTERED FILTER	143433	3/8" Sintered Filter for RH Duct/Stainless Plate/Remote Probes
A/1" VINYL PULL CAP	143462	1" EZ Vinyl Filter Cover for RH Stainless Plates & Remote Probes

ACCESSORIES ORDERING (NIST)

Model # Example: **NIST RH CERT**

Model #	Description
NIST RH CERT	RH Calibration Certificate (Specify 3 Point or 5 Point NIST)

Note: When ordering NIST certificates, please add an additional line item under the corresponding A/RHx-SP Model Number

