




DRAWINGS, DIMENSIONS AND WEIGHTS

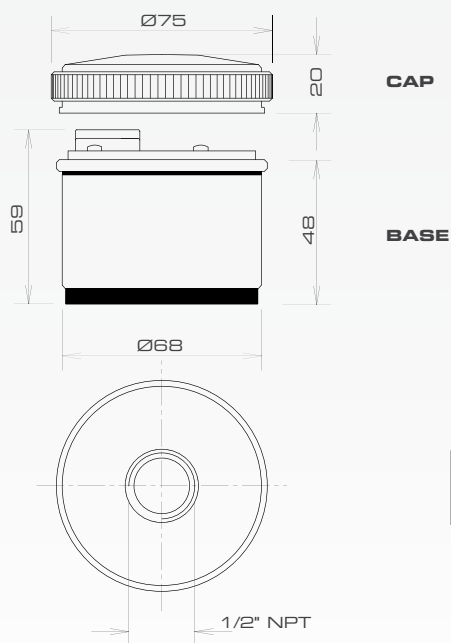

TWS BASE I PART NO

See page 19, section "BASES"

TWS BASE

Wiring base for the TWS range. With 1 common + 5 independent contacts, allows mounting of maximum 5 light modules or 4 light modules + 1 sounder module.

Provided with top cap to be used when the sounder module is not installed.

NOTE

Must be included with every stacklight

KEY CHARACTERISTICS

MAXIMUM NUMBER OF MODULES

5 light modules or 4 + 1 sounder module

VOLTAGES

Max 240V

PROTECTION GRADE

IP66, UL TYPE 4X, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP66/TYPER 4X protection grade guaranteed by a double polyurethane gasket installed on every module. A 1/2" NPT-F thread allows mounting of the complete accessory line. Can also be installed directly (without accessories) on the machinery by drilling the marked pre-holes and using the provided gasket

CERTIFICATIONS

