





Features:

The PW2 converts AC line voltage to regulated DC output.

This compact power supply may be used to power various DC operated peripherals and inputs/output modules on PLCs, or transmitters in process control.

- ◇ Regulated power outputs of 5 VDC, 12 VDC and 24 VDC
- ◇ 120V/60Hz Input
- ◇ Screw terminal connections
- ◇ Easily mounted in any plane
- ◇ Output DC voltages are isolated from AC line

Dimensions:

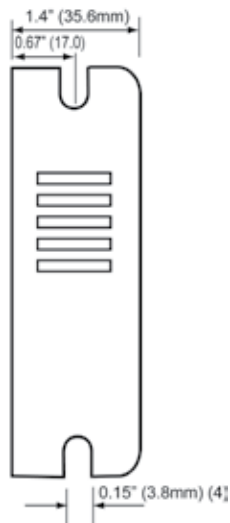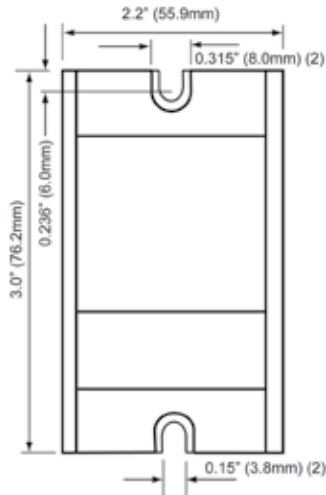

Specifications:

Voltage:	Input :	120 VAC \pm 5% / 60 Hz (external fuse recommended)
	Output:	5 V \pm 0.2 VDC @ 300 mA
		12 V \pm 0.5 VDC @ 200 mA
		24 V \pm 1 VDC @ 100 mA
Environment:	Operating Temperature:	0 to 55°C (32 to 130°F)
	Max. Humidity:	95% RH, noncondensing
Weight:		0.38 lb.
Mounting:		side or base

Ordering Information:

PART NUMBER	INPUT	OUTPUT
PW2-5	120 AC	5 VDC @ 300mA
PW2-12	120 AC	12 VDC @ 200mA
PW2-24	120 AC	24 VDC @ 100mA