

70-781D5R-1A

Socket, Legacy general purpose relay accessory, SPDT, 16A, 300 V, 5 pins, screw clamping terminal, 781R series



Main

Product range	Legacy
Product type	Socket
Product compatibility	relay 781XAXR diode 70-BSMD signalling device 70-BSMLG suppressor module 70-BSMM
Number of terminals	5
Switch function	SPDT
Contact composition	1 NC + 1 NO

Complementary

Line Rated Current	16 A
Rated voltage	300 V
Contact terminal arrangement	Mixed
Connections - terminals	screw clamp terminalsflexible screw clamp terminalssolid
Tightening torque	Chassis 0.8 N.m, AWG 12, copper Screw < 1 N.m, AWG 14, copper Screw < 0.8 N.m
Fixing mode	By screw M3.5, M3.5 By screw, M3
Shape of screw head	Combination roundhead Combination roundhead
Net Weight	1.09 oz (31 g)
Width	0.83 in (21 mm)
Depth	2.24 in (57 mm)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.

Environment

Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Ambient temperature range - operational	-40...131 °F (-40...55 °C)
IP degree of protection	IP20
Flame retardance	UL94-V0
Product certifications	UL CSA CE RoHS


Ordering and shipping details

GTIN	03606480779121
------	----------------

Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Approximate Dimensions

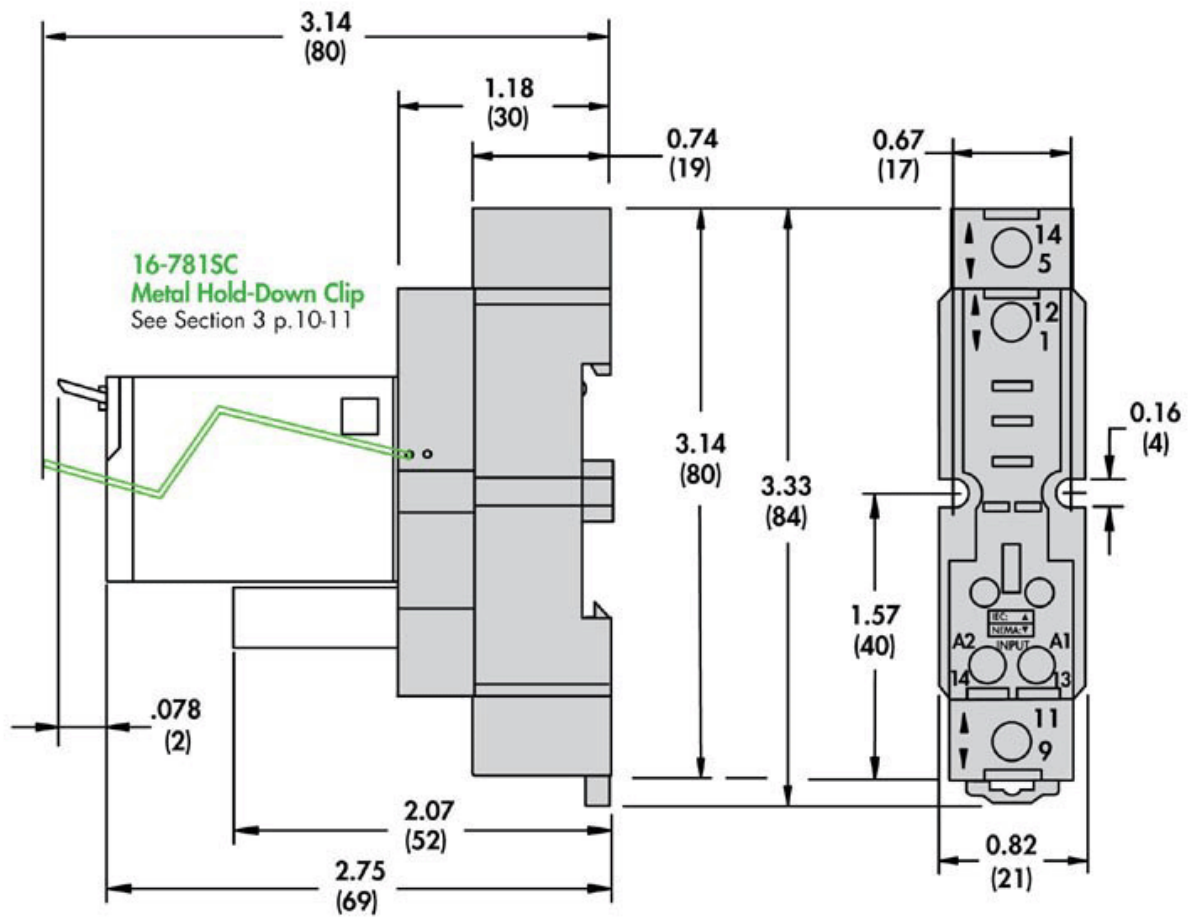

Connections and Wiring Diagrams

