


MATERIAL:
 MAKE FROM 14 GA STEEL W/CHROME PLATING

NOTE: Due to various manufacturing techniques,
 these dimensions may fluctuate slightly.
 The field installer should double check these
 dimensions against the actual component.

RECOMMENDED POSITION:
 LOCATE BETWEEN TOP
 AND MIDDLE HINGE
 REINFORCEMENT.

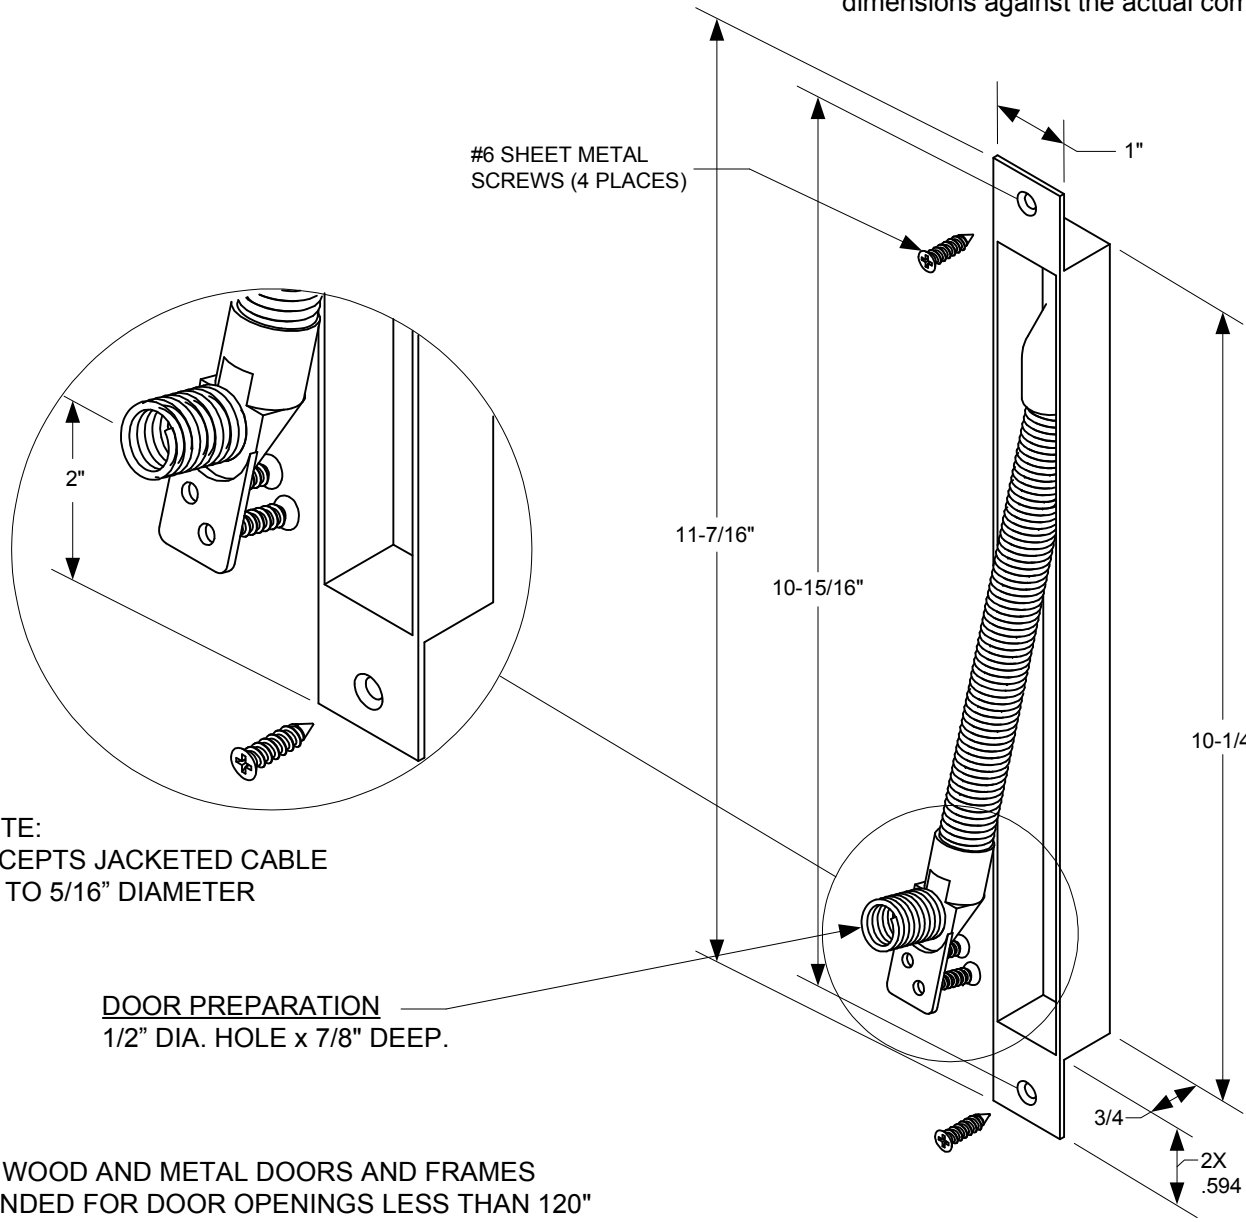

#6 SHEET METAL
 SCREWS (4 PLACES)

2"

11-7/16"

10-15/16"


10-1/4"

3/4"

2X
 .594

NOTE:
 ACCEPTS JACKETED CABLE
 UP TO 5/16" DIAMETER

DOOR PREPARATION
 1/2" DIA. HOLE x 7/8" DEEP.

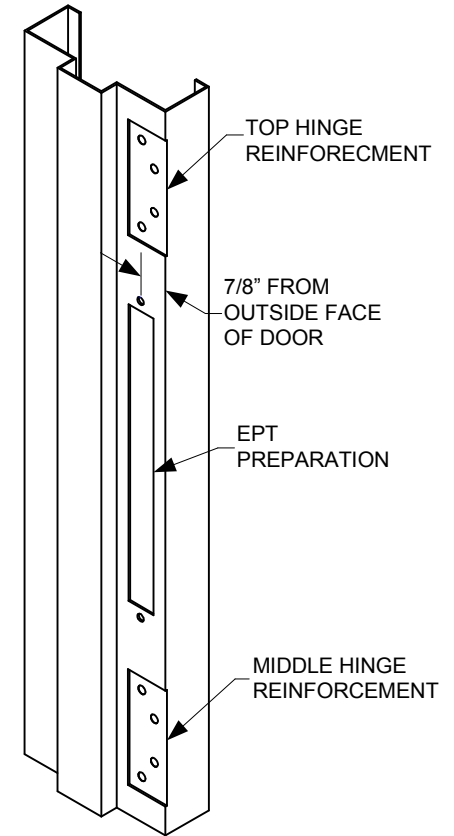

FRAME PREPARATION
 10.25" L x 1.00" W x .75" D

FOR WOOD AND METAL DOORS AND FRAMES
 INTENDED FOR DOOR OPENINGS LESS THAN 120"
 NOT INTENDED FOR CENTER HUNG DOOR APPLICATIONS

PART NO. PT-5	TITLE: POWER TRANSFER BOX		SECURITY DOOR CONTROLS 3580 Willow Lane Westlake Village CA 91361-4921 Tel. 805-494-0622 FAX: 805-494-8861	
DWG. NO.: INST-PT-5	DATE: 10-17-07	DRAWN BY: M. Scarpetta		