
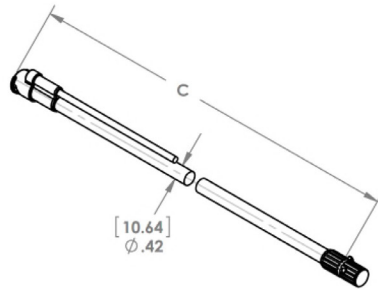


CURRENT TRANSFORMERS

ROPE SERIES

4000, 6000, 8000, and 10,000 Amp Revenue Grade Rogowski Coil Current Transformers with 70mV Output



SPECIFICATIONS

Environment: Indoor Use Only
5 to 176° F (-15 to 80°C)
90% relative humidity
Wires: 6', 24 AWG, 600V Rated
Phase Direction: Arrow points toward Load
Secondary Output: 175mV per 1KA AC @ 60 Hz (unburdened)

Accuracy: 0.75% (typical)
Linearity: 10%-120%
Polarity: Red-Hi, Black-Low
Frequency Range: 20-400 Hz
Max Sense Voltage: 600 Vac
Approvals: ETL Listed, CE, RoHS

ROPE SERIES SELECTION GUIDE

| Model # | Primary Input (A) | Dimension (A) | Dimension (B) | Dimension (C) | Ratio | Accuracy (%) |
|------------------|-------------------|---------------|---------------|---------------|--------------|--------------|
| ROPE16-040A-07MV | 4,000 | 5.0" | 5.8" | 16" | 4,000A/70mV | 0.75 |
| ROPE24-060A-07MV | 6,000 | 7.6" | 8.4" | 24" | 6,000A/70mV | 0.75 |
| ROPE36-080A-07MV | 8,000 | 11.5" | 12.3" | 36" | 8,000A/70mV | 0.75 |
| ROPE48-100A-07MV | 10,000 | 15.3" | 16.1" | 48" | 10,000A/70mV | 0.75 |