5X5X3 IMPACT LINE









Mechanical and Thermal	Test Spec.	Unit	Impact Line	
Instrumented Dart Impact @ 73° F		in/lb.	565	
Falling Ball Impact @ 73° F	UL-746	in/lb.	900	
Deflection Temperature @ 264 psi	ASTM D648	Deg. F	270	
Modulus of Elasticity	ASTM D790	ksi	340	
Temperature Range		Deg. F	-40 to 265	

IMPACT

Features and Benefits

- Standard Color light gray with a high gloss finish
- Best material bases, opaque covers and clear covers are all made of high-impact, UV resistant polycarbonate
- Easy ordering One part number equals one completely assembled enclosure
- Super easy use mounting flanges integral, so no extra hardware needed
- Flexible Interior Mounting bosses on rear wall and lid of opaque enclosure provide multiple mounting options for din rail, back panels, or other components
- Advanced face plate mounting system Brand new completely unique and easy
- Secure Choose your level of protection: pad lockable, tamper screw or tamper tag capable
- Frequency Friendly Available with absolutely no metals of any kind on the enclosure which is extremely favorable for sending and receiving wireless signals
- UL-50 / c-UL Listed (file # E207562)

Our Impact Line enclosures are the most versatile, feature packed, aesthetically pleasing, Nema UL rated, non-metallic enclosures available. Features like extremely durable, UV resistant, wide temperature range, easy to machine, lighter than other non-metallic or metal materials, the "Made in USA" Impact Line enclosures provide great value to any application.









Atex pending contact factory for details


Flammable / UV Ratings	Test Spec.	Unit	Impact Line
Flame Rating - UL	UL 94		5VA
Outdoor UV Exposure	UL	-	f1

P5053	4X IP66	6P IP68	Clear Cover		Integraged Mounting Flange	Standard Hinge	Low Profile Hinge	Integrated Locking Latch	Stainless Steel Locking Latch	Non-Metallic Locking Latch	Face Plate Mtg System*
P5053	✓	✓		✓	✓	✓		✓			✓
P5053C	✓	✓	✓		✓	✓		✓			✓
P5053LL	✓			✓	✓	✓			✓		✓
P5053CLL	✓		✓		✓	✓			✓		✓
P5053LP	✓	✓		✓	✓		✓	✓			✓
P5053LPC	✓	✓	✓		✓		✓	✓			✓
P5053LPLL	✓			✓	✓		✓		✓		✓
P5053LPCLL	✓		✓		✓		✓		✓		✓
P5053NL	✓			✓	✓	✓				✓	✓
P5053CNL	✓		✓		✓	✓				✓	✓
P5053LPNL	✓			✓	✓		✓			✓	✓
P5053LPCNL	✓		✓		✓		✓			✓	✓

* Sold separately



5X5X3 IMPACT LINE

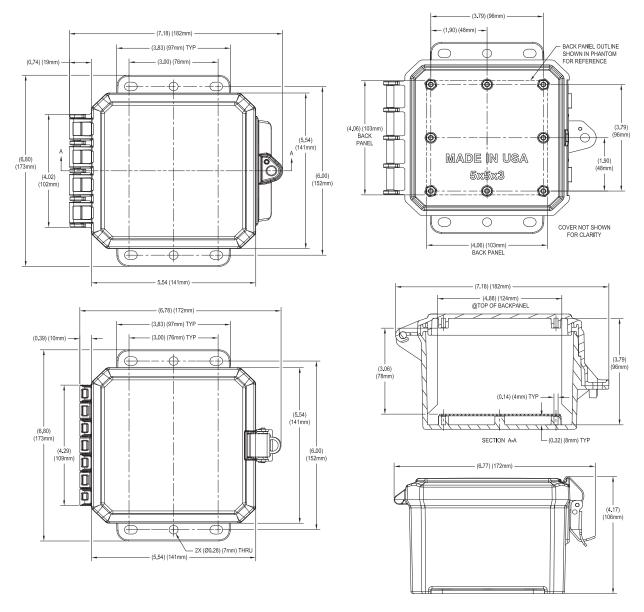

Register online to download this drawing off the integra website at www.integraenclosures.com | Your company's logo or other information on the ild. Consult factory for details.

